



BUZZI & BUZZI

Iron Reloaded.

Iron

Iron Reloaded.

Iron Reloaded.

Iron Reloaded.



08	INDEX BY NAME
09	INDEX BY CATEGORY
21	INDOOR
237	OUTDOOR
279	GENERAL INFORMATION

Forged

by

fire

Buzzi & Buzzi con la sua trentennale esperienza nell'utilizzo di materiali innovativi realizza una nuova linea di prodotti in metallo.

Alluminio, ottone e acciaio gli elementi base per la creazione di una collezione sia indoor che outdoor che aumentano la possibilità di utilizzo in nuovi e maggiori campi di applicazione, con l'attenzione ai dettagli che da sempre contraddistingue il brand.

Buzzi & Buzzi, with its thirty years of experience in the use of innovative materials, realizes a new line of iron products.


Aluminium, brass and steel are the basic elements for the creation of a collection which is both indoor and outdoor, increasing the possibility of use in new and greater fields of application, with attention to details which has always distinguished the brand.

56	B-INSIDE	216	Q1
62	B30	118	Q1 220V
68	B55	34	Q1 48V
48	C1	122	Q2 220V
268	DB9	126	Q3 220V
272	DB10	130	Q4 220V
276	DB11	36	Q4 48V
246	F40	260	S1
158	F50	264	S1G
170	Genius Basic Naked	230	The Dark
242	Genius Basic Naked IP65	226	The Line
180	Genius Concrete	222	The Tube
172	Genius Naked	46	The Tube 48V
244	Genius Naked IP65	178	Twin Genius Naked
138	GL 220V	186	X1
44	GL 48V	104	X1 220V
250	H2NOT	26	X1 48V
254	H2STOP	78	X1 Nano 48V
132	Inciso Q4 220V	192	X2
38	Inciso Q4 48V	198	X3
50	L1	202	X4
144	L40	162	XJR8
212	M1	166	XJR9
114	M1 220V	206	Y1
32	M1 48V	106	Y1 220V
232	Mikado	28	Y1 48V
136	ML 220V	156	Y1D
42	ML 48V	210	Z1
86	N-INSIDE	110	Z1 220V
92	N10	30	Z1 48V
		80	Z1 Nano 48V


21 Indoor

23 48V Systems

LIGHT MODULES

					
C1 48	GL 48V 44	INCISO Q4 48V 38	L1 50	M1 48V 32	ML 48V 42
					
Q1 48V 34	Q4 48V 36	THE TUBE 48V 46	X1 48V 26	Y1 48V 28	Z1 48V 30

TRACKS

		
B-INSIDE 56	B30 62	B55 68

23 48V Systems

NANO TRACKS
LIGHT MODULES



X1 NANO 48V
78

Z1 NANO 48V
80

NANO TRACKS



N-INSIDE
86

N10
92

101 220V Systems

LIGHT MODULES



GL 220V
138



INCISO Q4 220V
132



M1 220V
114



ML 220V
136



Q1 220V
118



Q2 220V
122



Q3 220V
126



Q4 220V
130



X1 220V
104



Y1 220V
106



Z1 220V
110




TRACKS



L40
144

153 Stand alone

RECESSED

					
F50 158	GENIUS BASIC NAKED 170	GENIUS CONCRETE 180	GENIUS NAKED 172	TWIN GENIUS NAKED 178	XJR8 162


	
XJR9 166	Y1D 156

SURFACE


					
M1 212	Q1 216	X1 186	X2 192	X3 198	X4 202
					
Y1 206	Z1 210				

153 Stand alone

SUSPENDED



MIKADO
232



THE DARK
230



THE LINE
226



THE TUBE
222

237 Outdoor

239 Stand alone


RECESSED



F40
246



GENIUS BASIC
NAKED IP65
242



GENIUS NAKED
IP65
244



H2NOT
250



H2STOP
254


SURFACE



DB9
268



DB10
272



DB11
276



S1
260




S1G
264





Q2
SUPERFUTUREDESIGN*

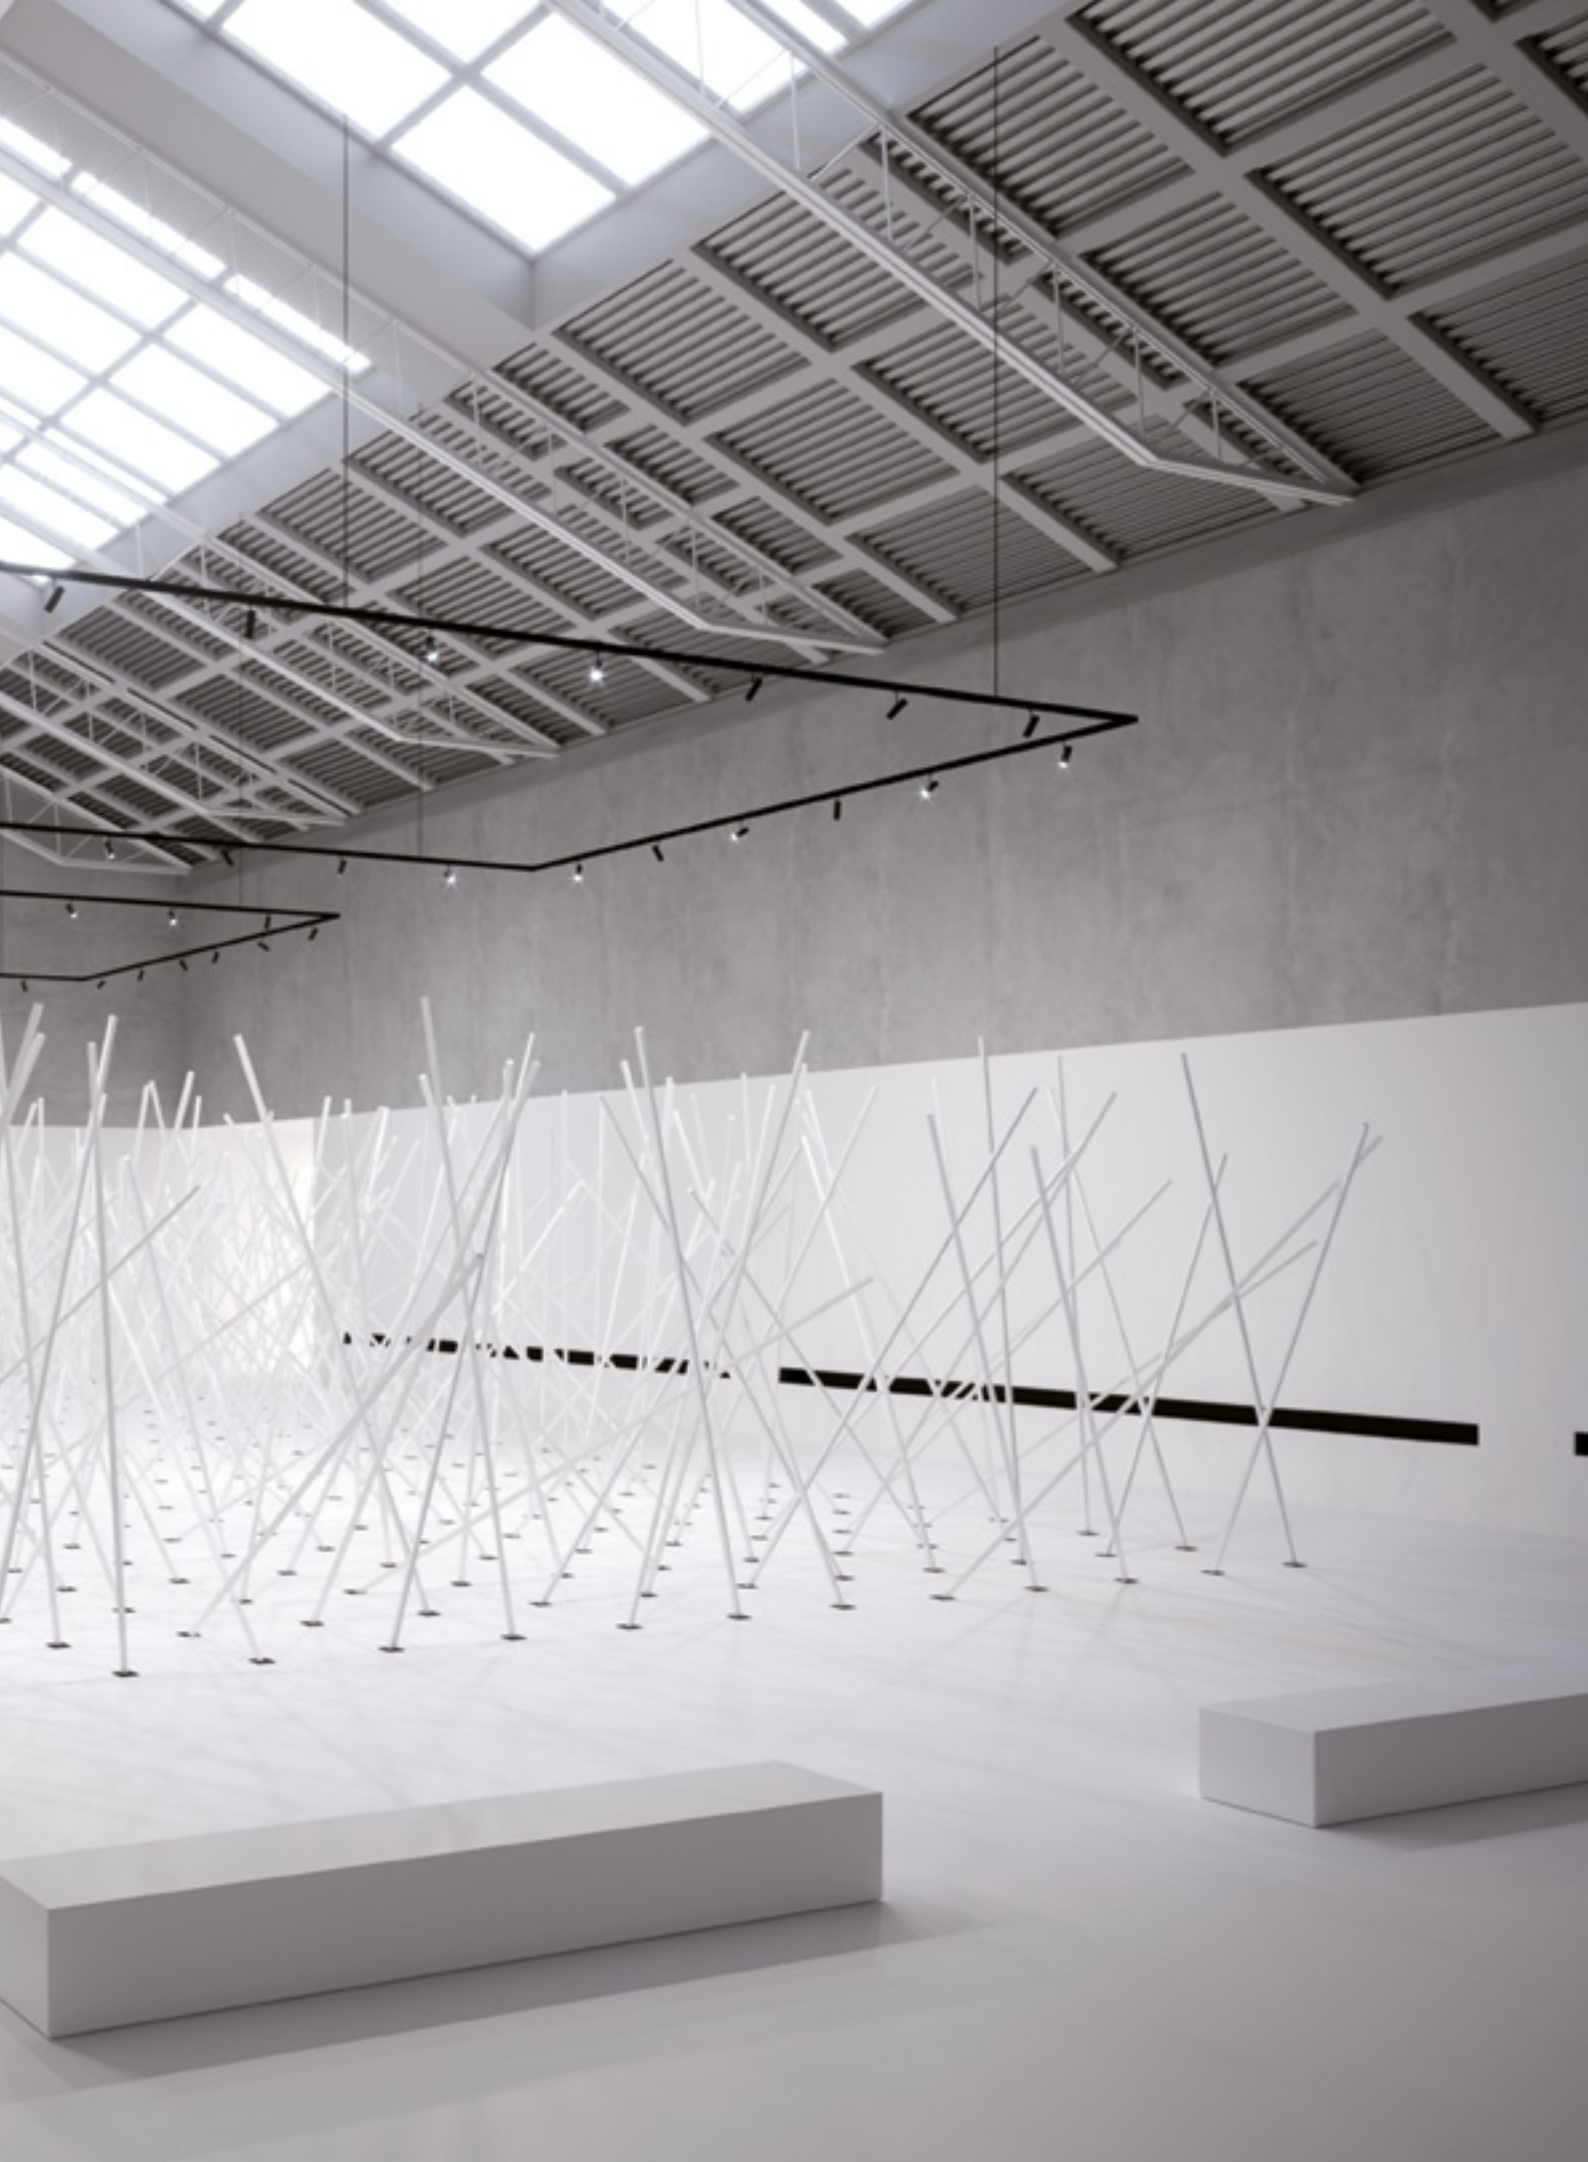

How to read the catalogue

nome prodotto
product name

certificazioni
certifications

Y1



finiture disponibili
available finishing



matt white painted



chromed



matt black painted



anodised brass

Y1 è un proiettore cilindrico per ambienti interni, adatto per installazioni a soffitto o parete, con dimensioni molto ridotte per un minimo impatto visivo della sorgente.

Ha finitura di serie bianca, nera opaca, brass e cromo e lenti intercambiabili.

Y1 è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con linearità ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.

Y1 is a cylindrical projector for indoor environments, suitable for ceiling or wall installations, with small dimensions for minimum visual impact of the light source.

It is produced with a white, black or brass and chromed finishings with interchangeable optics.

Y1 is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with linearity and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.

206 |

descrizione prodotto
product description


Indoor Surface stand alone

sezione
section


disegno quotato in mm
drawing quoted in mm

composizione del codice
code composition

informazioni tecniche
technical features



A



B

CODE COMPOSITION

1111 4 S E ND

light colour

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
CP	chromed
BR	brass

1112 4 S E WD

light colour

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
CP	chromed
BR	brass

example of code composition

1111 WH 4 S 22 E 30 ND

TECHNICAL FEATURES

Code	1111 XX (fig. A)	1112 XX (fig. B)
Type	Projector ± 360° / ± 90° 	Projector ± 360° / ± 90°
Material	Aluminum	Aluminum
Finishing	White Black Chromed Brass	White Black Chromed Brass
Weight	0.4 Kg	0.4 Kg
Mounting	Wall and ceiling	Wall and ceiling
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver on board (included)	Constant current electronic driver, remote installation (not included)
Lamp type	LED 700 mA 	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 x 8W	1 x 8W
Luminous efficacy	800 lm - 3000K	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V - 50/60Hz	By driver (optional)
CRI	>90	>90
Emergency	On request	On request
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and driver box for Y1 chromed and anodised brass.	On request available dimmable PUSH or DALI, remote installation. Black tige and box for Y1 chromed and anodised brass.

accessori opzionali
optional accessories

Indoor

A modern interior space, likely a lounge or waiting area. On the right, a curved wall is covered in a gold-colored perforated metal screen. To the left, there's a white modular sofa and several large potted plants. The ceiling features track lighting, and the floor is highly reflective. A large, stylized letter 'A' is visible on the right wall. The overall design is clean and contemporary.

26	X1 48V
28	Y1 48V
30	Z1 48V
32	M1 48V
34	Q1 48V
36	Q4 48V
38	Inciso Q4 48V
42	ML 48V
44	GL 48V
46	The Tube 48V
48	C1
50	L1

48V

LIGHT MODULES

X1 48V



matt white painted



anodised champagne



matt black painted



anodised rose gold

X1 48V è un apparecchio illuminante da interni per binario 48V, disponibile con finitura bianca, nera, anodizzata champagne o rose gold e lenti intercambiabili. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°.


Una luce che valorizza spazi e ambienti con eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Il proiettore X1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

X1 48V is a 48V track light fitting for interiors, available in a black, white, champagne or rose gold anodised finish with interchangeable lenses.

Featuring a high-performance projector with a minimal design to have a minimum visual impact, it is fitted with a directional arm 360° adjustable on a vertical axis and 90° on a horizontal one.

A light which enhances spaces and environments with elegance, making every detail the protagonist within the project space.

The X1 48V projector has an LED (COB) CRI >90, 3000K (2700K/4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00001		0	
		<i>dimmiability</i>	
ND	non dimmable		
DA	DALI		
11	1-10V		
		<i>light colour</i>	
27	2700K		
30	3000K		
40	4000K		
		<i>lens</i>	
22	22°		
50	50°		
		<i>finishing</i>	
W1	white		
B1	black		
A1	champagne		
A2	rose gold		

example of code composition

T048 L 00001 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00001 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	Black tige for X1 48V anodised champagne and anodised rose gold.

Y1 48V



matt white painted



chromed




matt black painted



anodised brass

Y1 48V è un proiettore cilindrico per ambienti interni per binari a 48V, con dimensioni molto ridotte per un minimo impatto visivo della sorgente. Con finitura bianca, nera, cromo, ottone e lenti intercambiabili, Y1 48V è dotato di un sistema di braccio orientabile sull'asse verticale di 360° e orizzontale di 90°, dagli snodi a scomparsa. Ha un output luminoso in grado di valorizzare gli ambienti, grazie alla sorgente retrocessa che garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo. Il proiettore Y1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

Y1 48V is a 48V track cylindrical projector for interior spaces with very small dimensions for a minimum visual impact of the source. In a black, white, chromed, brass finish and interchangeable lenses, Y1 48V is fitted with a 360° adjustable arm on the 360° vertical axis and 90° horizontal axis, with incorporated joints. It has a light output which can enhance spaces thanks to the recessed source which guarantees the reduction of dazzling, for maximum visual comfort. The Y1 48V projector has an LED (COB) CRI >90, 3000K (2700K/4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00002		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
11	1-10V	
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
22	22°	
50	50°	
		<i>finishing</i>
W1	white	
B1	black	
CP	chromed	
BR	brass	

example of code composition

T048 L 00002 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00002 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 8W
Luminous efficacy	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	Black tige for Y1 48V chromed and anodised brass.

Z1 48V



matt white painted




matt black painted

Z1 48V è un apparecchio per binari a 48V caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale. Disponibile con finitura di serie bianca o nera, Z1 48V è un prodotto che garantisce alte prestazioni con il minimo impatto visivo.

Il proiettore Z1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore a binario.

Z1 48V is a 48V track fitting characterised by a miniaturised projector with a diameter of only 23 mm, completely directional on vertical and horizontal axes. Available in a standard white or black finish, Z1 48V is a product which guarantees high performances with a minimum visual impact.

The Z1 48V projector has an LED (COB) CRI >90, 3000K (2700K/4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.

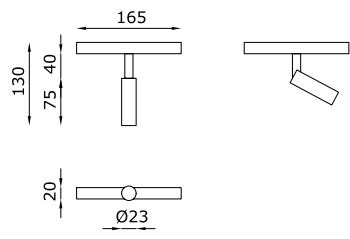

CODE COMPOSITION

T048 L 00003		0	
		<i>dimmiability</i>	
ND		non dimmable	
DA		DALI	
11		1-10V	
		<i>light colour</i>	
27		2700K	
30		3000K	
40		4000K	
		<i>lens</i>	
22		22°	
50		50°	
		<i>finishing</i>	
W1		white	
B1		black	

example of code composition T048 L 00003 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00003 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.4 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	-

M1 48V




M1 48V per binario a 48V è un proiettore con tige completamente direzionabile a 360°, il quale permette di dirigere la luce in modo diretto verso singoli dettagli dello spazio. Dal design minimale, con luce spot, M1 48V è disponibile anche con ottiche differenti.

Il proiettore M1 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno del binario.

M1 48V 48V track fitting is a projector with completely directional 360° linkage, which makes it possible to direct light in a direct way towards individual details of the space. With a minimal design, spotlight, M1 48V is also available with different optics.

The M1 48V projector has an LED (COB) CRI >90, 3000K (2700K/4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.

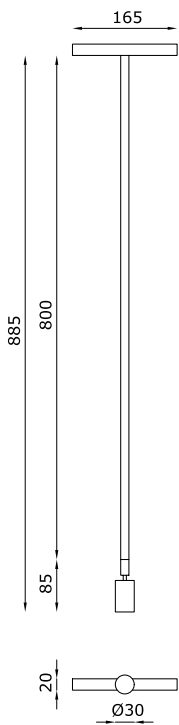

CODE COMPOSITION

T048 L 00004		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
11	1-10V	
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
22	22°	
50	50°	
		<i>finishing</i>
W1	white	
B1	black	

example of
code composition

T048 L 00004 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00004 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.75 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	-

Q1 48V



matt white painted




matt black painted

Proiettore per binario 48V ad alte performance in alluminio verniciato a polvere: Q1 48V è un apparecchio per interni che garantisce il minimo impatto visivo.

Completamente orientabile a 360°, è disponibile in più varianti ottiche. Il proiettore Q1 48V ha sorgente luminosa a LED (COB) CRI 90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno del binario.

48V track projector with high performances in powder varnished aluminium Q1 48V is a fitting for interiors which guarantees minimum visual impact.

360° completely adjustable. It is available in a variety of optics. The Q1 48V projector has an LED (COB) CRI >90, 3000K (2700K/4000K light source on request) fed in direct current with incorporated convertor located inside the track adaptor.



CODE COMPOSITION

T048 L 00005		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
11	1-10V	
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
12	12°	
24	24°	
38	38°	
		<i>finishing</i>
W1	white	
B1	black	


example of code composition

T048 L 00005 **W1 12 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00005 XX
Type	Projector $\pm 360^\circ$ / $\pm 90^\circ$
Material	Aluminum
Finishing	White Black
Weight	0.8 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 12W
Luminous efficacy	1550 lm - 3000K
Light distribution	Beam 24° Beam 12° 38° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	-

Q4 48V

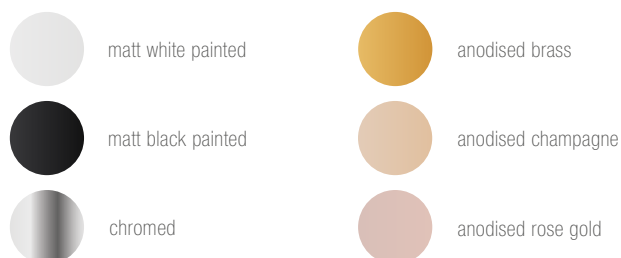


Q4 48V per binario a 48V è un apparecchio per interni che garantisce il minimo impatto visivo, completamente orientabile a 360°, è disponibile in più varianti ottiche.

Proiettore ad alte performance in alluminio disponibile in diverse finiture: nero, bianco, cromo, ottone, anodizzato champagne e rose gold.

Il proiettore Q4 ha sorgente luminosa a LED (COB) CRI 90, 3000K (2700K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore a binario.

The Q4 48V 48V track projector is a fitting for interiors which guarantees minimum visual impact. 360° completely adjustable. It is available in a variety of optics. A projector with high performances in aluminium available in various finishes: black, chromed, brass, anodised champagne and rose gold.

The Q4 projector has an LED (COB) CRI >90, 3000K (2700K light source on request) fed in direct current with incorporated convertor located inside the track.

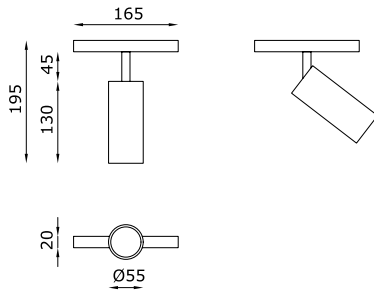

CODE COMPOSITION

T048 L 00008		0	
		<i>dimmiability</i>	
ND		non dimmable	
DA		DALI	
11		1-10V	
		<i>light colour</i>	
27		2700K	
30		3000K	
		<i>lens</i>	
14		14°	
35		35°	
55		55°	
		<i>finishing</i>	
W1		white	
B1		black	
CP		chromed	
BR		brass	
A1		champagne	
A2		rose gold	

example of code composition

T048 L 00008 **W1 14 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00008 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 35° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	Black tige for Q4 48V chromed, anodised brass, anodised champagne and anodised rose gold.

INCISO Q4 48V



INCISO Q4 per binario 48V è un proiettore per interni dalle caratteristiche uniche. Si tratta infatti del primo proiettore in cemento DurCoral® con un'anima in acciaio.


INCISO Q4 48V mantiene le stesse caratteristiche tecniche di Q4 48V, ma dal punto di vista estetico l'utilizzo del materiale DurCoral®, permette di plasmare la materia, incidere e creare dei motivi che lo rendono unico nella sua categoria.

La ricerca dei materiali che contraddistingue la collezione Buzzi & Buzzi si unisce alla tecnologia IRON per dare vita ad un prodotto innovativo. DurCoral® è un materiale due volte più resistente del cemento, antigraffio, personalizzabile con qualsiasi tipo di pittura e dalle elevate prestazioni meccaniche.

The 48V track INCISO Q4 is a projector for interiors with unique characteristics. In fact it is the first projector made in DurCoral® cement with a steel core.

INCISO Q4 48V retains the same technical characteristics as the Q4 48V, but from the aesthetic point of view, the use of DurCoral® allows the material to be moulded and engraved to create patterns that make it unique in its category.

The research into the materials that characterise the Buzzi & Buzzi collection combine with the IRON technology to create an innovative product. DurCoral® is a material twice as resistant as cement, scratch-proof, customisable with any type of paint and has high mechanical performances.

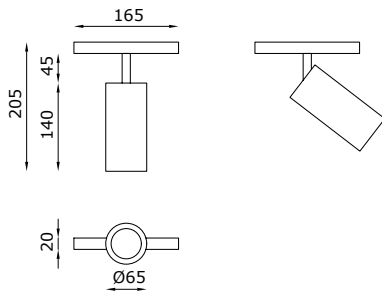

CODE COMPOSITION


T048 L 00016		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
11	1-10V	
		<i>light colour</i>
27	2700K	
30	3000K	
		<i>lens</i>
14	14°	
35	35°	
55	55°	
		<i>finishing</i>
T1	see texture below	
T2	see texture below	
T3	see texture below	
T4	see texture below	

TECHNICAL FEATURES


Code	T048 L 00016 XX
Type	Projector ± 360° / ± 90°
Material	DurCoral®
Finishing	T1 T2 T3 T4
Weight	0.6 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 35° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	-

example of code composition


T048 L 00016 **T1 14 27 ND 0**




T1



T2



T3



T4






ML 48V



Un punto di vista puntuale, in grado di enfatizzare particolari e spazi esclusivi: ML 48V, apparecchio illuminante da interni per installazione su binario a 48V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, è studiato per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse orizzontale e verticale di 360°.

A punctual point of view able to emphasize details and exclusive spaces: ML 48V, installable on 48V rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically.



CODE COMPOSITION

T048 L 00009		0
<i>dimmiability</i>		
ND	non dimmable	
DA	DALI	
11	1-10V	
<i>light colour</i>		
27	2700K	
30	3000K	
<i>lens</i>		
24	24°	
38	38°	
<i>finishing</i>		
W1	white	
B1	black	

example of code composition T048 L 00009 W1 24 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00009 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	1 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3300 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	48 VDC
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	-


GL 48V



matt black painted

GL 48V, apparecchio illuminante da interni per installazione su binario a 48V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, è studiato per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse orizzontale e verticale di 360°.

A punctual point of view able to emphasize details and exclusive spaces: GL 48V, installable on 48V rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically.



CODE COMPOSITION

T048 L 00010 B1 0	
dimmiability	
ND	non dimmable
DA	DALI
11	1-10V
light colour	
27	2700K
30	3000K
40	4000K
lens	
24	24°
38	38°

example of code composition T048 L 00010 B1 24 27 ND 0

TECHNICAL FEATURES

Code	T048 L 00010 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	Black
Weight	1 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3600 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	-

THE TUBE 48V




MASSIMA POTENZA IN 15 mm DI DIAMETRO.

The Tube 48V è una sospensione dal design minimale per binario 48V. Il suo diametro di soli 15 mm la rendono estremamente discreta ed elegante nelle forme. Disponibile in diverse finiture bianco, nero, cromo, anodizzato champagne e rose gold. Dotato di sorgente LED di ultima generazione con un output luminoso in grado di far emergere singoli dettagli all'interno dello spazio.

MAXIMUM POWER IN A DIAMETER OF 15 mm.

The Tube 48V is a pendant fitting with minimal design for 48V track. Its diameter of only 15 mm makes it extremely discrete and elegant in shape. Available in various finishes; white, black, chromed, anodised champagne and rose gold. Witted with the latest generation LED source with a light output able to highlight individual details within the space.

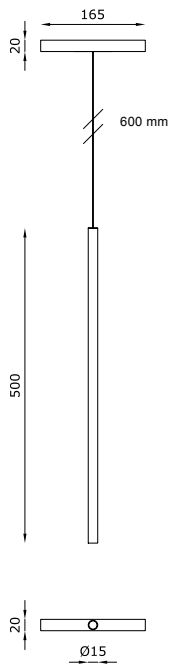

CODE COMPOSITION

T048 L 00011	00	0
	<i>dimmiability</i>	
ND	non dimmable	
DA	DALI	
11	1-10V	
	<i>light colour</i>	
27	2700K	
30	3000K	
	<i>finishing</i>	
W1	white	
B1	black	
CP	chromed	
A1	champagne	
A2	rose gold	


example of
code composition

T048 L 00011 **W1** 00 **27** ND 0

TECHNICAL FEATURES

Code	T048 L 00011 XX
Type	Suspension lamp 
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED 
Lamp wattage	1 x 4.5W
Luminous efficacy	360 lm - 3000K
Light distribution	Narrow beam
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	48 VDC
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	Black silicon cable (L 600 mm). On request different lenght.

C1

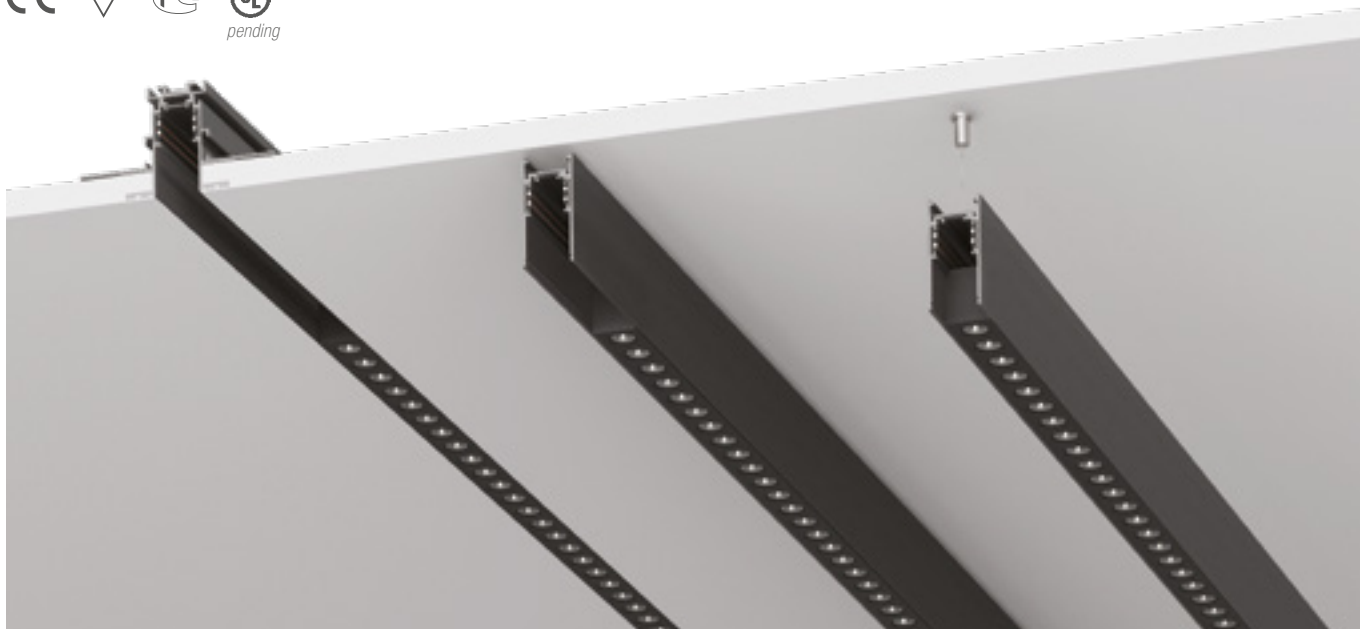


TOTALMENTE A SCOMPARSA NEI BINARI B-INSIDE E B55


C1 è un modulo LED lineare per ambienti interni, adatto per installazioni su binario 48V per la serie B-INSIDE e B55. È disponibile in due lunghezze (565 mm e 1130 mm) e con tre ottiche differenti (20°, 30° e 26° x 42°) che permettono di illuminare in modo diretto gli spazi. Il prodotto con UGR <15 (lente 20°), <14 (lente 30°) e <18 (lente 26° x 42°) è adatto a tutte le situazioni in cui è richiesto uno specifico antiabbagliamento.

TOTALLY RECESSED INTO THE B-INSIDE AND B55 TRACKS

C1 is a linear LED module for interiors, suitable to be installed on a 48V track for the B-INSIDE and B55 series and with three different lengths (565 mm and 1130 mm) and with three different optics (20°, 30° and 26° x 42°) allowing spaces to be lit directly. The product with UGR <15 (lens 20°), <14 (lens 30°) e <18 (lens 26° x 42°) is suited to all situations in which a specific anti-dazzle effect is required.

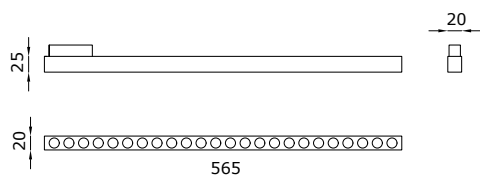

A

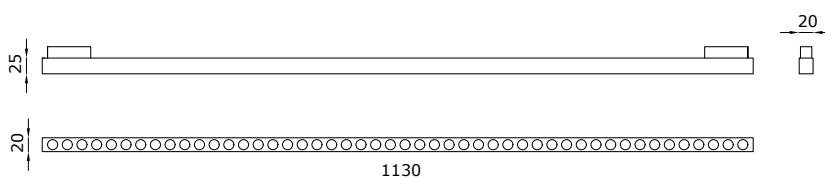

B

CODE COMPOSITION

T048 L 00012

0

dimmiability

ND non dimmable
DA DALI
11 1-10V

light colour

27 2700K
30 3000K
40 4000K

lens

20 20°
30 30°
42 26° x 42°

finishing

W1 white
B1 black

T048 L 00013

0

dimmiability

ND non dimmable
DA DALI

light colour

27 2700K
30 3000K
40 4000K

lens

20 20°
30 30°
42 26° x 42°

finishing

W1 white
B1 black

TECHNICAL FEATURES

Code	T048 L 00012 XX (fig.A)	T048 L 00013 XX (fig.B)
Type	LED module 	LED module 
Material	Aluminum	Aluminum
Finishing	White Black	White Black
Weight	0.4 Kg	0.8 Kg
Mounting	Track 48V	Track 48V
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED 	LED 
Lamp wattage	10W	18W
Luminous efficacy	1200 lm - 3000K	2100 lm - 3000K
Light distribution	Beam 20° Beam 30° 26° x 42° (on request)	Beam 20° Beam 30° 26° x 42° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<15 (lens 20°) <14 (lens 30°) <18 (lens 26° x 42°)	<15 (lens 20°) <14 (lens 30°) <18 (lens 26° x 42°)
Emergency	-	-
Energy efficiency class	A++	A++
Note	Suitable for B-INSIDE and B-55.	Suitable for B-INSIDE and B-55.


example of code composition

T048 L 00012 W1 20 27 ND 0

L1



pending

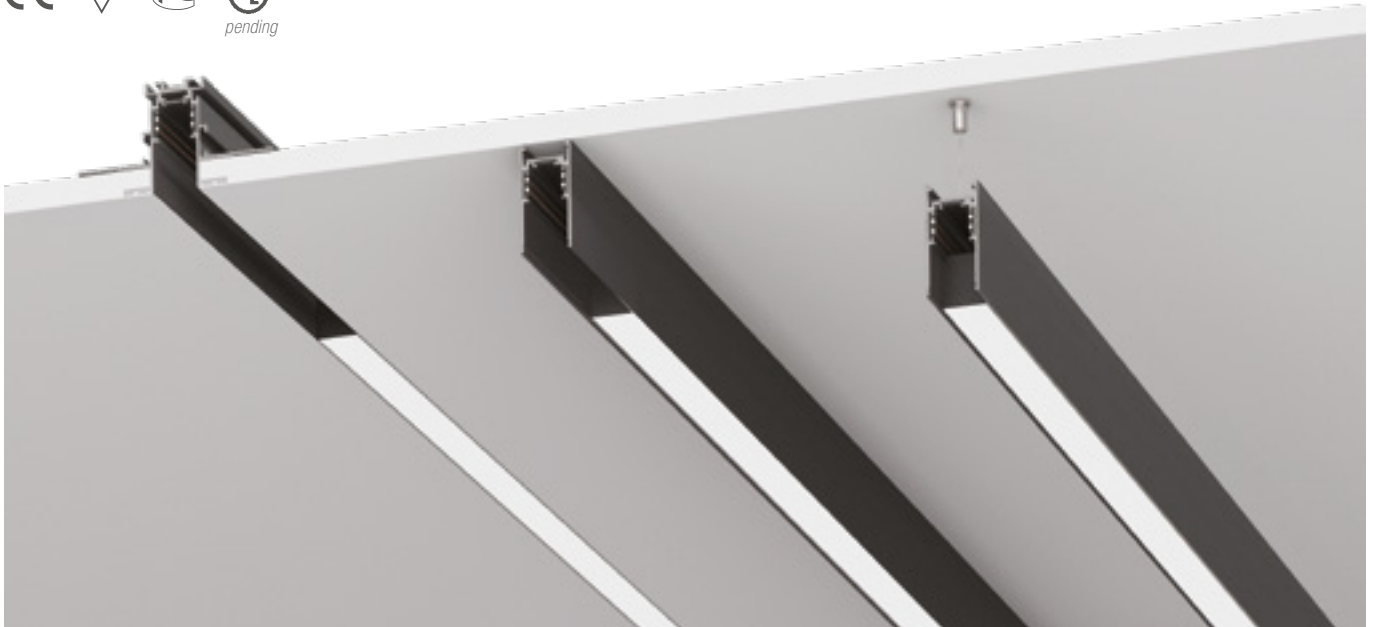

matt white painted





matt black painted

TOTALMENTE A SCOMPARSA NEI BINARI B-INSIDE E B55

L1 è un modulo LED lineare per ambienti interni, adatto per installazioni su binario 48V per la serie B-INSIDE e B55. È disponibile in due lunghezze (565 mm e 1130 mm) e in due finiture diverse (bianco e nero). L1 è composto da LED ad altissima efficienza e uno schermo opale di chiusura che permette una diffusione della luce uniforme nell'ambiente in cui viene installato.

TOTALLY RECESSED INTO THE B-INSIDE AND B55 TRACKS

L1 is a linear LED module for interiors, suitable to be installed on a 48V track for the B-INSIDE and B55 series. It is available in two lengths (565 mm and 1130 mm) and in two different finishes (black and white). L1 is composed of a high efficiency LED and an opal closure screen which diffuses an even light in the space where it is installed.

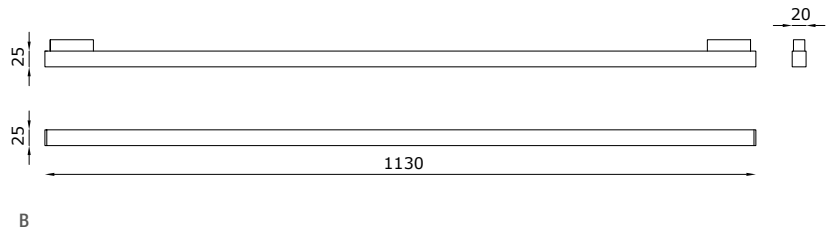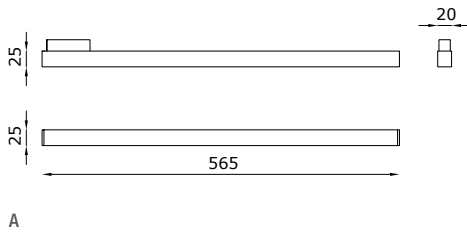

CODE COMPOSITION

T048 L 00014			00	0
<i>dimmiability</i>				
ND		non dimmable		
DA		DALI		
<i>light colour</i>				
27		2700K		
30		3000K		
40		4000K		
<i>finishing</i>				
W1		white		
B1		black		

T048 L 00015			00	0
<i>dimmiability</i>				
ND		non dimmable		
DA		DALI		
11		1-10V		
<i>light colour</i>				
27		2700K		
30		3000K		
40		4000K		
<i>finishing</i>				
W1		white		
B1		black		

example of code composition

T048 L 00014 **W1** 00 **27** **ND** 0


TECHNICAL FEATURES


Code	T048 L 00014 XX (fig.A)	T048 L 00015 XX (fig.B)
Type	LED module 	LED module 
Material	Aluminum	Aluminum
Finishing	White Black	White Black
Weight	0.4 Kg	0.8 Kg
Mounting	Track 48V	Track 48V
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver on board (included)
Lamp type	LED 	LED 
Lamp wattage	12W	24W
Luminous efficacy	1500 lm - 3000K	3000 lm - 3000K
Light distribution	Opal screen diffused	Opal screen diffused
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC	48 VDC
CRI	>90	>90
UGR	<29	<29
Emergency	-	-
Energy efficiency class	A++	A++
Note	Suitable for B-INSIDE and B-55.	Suitable for B-INSIDE and B-55.

56	B-INSIDE
62	B30
68	B55

48V

TRACKS

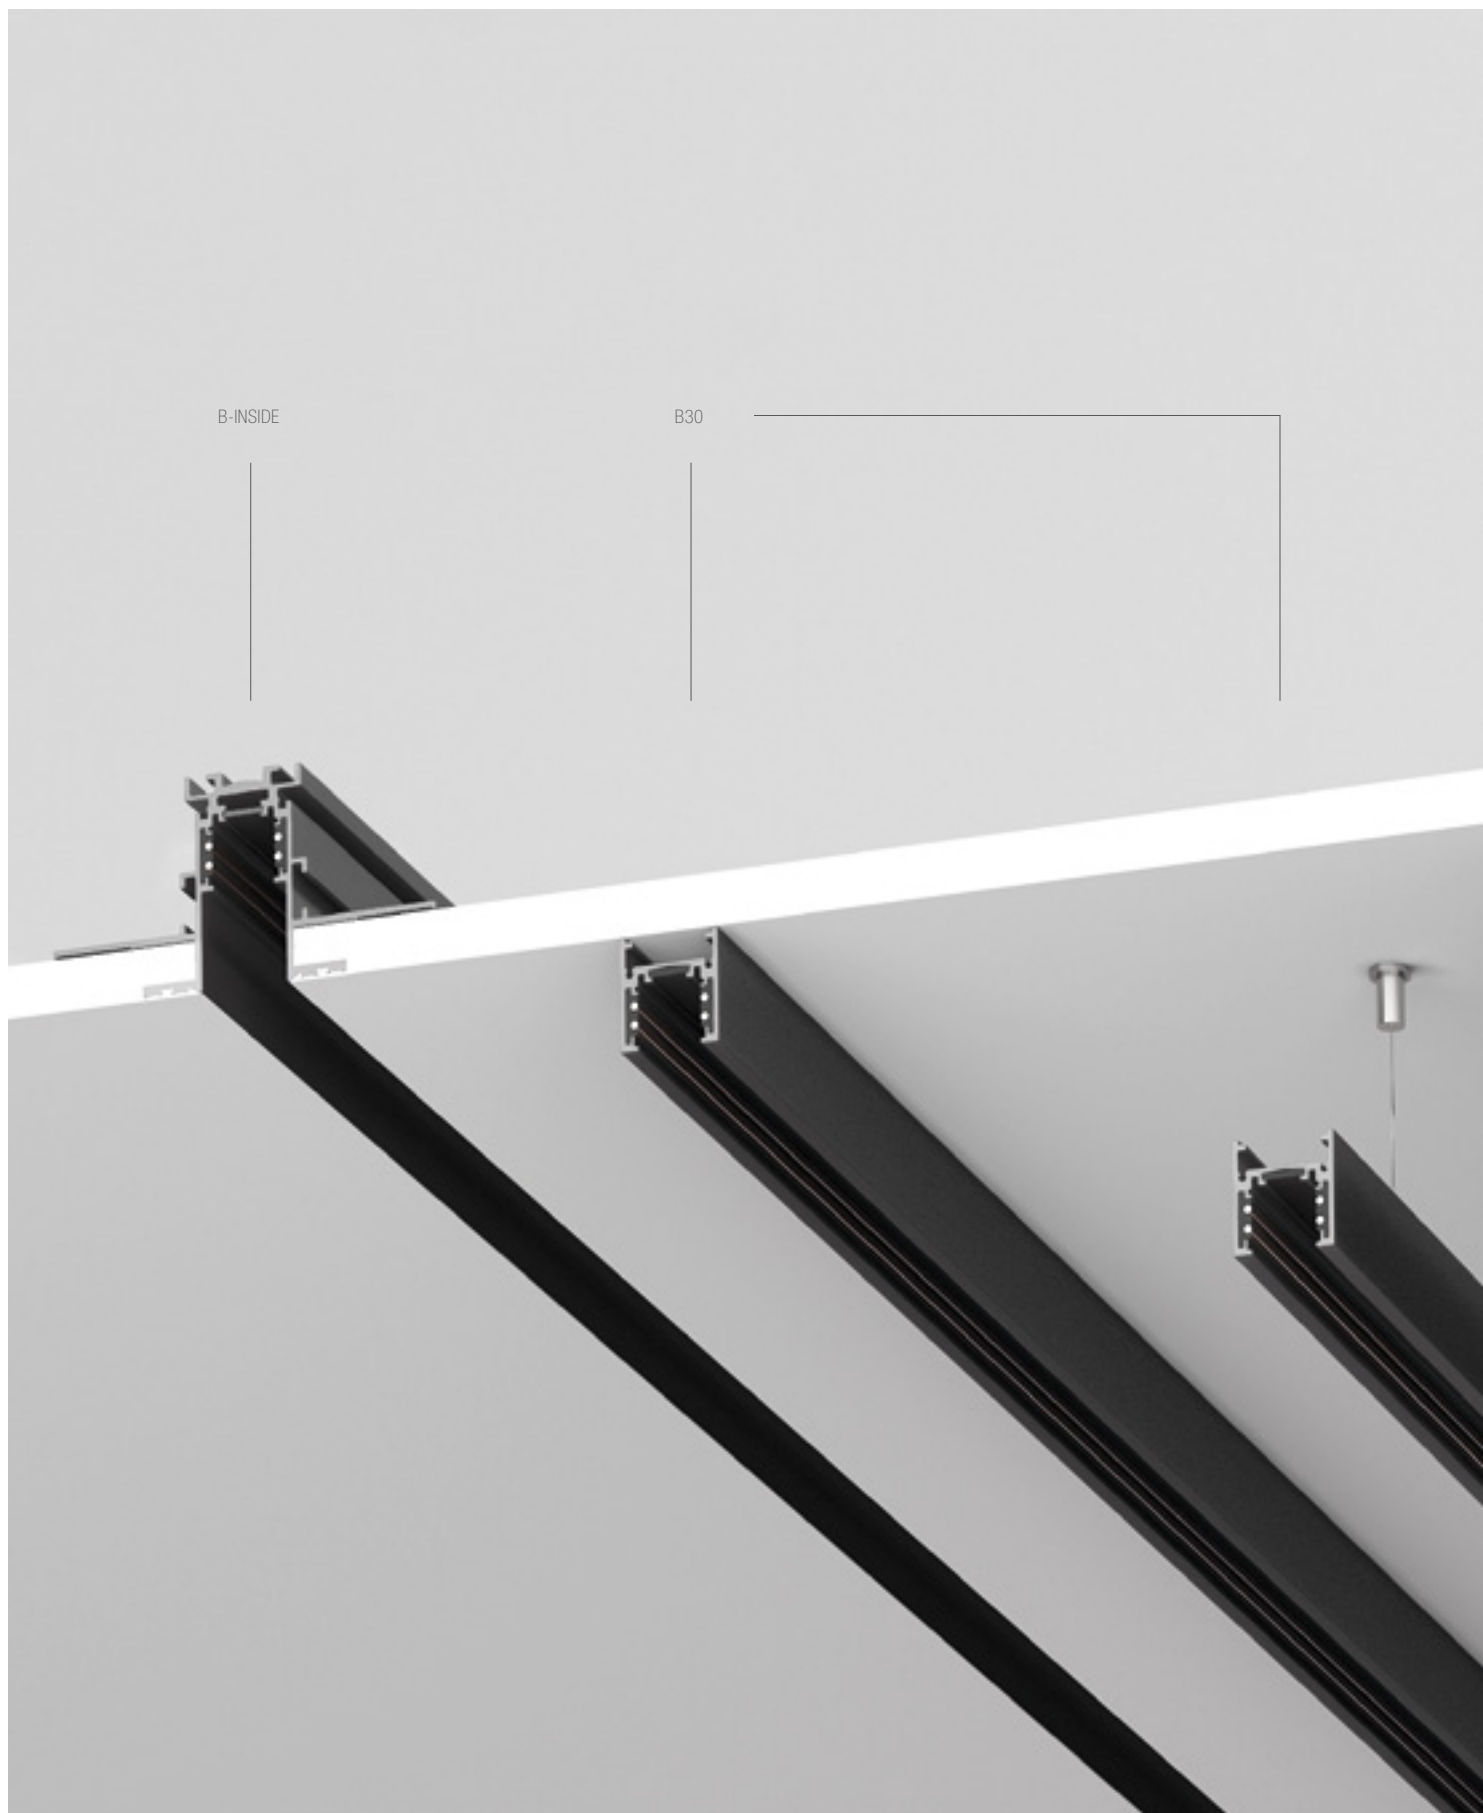

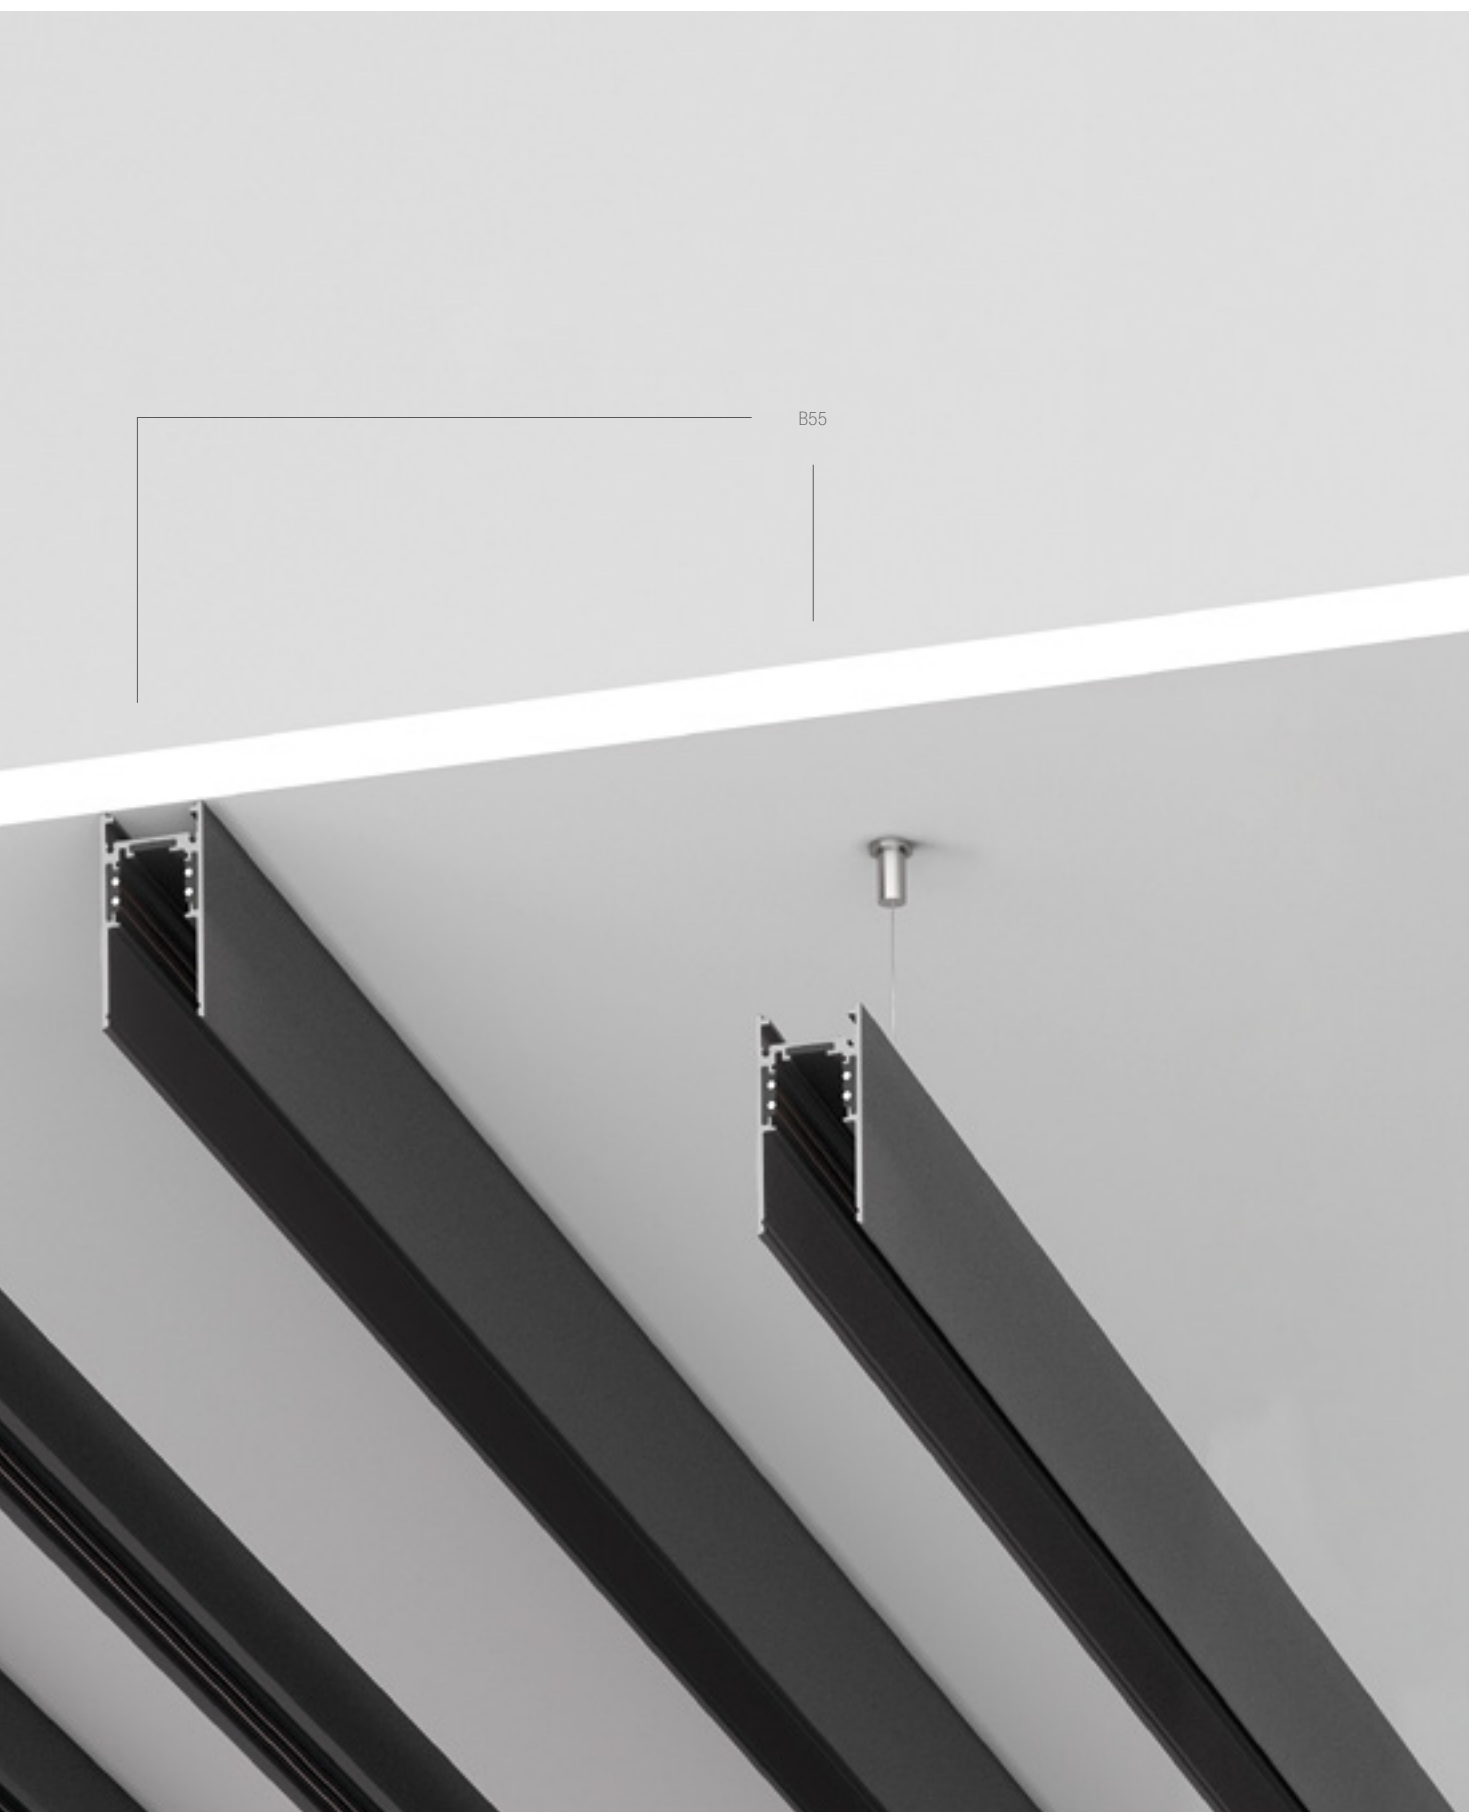

B-INSIDE




matt black RAL 9005 painted

LIGHT MODULES



C1
48



GL 48V
44



INCISO Q4 48V
38



L1
50



M1 48V
32



ML 48V
42



Q1 48V
34



Q4 48V
36



THE TUBE 48V
46



X1 48V
26



Y1 48V
28




Z1 48V
30

Sistema di illuminazione da interno per installazione a incasso. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio anodizzato nero e dotato di conduttori 48V.

B-INSIDE a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata.

A lighting system for interiors to be flush-mounted. The track and structures can be managed by remote DALI and 1-10V control systems. The profile has a length of between 1 m and 3 m, extruded in anodised black aluminium and fitted with 48V leads.

The 48V B-INSIDE is, in turn, completed with all the Buzzi & Buzzi products fitted with sockets with integrated electronics.

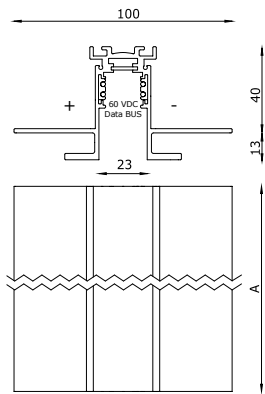

CODE COMPOSITION

T048 T 00 B1 0 1	
	<i>length</i>
01	1000 mm
02	2000 mm
03	3000 mm

example of code composition T048 T 00 B1 0 01 1

TECHNICAL FEATURES

Code	T048 T 00 XX
Type	Low voltage track
Material	Aluminum
Finishing	Black RAL 9005
Weight	-
Mounting	Recessed
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	57 mm x A
Voltage connection	48 VDC
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Note	The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners.

TESTATA DI ALIMENTAZIONE

POWER HEAD




CODE COMPOSITION

T048 A 00002 B1

TECHNICAL FEATURES

Code	T048 A 00002 B1
Type	Non-polarised power head
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	-



GIUNTO PASSANTE THROUGH JOINT




CODE COMPOSITION

T048 A 00004 B1

TECHNICAL FEATURES

Code	T048 A 00004 B1
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.



GIUNTO ANGOLARE A 90° 90° CORNER JOINT




CODE COMPOSITION

T048 A 00006 B1

TECHNICAL FEATURES

Code	T048 A 00006 B1
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE

FLEXIBLE JOINT




CODE COMPOSITION

T048 A 00008 B1

TECHNICAL FEATURES

Code	T048 A 00008 B1
Type	Flexible joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.

**TAPPO DI CHIUSURA**

CLOSURE PLUG




CODE COMPOSITION

T048 A 00012 B1

TECHNICAL FEATURES

Code	T048 A 00012 B1
Type	Closure plug
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	By screws (included)
Note	-

**TAPPO DI CHIUSURA FORATO**

HOLED CLOSURE PLUG




CODE COMPOSITION

T048 A 00016 B1

TECHNICAL FEATURES

Code	T048 A 00016 B1
Type	Holed closure plug with hole for cable passage
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	By screws (included)
Note	-



TRONCHESE

CUTTER




CODE COMPOSITION

TRK 00000 42

TECHNICAL FEATURES

Code	TRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used.

If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



STAFFA DI RINFORZO

REINFORCEMENT BRACKET




CODE COMPOSITION

T048 A 00023 B1

TECHNICAL FEATURES

Code	T048 A 00023 B1
Type	Reinforcement bracket
Material	Aluminum
Finishing	Black RAL 9005 
Fixing	By screws
Note	Reinforcement bracket used to give rigidity to the joint of the tracks and to prevent mechanical vibrations.

We recommend using three brackets at every track joint.

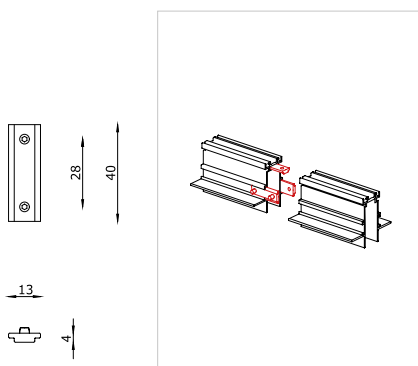

KIT SOSPENSIONE

SUSPENSION KIT




CODE COMPOSITION

T048 A 00025 00

TECHNICAL FEATURES

Code	T048 A 00025 00
Type	Suspension kit
Material	Steel
Finishing	-
Fixing	-
Note	The kit is to be used when the B-INSIDE track is fitted before installing the plaster panel. Kit composed of ceiling fixture bracket, M4 nut, threaded M6 bar 1000 mm long, suspension clip in steel with M6 screw coupling.

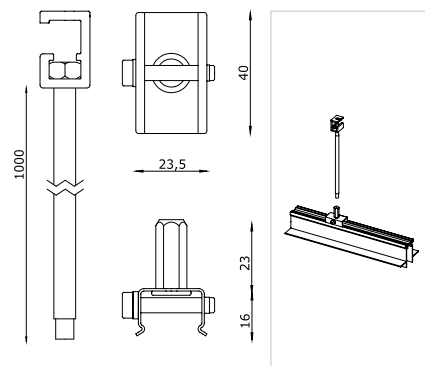

ALIMENTATORE

POWER SUPPLY




CODE COMPOSITION

T048 A 00060 00

TECHNICAL FEATURES

Code	T048 A 00060 00
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	240W max
Note	-



B30



matt white RAL 9016 painted




matt black RAL 9005 painted

LIGHT MODULES



C1
48



GL 48V
44



INCISO Q4 48V
38



L1
50



M1 48V
32



ML 48V
42



Q1 48V
34



Q4 48V
36



THE TUBE 48V
46



X1 48V
26




Y1 48V
28



Z1 48V
30

Sistema di illuminazione da interno, per installazione a sospensione e a superficie. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio con due finiture bianco e nero, è dotato di conduttori 48V. B30 a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata.

Lighting system for interiors, for pendant and surface installation. Track and structures can be managed by DALI and 1-10V remote control systems. The length of the profile is between 1 and 3 m, extruded in aluminium with two white and black finishes, it is fitted with 48V wires. The 48V B30 is in turn completed with all the Buzzi and Buzzi lighting products equipped with sockets with integrated electronics.

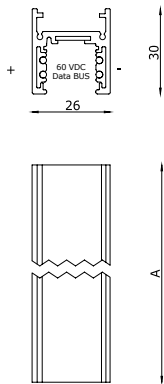

CODE COMPOSITION

T048 T 01 ₁ ₁	
<i>length</i>	
01	1000 mm
02	2000 mm
03	3000 mm
<i>finishing</i>	
W1	white RAL 9016
B1	black RAL 9005

example of code composition T048 T 01 **W1** 1 **01** 1

TECHNICAL FEATURES

Code	T048 T 01 XX
Type	Low voltage track
Material	Aluminum
Finishing	White RAL 9016 Black RAL 9005
Weight	-
Mounting	Surface Suspension
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	-
Voltage connection	48 VDC
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Note	B30 is a 48V powered electrical system and limited to a maximum current of 15 A. The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners. For ceiling or wall mounting, it's possible to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.

TESTATA DI ALIMENTAZIONE POWER HEAD



CODE COMPOSITION

T048 A 000_		
	finishing	
01 W1		white RAL 9016
02 B1		black RAL 9005

example of code composition
T048 A 00001 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised power head
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	-



GIUNTO PASSANTE THROUGH JOINT




CODE COMPOSITION

T048 A 000_		
	finishing	
03 W1		white RAL 9016
04 B1		black RAL 9005

example of code composition
T048 A 00003 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.



GIUNTO ANGOLARE A 90° 90° CORNER JOINT




CODE COMPOSITION

T048 A 000_		
	finishing	
05 W1		white RAL 9016
06 B1		black RAL 9005

example of code composition
T048 A 00005 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE

FLEXIBLE JOINT




CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
07 W1	white RAL 9016
08 B1	black RAL 9005

example of code composition
T048 A 000**07 W1**

TECHNICAL FEATURES

Code	T048 A XX
Type	Flexible joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



TAPPO DI CHIUSURA

CLOSURE PLUG




CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
09 W1	white RAL 9016
10 B1	black RAL 9005

example of code composition
T048 A 000**09 W1**


TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



TAPPO DI CHIUSURA FORATO

HOLED CLOSURE PLUG

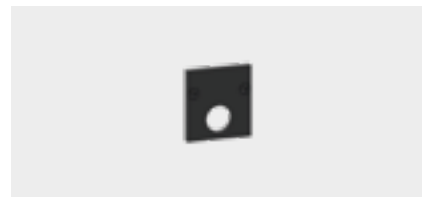


CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
13 W1	white RAL 9016
14 B1	black RAL 9005

example of code composition
T048 A 000**13 W1**

TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug with hole for cable passage
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



TRONCHESE
CUTTER




CODE COMPOSITION

TRK 00000 42

TECHNICAL FEATURES

Code	TRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



COVER PER GIUNTO A 90°
90° CORNER JOINT COVER




CODE COMPOSITION

T048 A 000	
	finishing
19 W1	white RAL 9016
20 B1	black RAL 9005
example of code composition	T048 A 00019 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	90° corner joint cover
Material	Aluminum body, steel bracket
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Note	The 90° corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.

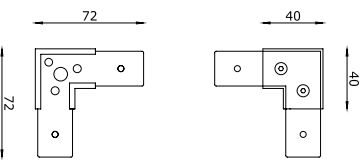

KIT SOSPENSIONE
E GIUNZIONE
SUSPENSION
AND JUNCTION KIT




CODE COMPOSITION

T048 A 00024 00

TECHNICAL FEATURES

Code	T048 A 00024 00
Type	Suspension and junction kit
Material	Steel
Finishing	-
Fixing	-
Note	Kit composed of metallic spherical rose, steel cable Ø 1.5 mm and automatic screw coupling attached to the bracket. Cable length 3 m (on request different lengths are available). Position the fixture kit with an inter-axis of 450 mm for a max capacity of 50 kg, or 900 mm for max 25 kg.

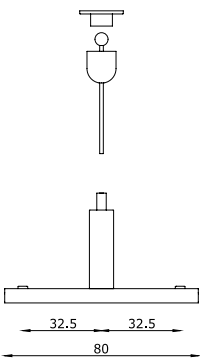

ALIMENTATORE
POWER SUPPLY




CODE COMPOSITION

T048 A 00060 00

TECHNICAL FEATURES

Code	T048 A 00060 00
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	240W max
Note	-



CASSETTA
PER ALIMENTATORE
SUPPLY BOX




CODE COMPOSITION

T048 A 000_	
	finishing
58 W1	white RAL 9016
59 B1	black RAL 9005
example of code composition	T048 A 000 58 W1

TECHNICAL FEATURES

Code	T048 A XX
Type	48V supply box
Material	Steel
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Insulation class	-
Voltage connection	-
Note	The purpose of the supply box attached to the surface is to house the driver in all those situations in which a remote driver cannot be used.



B55



matt white RAL 9016 painted




matt black RAL 9005 painted

LIGHT MODULES



C1
48



GL 48V
44



INCISO Q4 48V
38



L1
50



M1 48V
32



ML 48V
42



Q1 48V
34



Q4 48V
36



THE TUBE 48V
46



X1 48V
26




Y1 48V
28



Z1 48V
30

Sistema di illuminazione da interno, per installazione a sospensione e a superficie. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio con due finiture bianco e nero, è dotato di conduttori 48V. B55 a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata.

Lighting system for interiors, for pendant and surface installation. Track and structures can be managed by DALI and 1-10V remote control systems. The length of the profile is between 1 and 3 m, extruded in aluminium with two white and black finishes, it is fitted with 48V wires. The 48V B30 is in turn completed with all the Buzzi and Buzzi lighting products equipped with sockets with integrated electronics.



CODE COMPOSITION

T048 T 02	1	1		
			<i>length</i>	
			01	1000 mm
			02	2000 mm
			<i>finishing</i>	
			W1	white RAL 9016
			B1	black RAL 9005

example of code composition T048 T 02 W1 1 01 1

TECHNICAL FEATURES

Code	T048 T 02 XX
Type	Low voltage track
Material	Aluminum
Finishing	White RAL 9016 Black RAL 9005
Weight	-
Mounting	Surface Suspension
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	-
Voltage connection	48 VDC
Circuits	2 x ±15 A · 48 VDC 1 x ±15 A · 48 VDC + D+/D-
Note	B55 is a 48V powered electrical system and limited to a maximum current of 15 A. The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners. For ceiling or wall mounting, it's possible to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.

TESTATA DI ALIMENTAZIONE

POWER HEAD



CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
01 W1	white RAL 9016
02 B1	black RAL 9005

example of code composition
T048 A 000**01 W1**

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised power head
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	-



GIUNTO PASSANTE

THROUGH JOINT




CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
03 W1	white RAL 9016
04 B1	black RAL 9005

example of code composition
T048 A 000**03 W1**

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.



GIUNTO ANGOLARE A 90°

90° CORNER JOINT




CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
05 W1	white RAL 9016
06 B1	black RAL 9005

example of code composition
T048 A 000**05 W1**

TECHNICAL FEATURES

Code	T048 A XX
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE

FLEXIBLE JOINT




CODE COMPOSITION

T048 A 000_		
	<i>finishing</i>	
07 W1		white RAL 9016
08 B1		black RAL 9005
example of code composition	T048 A 000 07 W1	

TECHNICAL FEATURES

Code	T048 A XX
Type	Flexible joint
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	15 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



TAPPO DI CHIUSURA

CLOSURE PLUG




CODE COMPOSITION

T048 A 000_		
	<i>finishing</i>	
11 W1		white RAL 9016
12 B1		black RAL 9005
example of code composition	T048 A 000 11 W1	


TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



TAPPO DI CHIUSURA FORATO

HOLED CLOSURE PLUG

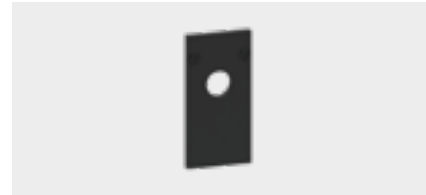


CODE COMPOSITION

T048 A 000_		
	<i>finishing</i>	
15 W1		white RAL 9016
16 B1		black RAL 9005
example of code composition	T048 A 000 15 W1	

TECHNICAL FEATURES

Code	T048 A XX
Type	Closure plug with hole for cable passage
Material	Polycarbonate
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws (included)
Note	-



COVER DI CHIUSURA
CLOSING COVER




CODE COMPOSITION

T048 A 000_ B1	
	<i>length</i>
56	1000 mm
57	2000 mm
18	3000 mm
example of code composition T048 A 000 18 B1	

TECHNICAL FEATURES

Code	T048 A XX	
Type	Aesthetic closing cover	
Material	PMMA	
Finishing	Black RAL 9005	
Fixing	-	
Note	Cover installable at the bottom between the various spotlights, to hide the inside of the track and to allow aesthetic continuity.	

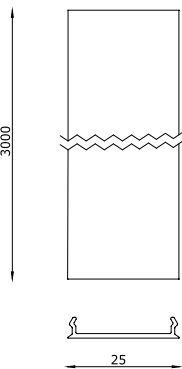

TRONCHESE
CUTTER




CODE COMPOSITION

TRK 00000 42	

TECHNICAL FEATURES

Code	TRK 00000 42	
Type	Conductor cutting pliers	
Material	-	
Finishing	-	
Fixing	-	
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.	



COVER PER GIUNTO A 90°
90° CORNER JOINT COVER




CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
21 W1	white RAL 9016
22 B1	black RAL 9005
example of code composition T048 A 000 21 W1	

TECHNICAL FEATURES

Code	T048 A XX	
Type	90° corner joint cover	
Material	Aluminum body, steel bracket	
Finishing	White RAL 9016	
	Black RAL 9005	
Fixing	By screws	
Note	The 90° corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.	

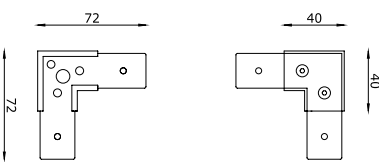

KIT SOSPENSIONE E GIUNZIONE

SUSPENSION
AND JUNCTION KIT




CODE COMPOSITION

T048 A 00024 00

TECHNICAL FEATURES

Code	T048 A 00024 00
Type	Suspension and junction kit
Material	Steel
Finishing	-
Fixing	-
Note	Kit composed of metallic spherical rose, steel cable Ø 1.5 mm and automatic screw coupling attached to the bracket. Cable length 3 m (on request different lengths are available). Position the fixture kit with an inter-axis of 450 mm for a max capacity of 50 kg, or 900 mm for max 25 kg.

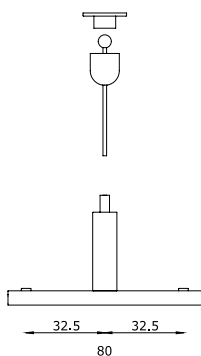

ALIMENTATORE

POWER SUPPLY




CODE COMPOSITION

T048 A 00060 00

TECHNICAL FEATURES

Code	T048 A 00060 00
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	240W max
Note	-



CASSETTA PER ALIMENTATORE

SUPPLY BOX




CODE COMPOSITION


T048 A 000_	
	finishing
58 W1	white RAL 9016
59 B1	black RAL 9005

example of code composition T048 A 000**58 W1**


TECHNICAL FEATURES

Code	T048 A XX
Type	48V supply box
Material	Steel
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Insulation class	-
Voltage connection	-
Note	The purpose of the supply box attached to the surface is to house the driver in all those situations in which a remote driver cannot be used.



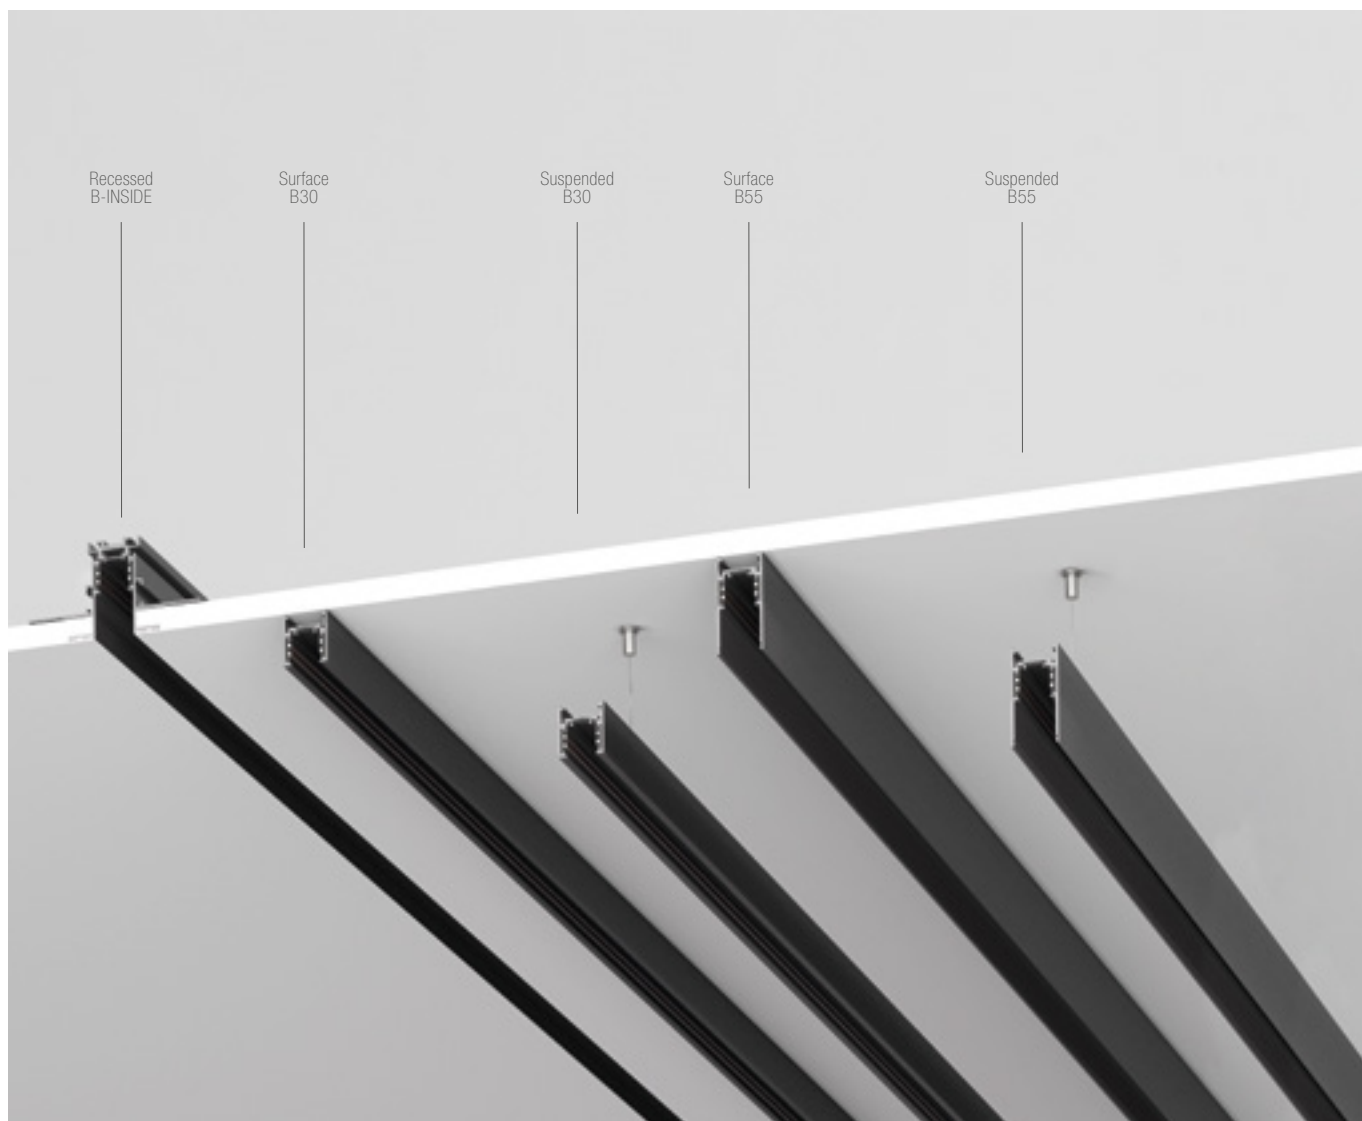

EXAMPLE OF INSTALLATION

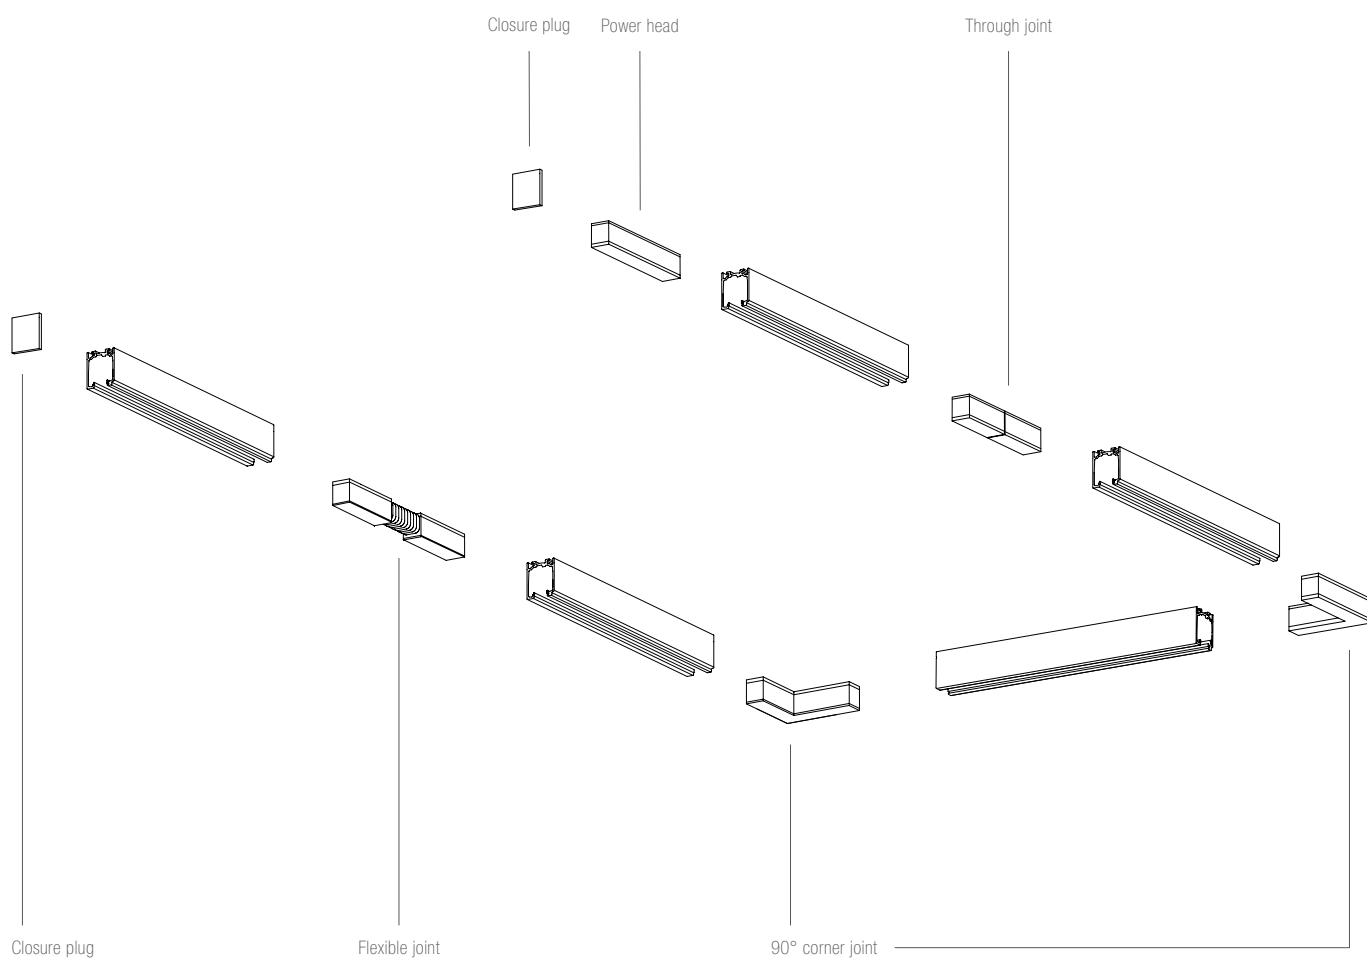


78	X1 NANO 48V
80	Z1 NANO 48V

48V Nano tracks

LIGHT MODULES

X1 NANO 48V

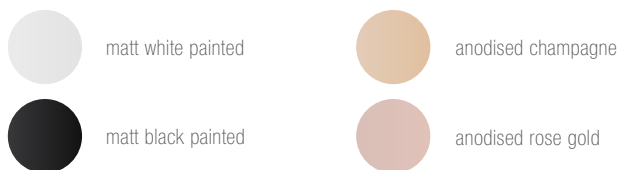


X1 NANO 48V è un apparecchio illuminante da interni per binario 48V N-INSIDE e N10, disponibile con finitura bianca, nera, anodizzata champagne o rose gold e lenti intercambiabili. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°.

Una luce che valorizza spazi e ambienti con eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Il proiettore X1 NANO 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del binario.

X1 NANO 48V is a 48V N-INSIDE and N10 track luminaire, available in black, white, anodised champagne or rose gold finishes and interchangeable lenses. Characterised by a high performance projector, with a minimal design to give minimum visual impact, it is fitted with an adjustable arm which can be tilted over a vertical axis of 360° and a horizontal axis of 90°.

A light which enhances spaces and environments with elegance, making every individual detail the protagonist of the interior of the design space. The X1 NANO 48V projector has a LED (COB) CRI >90, 3000K light source (2700K/4000K on request) fed by direct current with recessed converter installed inside the track's adaptor.



CODE COMPOSITION

T048 L 00017		0	
		<i>dimmiability</i>	
ND	non dimmable		
DA	DALI		
11	1-10V		
		<i>light colour</i>	
27	2700K		
30	3000K		
40	4000K		
		<i>lens</i>	
22	22°		
50	50°		
		<i>finishing</i>	
W1	white		
B1	black		
A1	champagne		
A2	rose gold		

example of code composition

T048 L 00017 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00017 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Nano track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	Black tige for X1 NANO 48V anodised champagne and anodised rose gold.

Z1 NANO 48V




matt white painted



matt black painted

Z1 NANO 48V è un apparecchio per binari a 48V N-INSIDE e N10, caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale. Disponibile con finitura di serie bianca o nera, Z1 NANO 48V è un prodotto che garantisce alte prestazioni con il minimo impatto visivo. Il proiettore Z1 NANO 48V ha sorgente luminosa a LED (COB) CRI >90, 3000K (2700K/4000K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore a binario.

Z1 NANO 48V is a 48V N-INSIDE and N10 track luminaire, characterised by a miniaturised projector with a diameter of only 23 mm., completely adjustable over vertical and horizontal axes. Available with a standard black or white finish, Z1 NANO 48V is a product which guarantees high performances with minimum visual impact. The Z1 NANO 48V projector has a LED (COB) CRI >90, 3000K light source (2700K/4000K on request) fed by direct current with recessed converter installed inside the track adapter.



CODE COMPOSITION

T048 L 00018		0	
		<i>dimmiability</i>	
		ND	non dimmable
		DA	DALI
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>lens</i>	
		22	22°
		50	50°
		<i>finishing</i>	
		W1	white
		B1	black

example of code composition

T048 L 00018 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T048 L 00018 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.4 Kg
Mounting	Nano track 48V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	48 VDC
CRI	>90
Energy efficiency class	A++
Note	-

86	N-INSIDE
92	N10

48V Nano tracks

TRACKS


DIMENSIONI EFFETTIVE DI SOLI 10 X 10 MM

REAL DIMENSIONS JUST 10 MM

N-INSIDE

N10



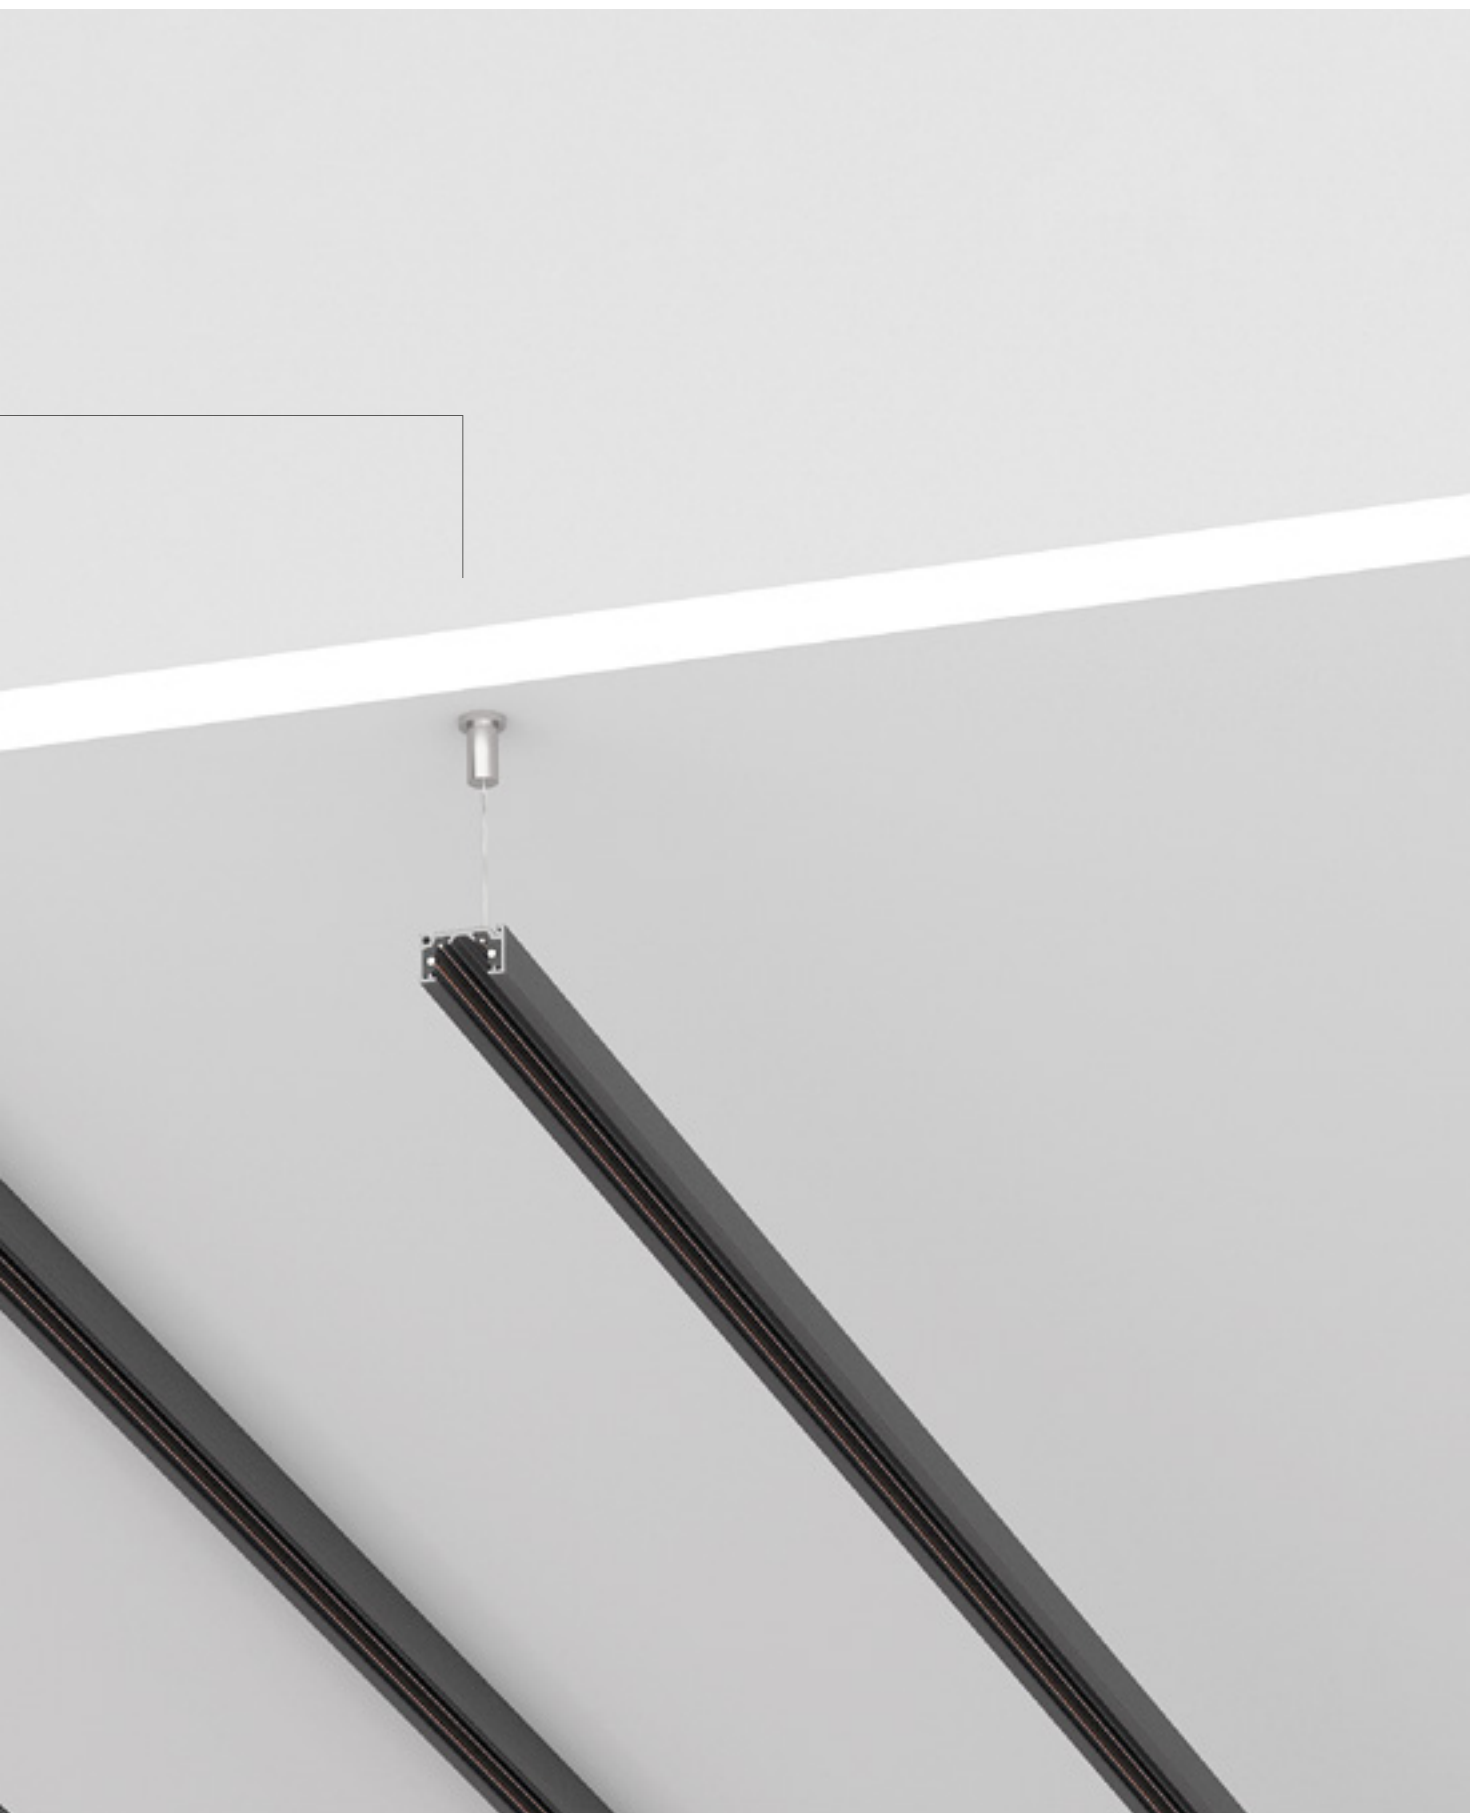

N-INSIDE



black anodised

LIGHT MODULES



X1 NANO 48V
78



Z1 NANO 48V
80

Sistema di illuminazione da interno per installazione a incasso. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V.


Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio anodizzato nero e dotato di conduttori 48V.

N-INSIDE a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata.

A lighting system for interiors for recessed installation. The track and structures can be managed by remote DALI and 1-10V systems.

The profile is between 1 m and 3 m long, extruded in anodised black aluminium and fitted with 48V leads.

In turn, the 48V N-INSIDE is completed with all the Buzzi & Buzzi lighting products fitted with connections with integrated electronics.



CODE COMPOSITION

T048 T 05 B1 0 _ 1		
	<i>length</i>	
	01	1000 mm
	02	2000 mm
	03	3000 mm

example of code composition T048 T 05 B1 0 **01** 1

TECHNICAL FEATURES

Code	T048 T 05 XX
Type	Low voltage track
Material	Aluminum
Finishing	Black
Weight	-
Mounting	Recessed
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	21 mm x A
Voltage connection	48 VDC
Circuits	2 x ±10 A · 48 VDC 1 x ±10 A · 48 VDC + D+/D-
Note	The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners.

TESTATA DI ALIMENTAZIONE

POWER HEAD




CODE COMPOSITION

T048 A 00061 B1

TECHNICAL FEATURES

Code	T048 A 00061 B1
Type	Non-polarised power head
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	-

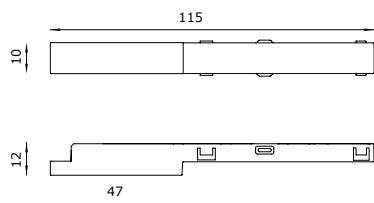

GIUNTO PASSANTE

THROUGH JOINT




CODE COMPOSITION

T048 A 00064 B1

TECHNICAL FEATURES

Code	T048 A 00064 B1
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.

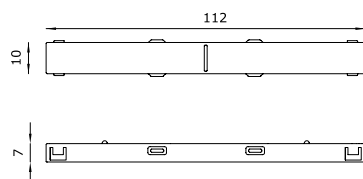

GIUNTO ANGOLARE A 90°

90° CORNER JOINT




CODE COMPOSITION

T048 A 00065 B1

TECHNICAL FEATURES

Code	T048 A 00065 B1
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.

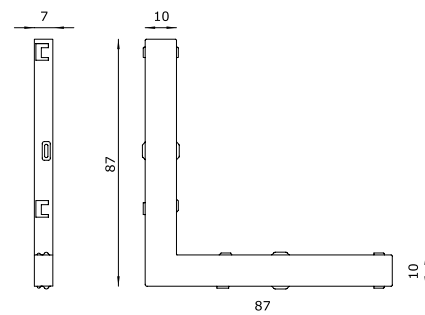

GIUNTO ANGOLARE A 90° SOFFITTO-PARETE

CEILING-WALL
90° CORNER JOINT




CODE COMPOSITION

T048 A 00066 B1

TECHNICAL FEATURES

Code	T048 A 00066 B1	
Type	Non-polarised 90° ceiling-wall corner joint	
Material	Polycarbonate	
Finishing	Black RAL 9005	
Fixing	Plug-in	
Insulation class	III	
Voltage connection	10 A max · 48 VDC	
Note	Non-polarized angle for ceiling-to-wall connection, used to connect two tracks joined to 90°. Light points cannot be installed in the corners.	

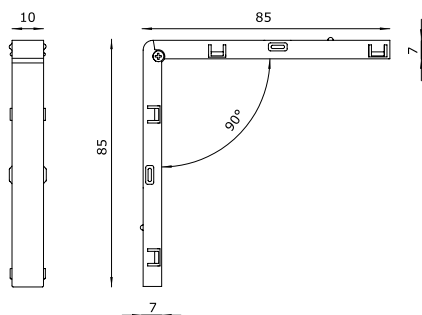

GIUNTO FLESSIBILE

FLEXIBLE JOINT




CODE COMPOSITION

T048 A 00067 B1

TECHNICAL FEATURES

Code	T048 A 00067 B1	
Type	Flexible joint	
Material	Polycarbonate	
Finishing	Black RAL 9005	
Fixing	Plug-in	
Insulation class	III	
Voltage connection	10 A max · 48 VDC	
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.	



TAPPO DI CHIUSURA

CLOSURE PLUG




CODE COMPOSITION

T048 A 00063 B1

TECHNICAL FEATURES

Code	T048 A 00063 B1	
Type	Closure plug	
Material	Polycarbonate	
Finishing	Black RAL 9005	
Fixing	By screws (included)	
Note	-	



TRONCHESE CUTTER




CODE COMPOSITION

TRK 00001 69

TECHNICAL FEATURES

Code	TRK 00001 69
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long nano tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



ALIMENTATORE POWER SUPPLY




CODE COMPOSITION

T048 A 00060 00

TECHNICAL FEATURES

Code	T048 A 00060 00
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	240W max
Note	-



N10



matt black RAL 9005 painted

LIGHT MODULES




X1 NANO 48V
78



Z1 NANO 48V
80

Sistema di illuminazione da interno, per installazione a sospensione e a superficie. Binario e corpi sono gestibili con sistemi di controllo remoto DALI e 1-10V. Il profilo ha lunghezza compresa fra 1 m e 3 m, estruso in alluminio e dotato di conduttori 48V. N10 a 48V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di attacchi con un'elettronica integrata.

Lighting system for interiors, for pendant and surface installation. Track and structures can be managed by remote DALI and 1-10V control systems. The profile is between 1m and 3 m long, extruded in aluminium. It is fitted with 48V leads. In turn, the 48V N10 is completed with all the Buzzi & Buzzi lighting products fitted with connections with integrated electronics.



CODE COMPOSITION

T048 T 04 B1 1 1		
	<i>length</i>	
	01	1000 mm
	02	2000 mm
example of code composition	03	3000 mm
	T048 T 04 B1 1 01 1	

TECHNICAL FEATURES

Code	T048 T 04 XX
Type	Low voltage track
Material	Aluminum
Finishing	Black RAL 9005
Weight	-
Mounting	Surface I Suspension
IP rating	-
Insulation class	III
Control gear	Remote power supply (not included)
Dimensions	A: 1000 mm I 2000 mm I 3000 mm
Cut out for plasterboard	-
Voltage connection	48 VDC
Circuits	2 x ±10 A · 48 VDC 1 x ±10 A · 48 VDC + D+/D
Note	The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners.

TESTATA DI ALIMENTAZIONE POWER HEAD




CODE COMPOSITION

T048 A 00061 B1

TECHNICAL FEATURES

Code	T048 A 00061 B1
Type	Non-polarised power head
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	-

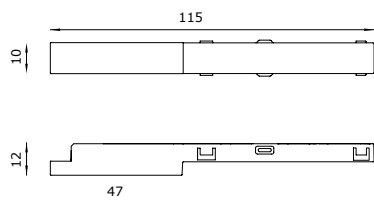

GIUNTO PASSANTE THROUGH JOINT




CODE COMPOSITION

T048 A 00064 B1

TECHNICAL FEATURES

Code	T048 A 00064 B1
Type	Non-polarised through joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks and to guarantee the supply of current.

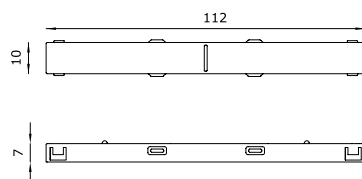

GIUNTO ANGOLARE A 90° 90° CORNER JOINT




CODE COMPOSITION

T048 A 00065 B1

TECHNICAL FEATURES

Code	T048 A 00065 B1
Type	Non-polarised 90° corner joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks joined at 90° and to guarantee that current reaches the corners. Light points cannot be installed in the corners.

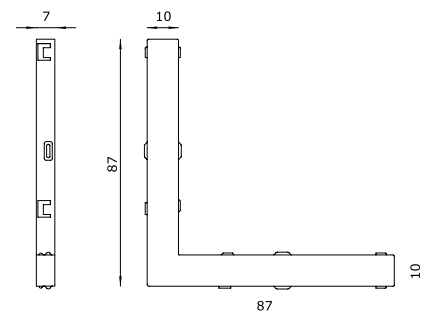

GIUNTO ANGOLARE A 90° SOFFITTO-PARETE

CEILING-WALL
90° CORNER JOINT




CODE COMPOSITION

T048 A 00066 B1

TECHNICAL FEATURES

Code	T048 A 00066 B1
Type	Non-polarised 90° ceiling-wall corner joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Non-polarized angle for ceiling-to-wall connection, used to connect two tracks joined to 90°. Light points cannot be installed in the corners.

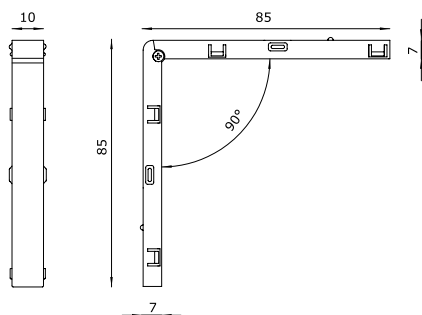

GIUNTO FLESSIBILE

FLEXIBLE JOINT




CODE COMPOSITION

T048 A 00067 B1

TECHNICAL FEATURES

Code	T048 A 00067 B1
Type	Flexible joint
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	Plug-in
Insulation class	III
Voltage connection	10 A max · 48 VDC
Note	Used to connect two tracks installed on different surfaces (ceiling-wall) or to create different angles from 90° and to guarantee power supply. Light points cannot be installed in the corners.



TAPPO DI CHIUSURA

CLOSURE PLUG




CODE COMPOSITION

T048 A 00062 B1

TECHNICAL FEATURES

Code	T048 A 00062 B1
Type	Closure plug
Material	Polycarbonate
Finishing	Black RAL 9005 
Fixing	By screws (included)
Note	-



TRONCHESE

CUTTER




CODE COMPOSITION

TRK 00001 69

TECHNICAL FEATURES

Code	TRK 00001 69
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long nano tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



GIUNTO ANGOLARE ORIZZONTALE

HORIZONTAL CORNER JOINT




CODE COMPOSITION

T048 A 00068 B1


TECHNICAL FEATURES

Code	T048 A 00068 B1
Type	90° horizontal corner joint cover
Material	Aluminum body, steel bracket
Finishing	Black RAL 9005 
Fixing	By screws
Note	The 90° horizontal corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.



GIUNTO ANGOLARE VERTICALE

VERTICAL CORNER JOINT

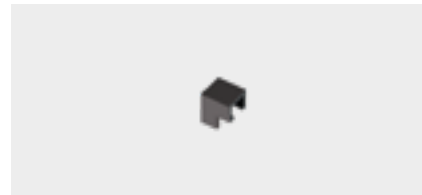


CODE COMPOSITION

T048 A 00069 B1

TECHNICAL FEATURES

Code	T048 A 00069 B1
Type	90° vertical corner joint cover
Material	Aluminum body, steel bracket
Finishing	Black RAL 9005 
Fixing	By screws
Note	The 90° vertical corner joint allows the mechanical connection of the tracks, forming a 90° angle, without cutting them at 45°.



KIT SOSPENSIONE E GIUNZIONE

SUSPENSION
AND JUNCTION KIT




CODE COMPOSITION

T048 A 00070 B1

TECHNICAL FEATURES

Code	T048 A 00070 B1
Type	Suspension and junction kit
Material	Steel
Finishing	-
Fixing	-
Note	Kit composed of metallic spherical rose, steel cable and automatic screw coupling attached to the bracket.

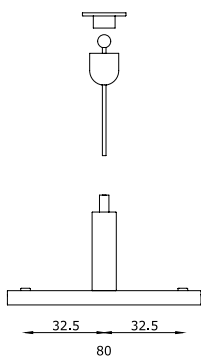

ALIMENTATORE

POWER SUPPLY




CODE COMPOSITION

T048 A 00060 00

TECHNICAL FEATURES

Code	T048 A 00060 00
Type	Constant voltage driver
Material	-
Finishing	-
Fixing	-
Insulation class	-
Voltage connection	220-240V · 50/60Hz · 48 VDC
Max wattage	240W max
Note	-



CASSETTA PER ALIMENTATORE

SUPPLY BOX




CODE COMPOSITION

T048 A 000_	
	<i>finishing</i>
58 W1	white RAL 9016
59 B1	black RAL 9005


example of code composition
T048 A 00058 W1

TECHNICAL FEATURES


Code	T048 A XX
Type	48V supply box
Material	Steel
Finishing	White RAL 9016  Black RAL 9005 
Fixing	By screws
Insulation class	-
Voltage connection	-
Note	The purpose of the supply box attached to the surface is to house the driver in all those situations in which a remote driver cannot be used.




Power head




Flexible joint




Ceiling-wall 90° corner joint




Closure plug







Power head



Through joint



90° corner joint



104	X1 220V
106	Y1 220V
110	Z1 220V
114	M1 220V
118	Q1 220V
122	Q2 220V
126	Q3 220V
130	Q4 220V
132	Inciso Q4 220V
136	ML 220V
138	GL 220V

220V

LIGHT MODULES

X1 220V



matt white painted



anodised champagne




matt black painted



anodised rose gold

X1 220V è un apparecchio illuminante da interni, disponibile con finitura bianca, nera, anodizzata champagne o rose gold e lenti intercambiabili, adatto per installazione su binario 220V. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360° e orizzontale di 90°: una luce puntuale che sa valorizzare spazi e ambienti con discrezione, linearità ed eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Un prodotto che fa della resistenza e della precisione le sue carte vincenti.

X1 220V is an indoor luminaire installable on 220V rail. It is available with white, black, champagne or rose gold finishings and interchangeable lens. Characterized by a high-performance projector realized with an essential design to obtain a minimal visual impact, it is provided by an adjustable arm which can be inclined up to 360° vertically and 90° horizontally: a punctual light able to valorize space and environment in a subtle, uniform and elegant way, making every single detail the absolute protagonist of the architectonic project. A product which is by far the best choice in fact of resistance and precision.



CODE COMPOSITION

T220 L 00001

0	
<i>dimmiability</i>	
ND	non dimmable
DA	DALI
<i>light colour</i>	
27	2700K
30	3000K
40	4000K
<i>lens</i>	
22	22°
50	50°
<i>finishing</i>	
W1	white
B1	black
A1	champagne
A2	rose gold

example of code composition

T220 L 00001 W1 22 27 ND 0

TECHNICAL FEATURES

Code	T220 L 00001 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

Black tige for X1 220V anodised champagne and anodised rose gold.

Y1 220V



matt white painted



chromed



matt black painted




anodised brass

Y1 220V è un proiettore cilindrico per ambienti interni, adatto per installazioni su binario 220V, con dimensioni molto ridotte per un minimo impatto visivo della sorgente. Ha finitura di serie bianca, nera opaca, cromo o brass e lenti intercambiabili.

Y1 220V è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con precisione ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.

Y1 220V is a cylindrical projector for indoor environments, suitable for 220V rail installations, with small dimensions for minimum visual impact of the light source. It is produced with a white, opaque black chromed or brass finishings with interchangeable lens.

Y1 220V is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with precision and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.



CODE COMPOSITION

T220 L 00002		0	
		<i>dimmiability</i>	
		ND	non dimmable
		DA	DALI
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>lens</i>	
		22	22°
		50	50°
		<i>finishing</i>	
		W1	white
		B1	black
		CP	chromed
		BR	brass

example of code composition

T220 L 00002 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T220 L 00002 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass
Weight	0.4 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 8W
Luminous efficacy	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track. Black tige for Y1 220V chromed and anodised brass.



Y1 220V
SUPERFUTUREDESIGN*



Z1 220V




matt white painted



matt black painted

Z1 220V è un apparecchio per ambienti interni, adatto per installazioni su binario 220V e caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale. Finiture disponibili bianca o nera per Z1 220V, un prodotto che garantisce alte prestazioni con il minimo impatto visivo grazie ai suoi snodi invisibili.

Z1 220V is a light fitting for interiors suitable for installations on 220V track and characterised by a miniaturised projector with a diameter of only 23 mm, completely directional on its vertical and horizontal axes. Finishes available in white or black for Z1 220V, a product which guarantees high performances with minimum visual impact thanks to its invisible joints.



CODE COMPOSITION

T220 L 00003		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
22	22°	
50	50°	
		<i>finishing</i>
W1	white	
B1	black	

example of code composition

T220 L 00003 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T220 L 00003 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.4 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.



Z1 220V
SUPERFUTUREDESIGN*



M1 220V




matt white painted



matt black painted

M1 220V è una sospensione per interni, installabile su binario 220V: è composta da un'asta che conduce la luce in modo diretto e puntuale, e un proiettore completamente direzionabile a 360°, che permette di dirigere la luce verso singoli dettagli dello spazio. Una sospensione dal design minimale con luce spot, disponibile con ottiche differenti.

M1 220V is a suspended indoor luminaire installable on 220V rail: it is composed by a pole which scatters light in a direct and punctual manner. It is also provided by a projector adjustable up to 360°, which allows to redirect the luminescent beam towards the single details within the space. A suspended lamp of minimal design and emanating a spot light, available with different lens.

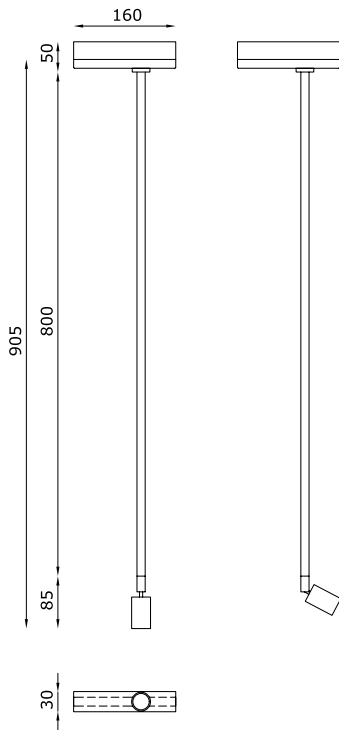

CODE COMPOSITION

T220 L 00004		0
	<i>dimmiability</i>	
ND	non dimmable	
DA	DALI	
	<i>light colour</i>	
27	2700K	
30	3000K	
40	4000K	
	<i>lens</i>	
22	22°	
50	50°	
	<i>finishing</i>	
W1	white	
B1	black	

example of
code composition

T220 L 00004 **W1 22 27 ND 0**

TECHNICAL FEATURES

Code	T220 L 00004 XX
Type	Projector $\pm 360^\circ / \pm 90^\circ$
Material	Aluminum
Finishing	White I Black
Weight	0.75 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.






Q1 220V



Proiettore ad alte performance in metallo verniciato a polvere: Q1 220V è un apparecchio per interni adatto per installazione su binario 220V. Garantisce il minimo impatto visivo, è completamente orientabile a 360° e disponibile in più varianti ottiche.

A high-performance, metallic dust-painted projector: Q1 220V is an indoor luminaire installable on 220V rail.

It guarantees a minimal visual impact and is completely orientable up to 360° and also available with different lens.



CODE COMPOSITION

T220 L 00005		0	
		<i>dimmiability</i>	
		ND	non dimmable
		DA	DALI
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>lens</i>	
		12	12°
		24	24°
		38	38°
		<i>finishing</i>	
		W1	white
		B1	black

example of code composition

T220 L 00005 **W1 12 27 ND 0**

TECHNICAL FEATURES

Code	T220 L 00005 XX
Type	Projector $\pm 360^\circ$ / $\pm 90^\circ$
Material	Aluminum
Finishing	White Black
Weight	0.8 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 12W
Luminous efficacy	1550 lm - 3000K
Light distribution	Beam 24° Beam 12° 38° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.



Q1 220V
Showroom - Ciarmoli Queda Studio - London




Q1 220V
Showroom - Ciarmoli Queda Studio - London

Q2 220V



Proiettore professionale da binario 220V in alluminio verniciato a polvere: Q2 220V è adatto per installazioni in ambienti interni dotato di sistema con braccio a scomparsa nel corpo e completamente direzionabile. Disponibile in differenti ottiche, intercambiabili senza utilizzo di alcun utensile, combinando al massimo funzionalità e design. Un perfetto design dove l'alimentatore è occultato nel corpo del faretto.

A professional projector in aluminium installable on 220V rail and dust painted: Q2 220V is ideal to be placed in indoor environments. It has a disappearing, adjustable arm which can be hidden within the body. The different and interchangeable lens, which can be easily replaced without any specific items, best combine functionality and design. A perfect design in which the driver remains hidden in the body of the spotlight.



CODE COMPOSITION

T220 L 00006		ND 0
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
15	15°	
30	30°	
50	50°	
		<i>finishing</i>
W1	white	
B1	black	

example of code composition T220 L 00006 **W1 15 27** ND 0

TECHNICAL FEATURES

Code	T220 L 00006 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.5 Kg
Mounting	Track 220V
IP rating	IP20
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 15W
Luminous efficacy	1400 lm - 3000K
Light distribution	Beam 30° Beam 15° 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

Q2 220V

Residence Oberndorf bei - Lutena - Salzburg





Q3 220V




matt white painted



matt black painted

Massime performance luminose per un proiettore professionale da binario 220V in alluminio verniciato a polvere pensato per avere il minimo impatto visivo. Q3 220V è totalmente direzionabile, ed è disponibile in ottiche differenti per adattarsi a qualsiasi esigenza e tipologia di ambiente. Un perfetto design dove l'alimentatore è occultato nel corpo del faretto.

Excellent luminescent performances for a professional projector in aluminium installable on 220V rail and dust painted. Q3 220V is designed for having the minimal visual impact and is completely adjustable. Available with different lens, it adapts itself to any necessities and to any kinds of environments. A perfect product of design in which the driver remains hidden in the body of the spotlight.



CODE COMPOSITION

T220 L 00007		ND 0
		<i>light colour</i>
27	2700K	
30	3000K	
40	4000K	
		<i>lens</i>
15	15°	
30	30°	
50	50°	
		<i>finishing</i>
W1	white	
B1	black	

example of code composition T220 L 00007 **W1 15 27** ND 0

TECHNICAL FEATURES


Code	T220 L 00007 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black
Weight	0.6 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 28W
Luminous efficacy	2600 lm - 3000K
Light distribution	Beam 30° Beam 15° 50° (on request)
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.



Q3 220V
Castello Visconteo, Leonardo Da Vinci gallery - Cassano D'Adda, Milan



Q4 220V

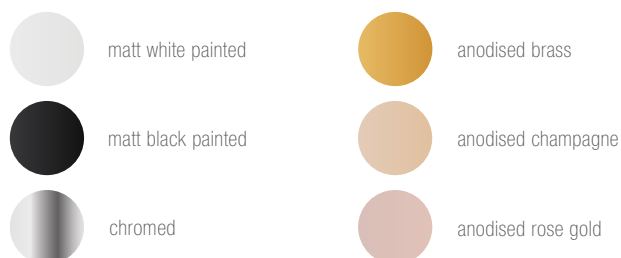


Proiettore per binario 220V con sorgente luminosa a LED (COB) CRI 90, 3000K (2700K su richiesta) alimentata in corrente continua con convertitore a scomparsa collocato all'interno dell'adattatore del prodotto.

Q4 220V è un apparecchio per interni che garantisce il minimo impatto visivo, completamente orientabile a 360°, è disponibile in più varianti ottiche. Proiettore ad alte performance in alluminio verniciato a polvere disponibile in diverse finiture: bianco, nero, cromo, brass, anodizzato champagne e rose gold.

Projector for 220V track for LED (COB) CRI 90, 3000K (2700K light source on request) supplied in direct current with recessed convertor located inside the product's adaptor.

Q4 220V is a light fitting for interiors which guarantees minimum visual impact, completely adjustable at 360°; it is available in a variety of optics. High performance projector in powdered varnish aluminium available in various finishes: black, white, chromed, brass, anodised champagne and rose gold.

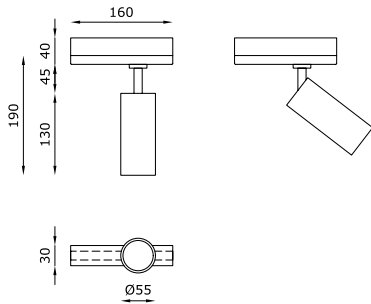

CODE COMPOSITION

T220 L 00008		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
		<i>light colour</i>
27	2700K	
30	3000K	
		<i>lens</i>
14	14°	
35	35°	
55	55°	
		<i>finishing</i>
W1	white	
B1	black	
CP	chromed	
BR	brass	
A1	champagne	
A2	rose gold	

example of code composition

T220 L 00008 **W1 14 27 ND 0**

TECHNICAL FEATURES

Code	T220 L 00008 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Chromed Brass Champagne Rose Gold
Weight	0.5 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 35° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track. Black tige for Q4 220V chromed, anodised brass, anodised champagne and anodised rose gold.

INCISO Q4 220V




INCISO Q4 220V è un proiettore da binario dalle caratteristiche uniche. INCISO Q4 220V mantiene le stesse caratteristiche tecniche di Q4 220V, ma dal punto di vista estetico l'utilizzo del materiale DurCoral®, permette di plasmare la materia, incidere e creare dei motivi che lo rendono unico nella sua categoria.

La ricerca dei materiali che contraddistingue la collezione Buzzi & Buzzi si unisce alla tecnologia IRON per dare vita ad un prodotto innovativo. Si tratta infatti del primo proiettore in cemento DurCoral® con un'anima in acciaio. DurCoral® è un materiale due volte più resistente del cemento, antigraffio, personalizzabile con qualsiasi tipo di pittura e dalle elevate prestazioni meccaniche.

INCISO Q4 220V is a track projector with unique characteristics. INCISO Q4 220V retains the same technical characteristics as the Q4 220V, but from the aesthetic point of view, the use of the DurCoral® material allows the material to be moulded and engraved to create patterns that make it unique in its category.

The research into the materials that characterise the Buzzi & Buzzi collection combine with the IRON technology to create an innovative product. It is in fact the first projector in DurCoral® cement with a steel core. DurCoral® is a material twice as resistant as cement, scratch-proof, customisable with any type of paint and with high mechanical performances.

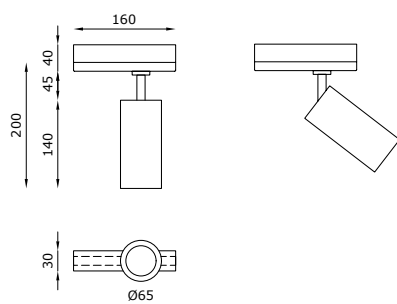

CODE COMPOSITION

T220 L 00016		0
		<i>dimmiability</i>
ND	non dimmable	
DA	DALI	
		<i>light colour</i>
27	2700K	
30	3000K	
		<i>lens</i>
14	14°	
34	35°	
55	55°	
		<i>finishing</i>
T1	see texture below	
T2	see texture below	
T3	see texture below	
T4	see texture below	

example of code composition


T220 L 00016 **T1 14 27 ND 0**

TECHNICAL FEATURES


Code	T220 L 00016 XX
Type	Projector ± 360° / ± 90°
Material	DurCoral®
Finishing	T1 T2 T3 T4
Weight	0.6 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 9W
Luminous efficacy	850 lm - 3000K
Light distribution	Beam 35° Beam 14° 55° (on request)
Light colour	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.




T1



T2



T3



T4





ML 220V




matt white painted



matt black painted

Un punto di vista puntuale, in grado di enfatizzare particolari e spazi esclusivi: ML 220V, apparecchio illuminante da interni per installazione su binario 220V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, completamente orientabile a 360°, è studiato per avere il minimo impatto visivo.

A punctual point of view able to emphasize details and exclusive spaces: ML 220V, installable on 220V rail, is characterized by a combination of precision and strength. The professional projector, capable of high performances, is designed for having a minimal visual impact and is provided with an adjustable arm which can be inclined up to 360°.

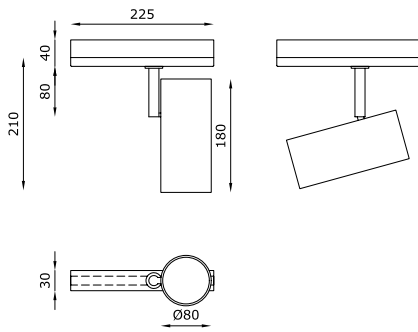

CODE COMPOSITION

T220 L 00009		0	
		<i>dimmiability</i>	
ND	non dimmable		
DA	DALI		
		<i>light colour</i>	
27	2700K		
30	3000K		
40	4000K		
		<i>lens</i>	
24	24°		
38	38°		
		<i>finishing</i>	
W1	white		
B1	black		

example of code composition

T220 L 00009 **W1 24 27 ND 0**

TECHNICAL FEATURES

Code	T220 L 00009 XX
Type	Projector $\pm 360^\circ / \pm 90^\circ$
Material	Aluminum
Finishing	White I Black
Weight	1 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3300 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.


GL 220V



matt black painted

GL 220V, apparecchio illuminante da interni per installazione su binario a 220V, è caratterizzato da un connubio di precisione e forza. Il proiettore professionale, dalle alte prestazioni, è studiato per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile.

GL 220V, a light fitting for interiors for installation on 220V track, it is characterised by a blend of precision and strength. The professional projector, with high performances, is designed to have minimal visual impact, fitted with directional arm and adjustable.



CODE COMPOSITION

T220 L 00010 B1 0	
<i>dimmiability</i>	
ND	non dimmable
DA	DALI
<i>light colour</i>	
27	2700K
30	3000K
40	4000K
<i>lens</i>	
24	24°
38	38°

example of code composition T220 L 00010 B1 24 27 ND 0


TECHNICAL FEATURES

Code	T220 L 00010 XX
Type	Projector $\pm 360^\circ / \pm 90^\circ$
Material	Aluminum
Finishing	Black
Weight	1 Kg
Mounting	Track 220V
IP rating	IP40
Insulation class	III
Control gear	Electronic driver on board (included)
Lamp type	LED
Lamp wattage	1 x 26W
Luminous efficacy	3600 lm - 3000K
Light distribution	Beam 24° Beam 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	A new breakthrough in luminaire design. Track adapter with built-in LED driver. Driver concealed into track.

220V


TRACKS

L40

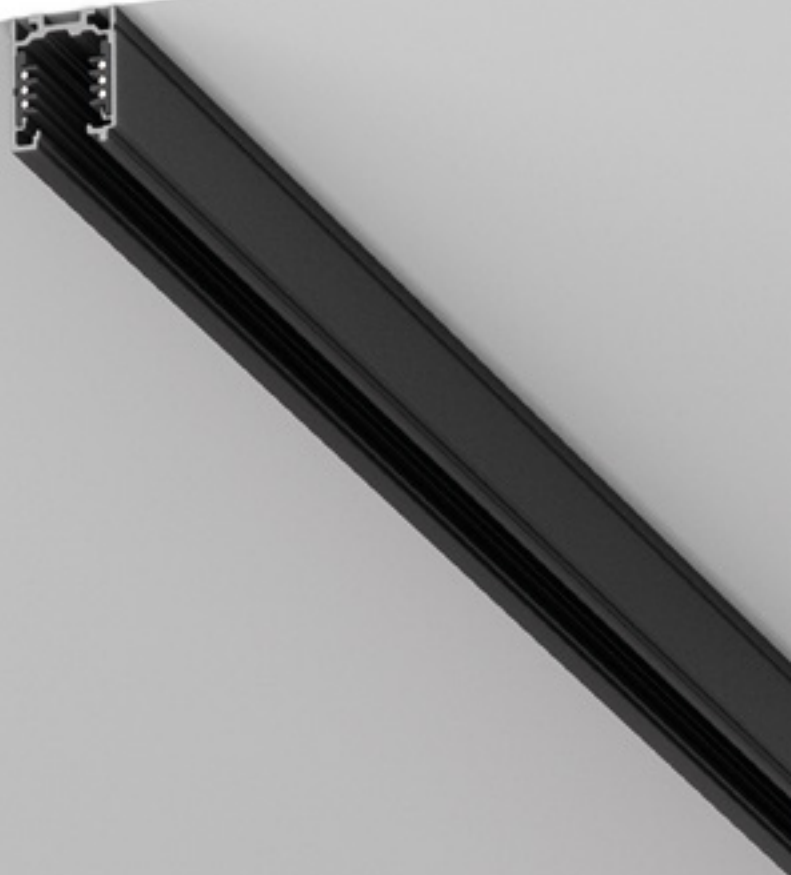



L40

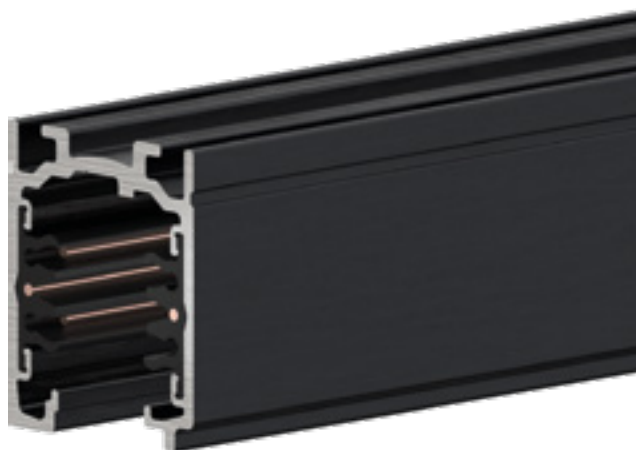


matt white RAL 9010 painted



matt black RAL 9005 painted

LIGHT MODULES



GL 220V
138



INCISO Q4 220V
132



M1 220V
114



ML 220V
136



Q1 220V
118



Q2 220V
122



Q3 220V
126



Q4 220V
130



X1 220V
104



Y1 220V
106




Z1 220V
110

Sistema di illuminazione da interno per installazione a sospensione e a superficie. Il profilo ha dimensioni minimali e lunghezze comprese fra 1 m e 3 m, è realizzato in alluminio estruso con finitura nero o bianco, dotato di 6 conduttori in rame.

L40 a 220V si completa a sua volta con tutti i prodotti di illuminazione Buzzi & Buzzi dotati di un'elettronica integrata.

Lighting system for interiors for pendant and surface installation. The profile has minimum dimensions and lengths between 1 and 3 m. It is made in extruded aluminium with black or white finish, fitted with 6 copper wires.

The 220V L40 is in turn completed with all Buzzi & Buzzi lighting products fitted with integrated electronics.

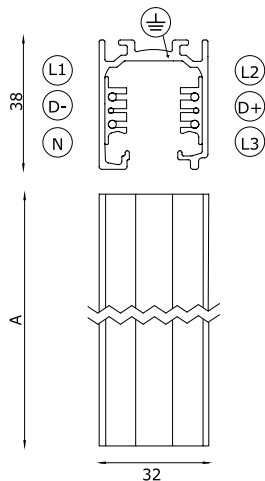

CODE COMPOSITION

T220 T 03	1	2		
			<i>length</i>	
			01	1000 mm
			02	2000 mm
			03	3000 mm
			<i>finishing</i>	
			W2	white
			B1	black

example of code composition T220 T 03 W2 1 01 2

TECHNICAL FEATURES

Code	T220 T 03 XX
Type	Three-phase track
Material	Aluminum
Finishing	White RAL 9010 Black RAL 9005
Weight	-
Mounting	Surface Suspension
IP rating	-
Insulation class	-
Control gear	-
Dimensions	A: 1000 mm 2000 mm 3000 mm
Cut out for plasterboard	-
Voltage connection	220-240V · 50/60Hz
Circuits	L1/L2/L3/N/terra 16A-440V + D+/D- 2 x 1A · 50V ac FELV (DALI)
Load on phases	3.6kVA / 10.8kVA
Note	The supply connectors, plugs and further fixture accessories must be ordered separately. Any 90° connector must be ordered separately to ensure electric continuity in the corners. Light points cannot be installed in the corners. For ceiling or wall mounting, it's sufficient to fix the rail directly with self-tapping countersunk head screws, while the suspended installation requires the purchase of the specific kit.

TESTATA
DI ALIMENTAZIONE
POWER HEAD




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
27 W2	white RAL 9010
28 B1	black RAL 9005
example of code composition	T220 A 00027 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Power head with polarity on the right
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	-



GIUNTO PASSANTE
THROUGH JOINT




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
29 W2	white RAL 9010
30 B1	black RAL 9005
example of code composition	T220 A 00029 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified through joint
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	Insert the electrified joint between two three-phase tracks taking care to keep the polarity in the same position so as to guarantee electric continuity between the tracks.



GIUNTO PASSANTE E DI
ALIMENTAZIONE
SUPPLY THROUGH JOINT



CODE COMPOSITION


T220 A 000_	
	<i>finishing</i>
54 W2	white RAL 9010
55 B1	black RAL 9005
example of code composition	T220 A 00054 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Supply through joint
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	The supply joint makes it possible to electrify the track from any point on its length and not from a head.

Insert the supply through joint between two three-phase tracks taking care to maintain the **polarity** in the same position so as to guarantee electric continuity between the tracks.

Necessary in all those situations where it is not possible to feed from a head or when you want to create closed figures.



GIUNTO ANGOLARE A 90° PER CURVA A DESTRA

90° CORNER JOINT
FOR RIGHT TURN




CODE COMPOSITION

T220 A 000_	finishing	
31 W2	white RAL 9010	
32 B1	black RAL 9005	

example of code
composition T220 A 00031 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified 90° corner joint for right-hand turn with internal polarity and external grounding
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	max 3.6kVA / 10.8kVA
Note	Electrified 90° angle connector to insert between two three-phase tracks, taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO ANGOLARE A 90° PER CURVA A SINISTRA

90° CORNER JOINT
FOR LEFT TURN




CODE COMPOSITION

T220 A 000_	finishing	
33 W2	white RAL 9010	
34 B1	black RAL 9005	

example of code
composition T220 A 00033 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified 90° corner joint for left-hand turn with external polarity and internal grounding
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Carico sulle fasi	max 3.6kVA / 10.8kVA
Note	Electrified 90° angle connector to insert between two three-phase tracks, taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “X”

“X” CONNECTOR




CODE COMPOSITION

T220 A 000_	finishing	
39 W2	white RAL 9010	
40 B1	black RAL 9005	

example of code
composition T220 A 00039 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified “X” connector
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	Max 3.6kVA / 10.8kVA
Note	Electrified “X” connector between four three-phase perpendicular tracks to be positioned taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “T” PER INTERSEZIONE A DESTRA

“T” CONNECTOR
FOR RIGHT INTERSECTION




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
35 W2	white RAL 9010
36 B1	black RAL 9005

example of code composition
T220 A 000**35 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified “T” connector for right intersection with internal polarity on the left and external grounding on the right
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	3.6kVA / 10.8kVA
Note	Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “T” PER INTERSEZIONE A DESTRA

“T” CONNECTOR
FOR RIGHT INTERSECTION




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
50 W2	white RAL 9010
51 B1	black RAL 9005

example of code composition
T220 A 000**50 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified “T” connector for right intersection with internal polarity on the right and external grounding on the left
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	3.6kVA / 10.8kVA
Note	Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A “T” PER INTERSEZIONE A SINISTRA

“T” CONNECTOR
FOR LEFT INTERSECTION




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
37 W2	white RAL 9010
38 B1	black RAL 9005

example of code composition
T220 A 000**37 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified “T” connector for intersection on the left with external polarity on the left and internal grounding on the right
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	3.6kVA / 10.8kVA
Note	Electrified “T” connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO A "T" PER INTERSEZIONE A SINISTRA

"T" CONNECTOR
FOR LEFT INTERSECTION




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
52 W2	white RAL 9010
53 B1	black RAL 9005

example of code composition
T220 A 000**52 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Electrified "T" connector for intersection on the left with external polarity on the right and internal grounding on the left
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	3.6kVA / 10.8kVA
Note	Electrified "T" connector to be inserted between three three-phase tracks taking care to maintain polarity in the same positions so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



GIUNTO FLESSIBILE

FLEXIBLE JOINT




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
41 W2	white RAL 9010
42 B1	black RAL 9005

example of code composition
T220 A 000**41 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Flexible electrified joint
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	Plug-in
Insulation class	-
Voltage connection	16A · 440V, 1A · 50V ac FELV 220-240V · 50/60Hz
Load on phases	3.6kVA / 10.8kVA
Note	Use the flexible electrified joint to connect the two tracks on different surfaces (ceiling-wall) or to create angles other than 90° and guarantee that the current passes through. Insert the flexible electrified joint, supplied pre-wired, between two three-phase tracks taking care to maintain polarity in the same position so as to guarantee electric continuity between the tracks. Light points cannot be installed in the corners.



TAPPO DI CHIUSURA

CLOSURE PLUG




CODE COMPOSITION

T220 A 000_	
	<i>finishing</i>
43 W2	white RAL 9010
44 B1	black RAL 9005

example of code composition
T220 A 000**43 W2**

TECHNICAL FEATURES

Code	T220 A XX
Type	Closure plug
Material	Polycarbonate
Finishing	White RAL 9010  Black RAL 9005 
Fixing	By screws
Insulation class	-
Voltage connection	-
Load on phases	-
Note	-



COVER DI CHIUSURA

CLOSING COVER




CODE COMPOSITION

T220 A 000_	
	finishing
45 W2	white RAL 9010
46 B1	black RAL 9005
example of code composition	T220 A 000 45 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Aesthetic closing cover
Material	PVC
Finishing	White RAL 9010 
	Black RAL 9005 
Fixing	-
Insulation class	-
Dimensions	L 1000 mm
Note	Aesthetic cover to close the track installable on the bottom between the various light points, to hide the internal part of the track and to permit aesthetic continuity.



TRONCHESE

CUTTER




CODE COMPOSITION

TRK 00000 42	
--------------	--

TECHNICAL FEATURES

Code	TRK 00000 42
Type	Conductor cutting pliers
Material	-
Finishing	-
Fixing	-
Note	The 1000/2000/3000 mm long tracks are supplied with copper wires already tested with respect to the aluminium in order to prevent the copper terminals from coming into contact with each other, in the case of double power supply, or, to prevent them from touching each other, if closure plugs are used. If it should be necessary to shorten the length of the track during installation, use the special cutting nippers taking care to pull out the four wires by at least 5 mm to guarantee correct electric distances.



KIT SOSPENSIONE E GIUNZIONE

SUSPENSION AND JUNCTION KIT




CODE COMPOSITION

T220 A 000_	
	finishing
47 W2	white RAL 9010
48 B1	black RAL 9005
example of code composition	T220 A 000 47 W2

TECHNICAL FEATURES

Code	T220 A XX
Type	Suspension and junction kit
Material	Steel
Finishing	White RAL 9010 
	Black RAL 9005 
Fixing	-
Note	Wire 3 m long (on request available in different lengths). Kit composed of a metallic spherical rose, steel lead Ø 1.5 mm with 3 m length and automatic screw coupling fixed to the bracket. Position the fixture kit with an inter-axis of 450 mm for a max capacity of 36 kg or of 900 mm for max 25 kg. The finish refers only to the bracket.

EXAMPLE OF INSTALLATION

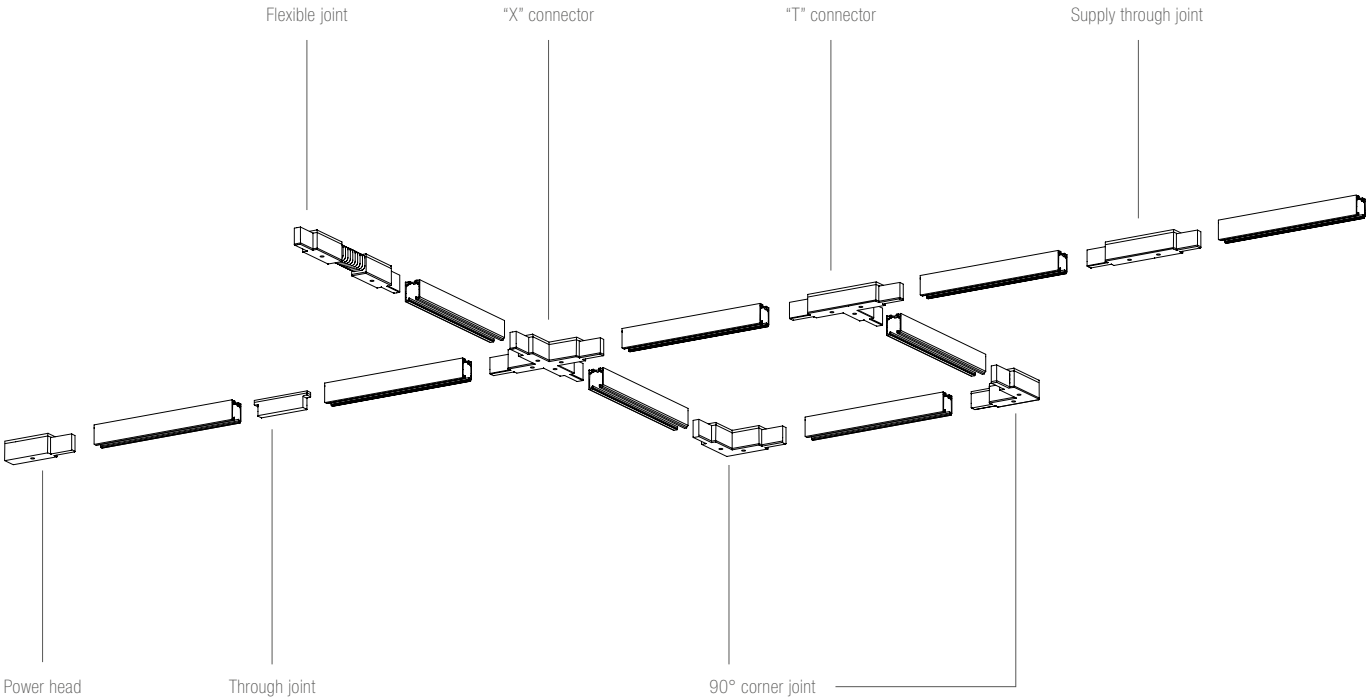



Indoor stand alone Indoor stand alone Indoor stand alone Indoor stand alone

156	Y1D
158	F50
162	XJR8
166	XJR9
170	Genius Basic Naked
172	Genius Naked
178	Twin Genius Naked
180	Genius Concrete

Recessed

STAND ALONE

Y1D



pending



matt white painted



chromed



matt black painted



anodised brass

INCASSO IN BATTUTA.

Y1D è un proiettore cilindrico per ambienti interni, adatto per installazioni a soffitto o parete, con dimensioni molto ridotte per un minimo impatto visivo della sorgente.


Ha finitura di serie bianca o nera opaca e ottiche intercambiabili.

Y1D è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con linearità ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.

RECESSED TILL END POSITION.

Y1D is a cylindrical projector for indoor environments, suitable for ceiling or wall installations, with small dimensions for minimum visual impact of the light source.

It is produced with a white or opaque black finish with interchangeable optics. Y1D is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with linearity and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.



CODE COMPOSITION

1053 _ 4 R _ E _ WD

light colour

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
CP	chromed
BR	brass

example of code composition

1053 **WH** 4 R **22** E **27** WD

TECHNICAL FEATURES

Code	1053 XX
Type	Projector $\pm 360^\circ / \pm 90^\circ$
Material	Aluminum
Finishing	White Black Chromed Brass
Weight	0.4 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver (not included)
Cut out for plasterboard	$\varnothing$ 40 mm
Lamp type	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 x 8W
Luminous efficacy	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	Black tige and roof plate for Y1D chromed and anodised brass.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1053 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1, n°2 or n°3 code 1053 XX - 700 mA

F50




matt white painted

MINI INCASSO IN BATTUTA CON DIAMETRO 35 mm.

Una luce puntuale che definisce gli spazi. F50 è un incasso da interni per installazione in parete e soffitto di cartongesso, disponibile con finitura bianca, in grado di inserirsi nelle superfici. Essenziale e deciso, è una fonte di luce pura, per un risultato inconfondibile.

MINI RECESSED LUMINAIRE WITH A DIAMETER OF 35 mm.

A punctual light which defines spaces. F50 is a recessed indoor luminaire installable on plasterboard walls and ceilings and available with white finishings. It is a product which perfectly integrates itself with the surfaces it applies to. Sharp and essential, it is a pure source of light which gives a unique effect.



CODE COMPOSITION

1022 WH 2 R 00 E _ WD

light colour

27 2700K
30 3000K

example of code composition 1022 WH 2 R 00 E **30** WD

TECHNICAL FEATURES

Code	1022 XX
Type	Downlight 90° Wall recessed 90°
Material	Aluminum
Finishing	White
Weight	0.04 Kg
Mounting	Wall and ceiling recessed
IP rating	IP20
Insulation class	III
Control gear	Constant current electronic driver (not included)
Cut out for plasterboard	Ø 32 mm
Lamp type	LED Vf: 3 VDC
Lamp wattage	1W - 350mA 2W - 500mA
Luminous efficacy	75 lm - 3000K - 350mA 170 lm - 3000K - 500mA
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1022 XX	H8350	Constant current electronic driver	Suitable for n°1 code 1022 XX - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 1022 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 1022 XX - 500 mA






XJR8



matt white painted

XJR8 sa rispondere con tecnicità alle richieste di ogni singolo ambiente: apparecchio da interni a incasso per installazione in parete e soffitto di cartongesso disponibile con finitura bianca. La sorgente luminosa, retrocessa e con meccanica a vista orientabile, dona una luce precisa e puntuale senza sacrificare l'eleganza degli spazi.

XJR8, a recessed indoor luminaire installable on plasterboard walls or ceilings, provides technical quality for any types of environment. Available with white finishings, it has a backward light source with visible mechanisms which emanates precise and punctual beams without renouncing space elegance.



CODE COMPOSITION

1031 WH 2 R 40 E _ WD

light colour

27	2700K
30	3000K
40	4000K

1034 WH 4 R 40 E 98 WD

example of code composition 1031 WH 2 R 40 E 30 WD

TECHNICAL FEATURES


Code	1031 XX	1034 XX
Type	Tilttable downlight and wall recessed $\pm 30^\circ$ 	Tilttable downlight and wall recessed $\pm 30^\circ$ 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.25 Kg	0.25 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote constant current electronic driver** (not included)
Cut out for plasterboard	76 x 76 mm	76 x 76 mm
Lamp type	LED 500 mA  Vf: 18 VDC	LED 350 mA  Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**XJR8 Dim to Warm requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1031 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 1031 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 1031 XX - 500 mA
1034 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 1034 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 1034 XX

XJR8



CODE COMPOSITION

1032 WH 6 R 00 E 00 WD

1033 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	1032 XX	1033 XX
Type	Tiltable downlight and wall recessed $\pm 30^\circ$ 	Tiltable downlight and wall recessed $\pm 30^\circ$ 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.15 Kg	0.15 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP20	IP20
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	76 x 76 mm	76 x 76 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A	A
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
1032 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
1033 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V




XJR9



matt white painted

La soluzione ottimale per sottolineare dettagli e particolari: XJR9, apparecchio da interni a incasso per installazione in parete o soffitto di cartongesso, disponibile con finitura bianca, è una lezione di equilibrio tra bellezza ed eleganza, stile e discrezione. La sorgente luminosa, con meccanica a vista orientabile, crea una luce che sa impreziosire gli ambienti senza sovrapporsi ad essi.

The best solutions for underlining details and hues: XJR9, a recessed indoor luminaire installable on plasterboard walls or ceilings, is available with white finishings and provides a balance between beauty and elegance, style and discretion. The light source with adjustable visible mechanisms creates beams which embellish the environment without invading it.



CODE COMPOSITION

1041 WH 2 R 40 E _ WD

light colour

27	2700K
30	3000K
40	4000K

1044 WH 4 R 40 E 98 WD

example of code composition 1041 WH 2 R 40 E 30 WD

TECHNICAL FEATURES


Code	1041 XX	1044 XX
Type	Tilttable downlight and wall recessed $\pm 30^\circ$ 	Tilttable downlight and wall recessed $\pm 30^\circ$
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.20 Kg	0.20 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote constant current electronic driver** (not included)
Cut out for plasterboard	$\varnothing 75$ mm	$\varnothing 75$ mm
Lamp type	LED 500 mA Vf: 18 VDC	LED 350 mA Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**XJR9 Dim to Warm requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1041 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 1041 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 1041 XX - 500 mA
1044 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 1044 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 1044 XX

XJR9



CODE COMPOSITION

1042 WH 6 R 00 E 00 WD

1043 WH 6 R 00 E 00 WD

TECHNICAL FEATURES


Code	1042 XX	1043 XX
Type	Tilttable downlight and wall recessed $\pm 30^\circ$ 	Tilttable downlight and wall recessed $\pm 30^\circ$ 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.10 Kg	0.10 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP20	IP20
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	Ø 75 mm	Ø 75 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A	A
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
1042 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
1043 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V




GENIUS BASIC NAKED

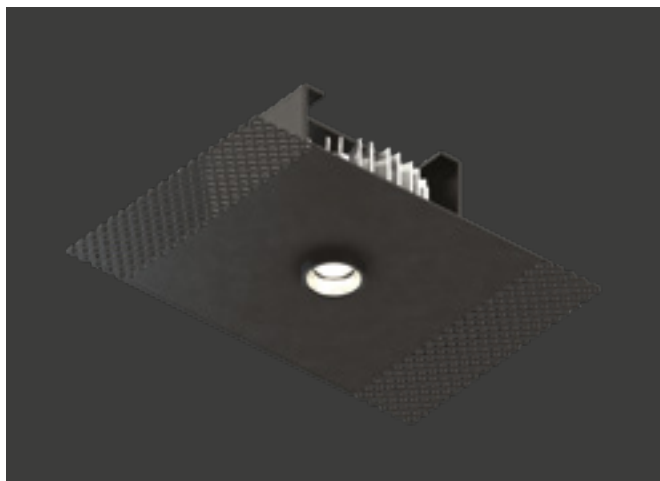

IL PIÙ COMPATTO DA INSTALLARE SU QUALSIASI MATERIALE.

Apparecchio da incasso a scomparsa totale per interni, Genius Basic Naked è una variante di Genius Basic, che unisce alle sue note caratteristiche la possibilità di integrazione superficiale in qualunque contesto e materiale. Questo nuovo Genius non solo estende la consueta affidabilità tecnica di Buzzi & Buzzi al concetto di Contract Business, ma è anche installabile su legno, cemento, specchio, marmo, moduli industriali con uno spessore da 4 mm a massimo 30 mm. Inoltre, questa versione è ancora più compatta ed offre la possibilità di installazione in soli 80 mm di intercapedine.

Genius Basic Naked è la sintesi della tecnologia Buzzi & Buzzi in termini di versatilità ed efficienza: unica parte visibile è il foro di soli 20 mm, da cui eroga un flusso di 540 lm; la parte elettrica è estraibile direttamente dal foro luce, senza necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

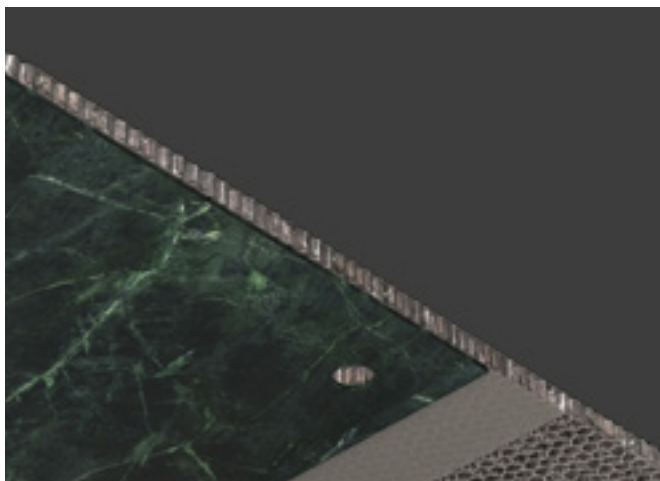


THE MOST COMPACT TO INSTALL ON ANY MATERIAL.


A totally recessed indoor luminaire, Genius Basic Naked is a variation of the Genius Basic, blending its characteristic notes with the possibility of surface integration in any context and material.

Not only does this new Genius extend the usual technical reliability of Buzzi & Buzzi to the Contract Business concept, but it can also be installed on wood, cement, mirror, marble, industrial modules with a thickness of from 4 mm (0.16") to a maximum of 30 mm (1.18").

This version is also more compact and can be installed in a cavity of only 80 mm (3.15").

Genius Basic Naked is the synthesis of Buzzi & Buzzi technology in terms of versatility and efficiency: the only visible part is the light emission hole measuring only 20 mm (0.79"), which provides a light flow of 540 lm; the electrical part can be removed through the light hole, so there is no need for any inspection hatch, nor for invasive maintenance operations.

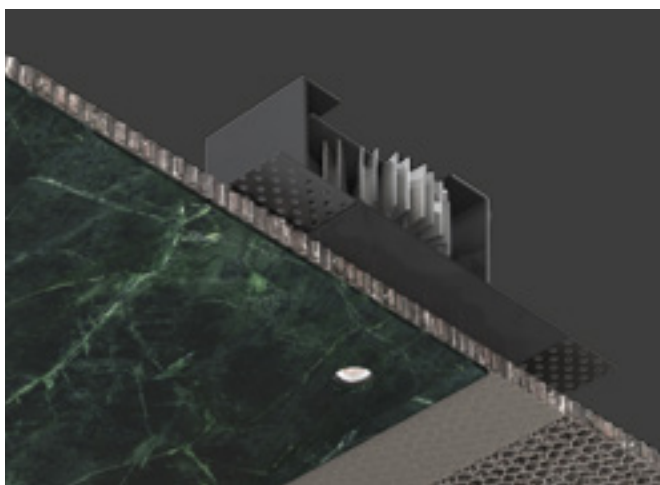



CODE COMPOSITION

1071 BL 4 R 24 E _ WD

light colour

27	2700K
30	3000K
40	4000K

1072 BL 4 R 24 E _ ND

light colour

27	2700K
30	3000K
40	4000K

example of code composition 1071 BL 4 R 24 E 30 WD


TECHNICAL FEATURES

Code	1071 XX	1072 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA  Vf: 6.5 VDC	LED 700 mA 
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	540 lm - 3000K	540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 30 mm deep. This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2071).	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 30 mm deep. This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2072).

OPTIONAL ACCESSORIES

product code	optional code	description	info
1071 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1071 XX - 700 mA

GENIUS NAKED

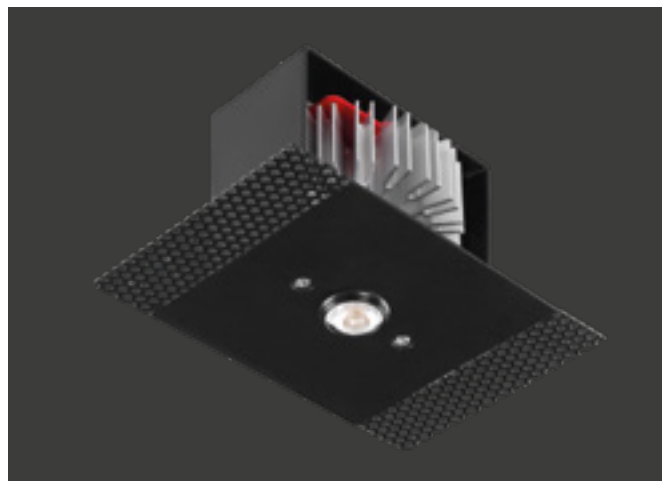

UN GENIUS NUDO ADATTO PER QUALSIASI SUPPORTO E MATERIALE.

Genius Naked è l'evoluzione della famiglia Genius, che estende il concetto di totale integrazione superficiale a qualsiasi materiale e contesto. E' un apparecchio a scomparsa totale, per installazione a soffitto in ambienti interni, che può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 5 mm a massimo 20 mm.

Unica parte visibile è il foro di soli 20 mm, in grado di generare un potente fascio luminoso.

Infatti la variante "Naked" mantiene tutte le prestazioni del Genius, con la parte elettrica estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita l'estrazione e la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.



A BARE GENIUS SUITABLE FOR ANY SUPPORT AND MATERIAL.

Genius Naked is the evolution of the Genius family, extending the total surface integration concept to any material and context. It is a totally recessed luminaire, for ceiling-mounted indoor installation, which can be installed on any surface: wood, cement, mirror, marble, industrial modules with a thickness from 5 mm (0.2") to a maximum of 20 mm (0.79").

The only visible part is the light emission hole of only 20 mm (0.79"), capable of generating a powerful light beam.

In fact, the "Naked" version retains all the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, with no need for any inspection hatch, nor for invasive maintenance operations.



SCOMPARSA TOTALE CON QUALSIASI MATERIALE

TOTALLY CONCEALED INSTALLATION
WITH ANY MATERIAL



legno / wood



marmo / marble




specchio / mirror

il corpo illuminante viene
pre-montato sul pannello di
rivestimento

*the lighting body is pre-mounted
on the cladding panel*

installabile su materiali con
spessore da 5 a 20 mm

*it can be installed on materials with
a thickness from 5 mm (0.2")
to 20 mm (0.79")*

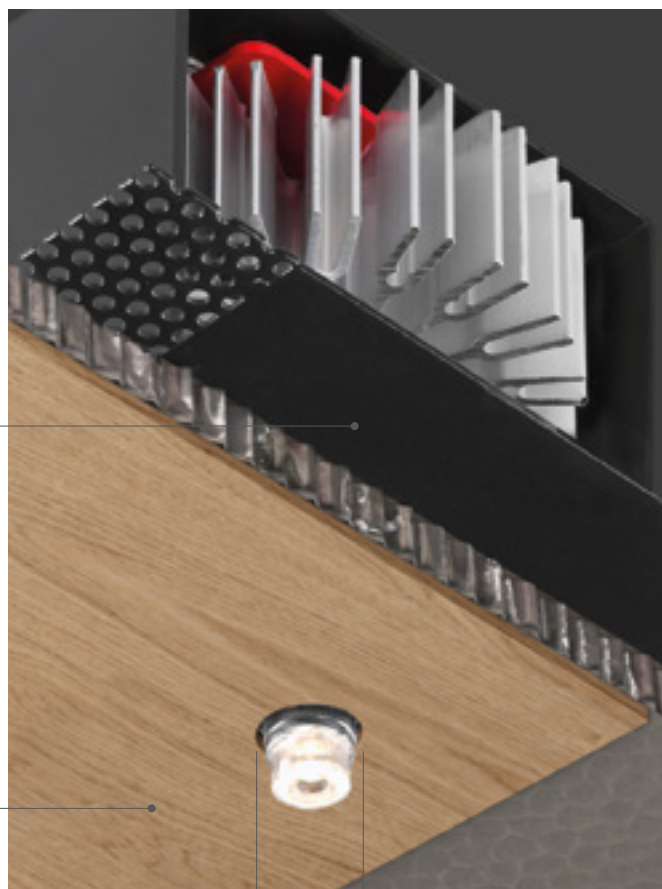


20 mm

l'unica parte visibile è il foro di soli 20 mm

*the only visible part is the emission hole
of 20 mm (0.79")*


PUSH & PULL TECHNOLOGY

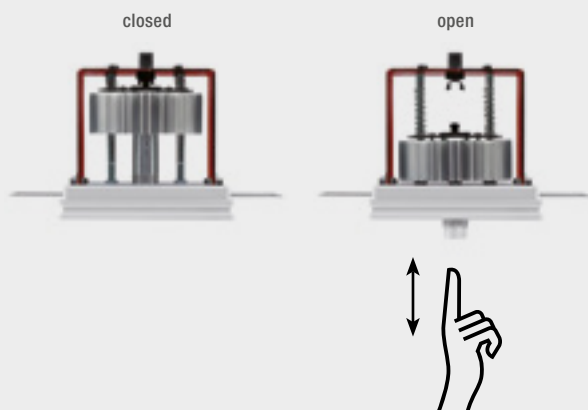

Non necessita di alcuna botola di ispezione. La parte elettrica è estraibile direttamente dal foro luce con un semplice gesto della mano, grazie alla meccanica push-pull, che facilita l'eventuale estrazione e la sostituzione della sorgente LED in caso di manutenzione.

No need for an inspection hatch. The electrical part can be extracted straight from the light hole just with a simple manual gesture, thanks to the push-pull mechanism which makes it easy to extract and replace the LED source for maintenance purposes.

GENIUS NAKED



CODE COMPOSITION

1061 BL 4 R 40 E _ WD

light colour

27	2700K
30	3000K
40	4000K

1062 BL 4 R 40 E _ ND

light colour

27	2700K
30	3000K
40	4000K

example of code composition 1061 BL 4 R 40 E **30** WD

TECHNICAL FEATURES

Code	1061 XX	1062 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA  Vf: 11.5 VDC	LED 700 mA 
Lamp wattage	1 x 8.5W	1 x 8.5W
Luminous efficacy	1000 lm - 3000K	1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep. This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2075).	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep. This product could be ordered with IP65 protection grade (see OUTDOOR section - code 2076).

OPTIONAL ACCESSORIES

product code	optional code	description	info
1061 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 or n°3 code 1061 XX - 700 mA




Genius Naked
Chalet Sauze d'Oulx - AB2ER, Lighting And



Genius Naked
Il foyer, Piazza Teatro alla Scala – Michael Vincent Uy MVUY – Milan




TWIN GENIUS NAKED

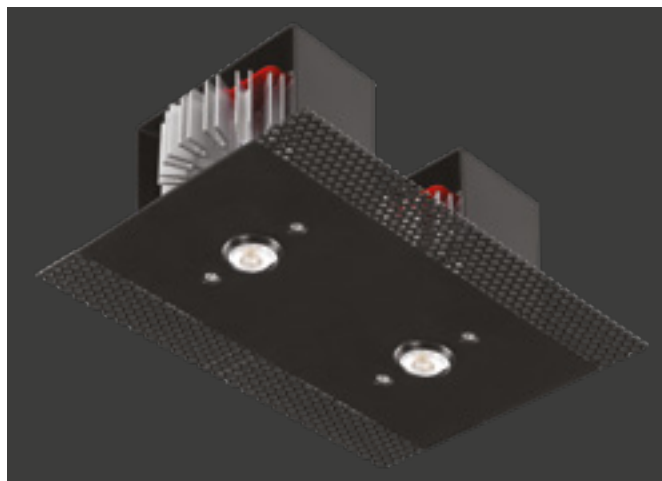

UN GENIUS PER QUALSIASI MATERIALE.

Il design di Genius si raddoppia: Twin Genius, apparecchio da interni a scomparsa totale per installazione a soffitto, che vive ora nella sua versione "Naked", estendendo il concetto di totale integrazione superficiale a qualsiasi materiale e superficie. Dotato di due fori di emissione di soli 20 mm, l'apparecchio scompare completamente quando spento, grazie alla totale integrazione con le superfici in cui è installato: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 5 mm ad un massimo di 20 mm.

L'elettronica mantiene le prestazioni del Genius, con la parte elettrica estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

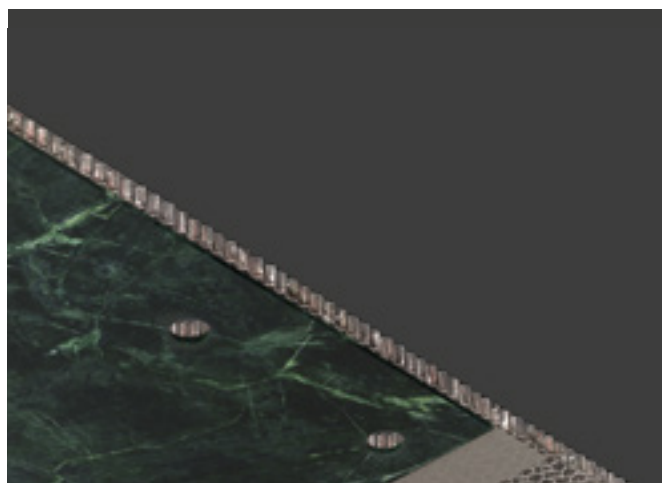



A GENIUS FOR ANY MATERIAL.

The Genius design has been doubled: Twin Genius, a totally recessed indoor luminaire for ceiling mounting, now available in its "Naked" version, extending the total surface integration concept to any material and surface.

Fitted with two light emission holes measuring only 20 mm (0.79"), the luminaire disappears completely when it is switched off, thanks to its total integration with the surfaces on which it is installed: wood, cement, mirror, marble and industrial modules with a thickness from 5 mm (0.2") to a maximum of 20 mm (0.79").

The electronics retain the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, so there is no need for any inspection hatch, nor for invasive maintenance operations.

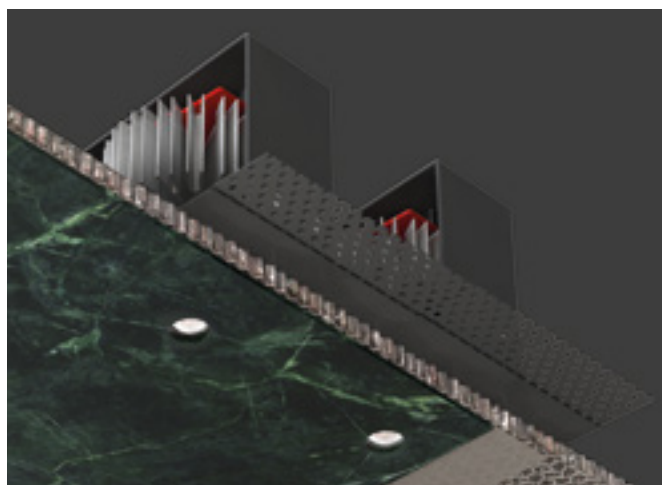

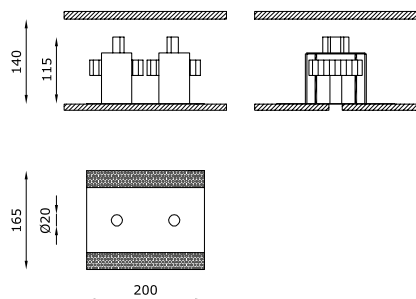

CODE COMPOSITION

1065 BL 4 R 40 E _ WD

light colour

27	2700K
30	3000K
40	4000K

1066 BL 4 R 40 E _ ND

light colour

27	2700K
30	3000K
40	4000K

example of code composition 1065 BL 4 R 40 E **30** WD


TECHNICAL FEATURES

Code	1065 XX	1066 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	1.3 Kg	1.3 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA  Vf: 2 x 11.5 VDC	LED 700 mA 
Lamp wattage	2 x 8.5W	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K	2 x 1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep.	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1065 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1065 XX - 700 mA

GENIUS CONCRETE

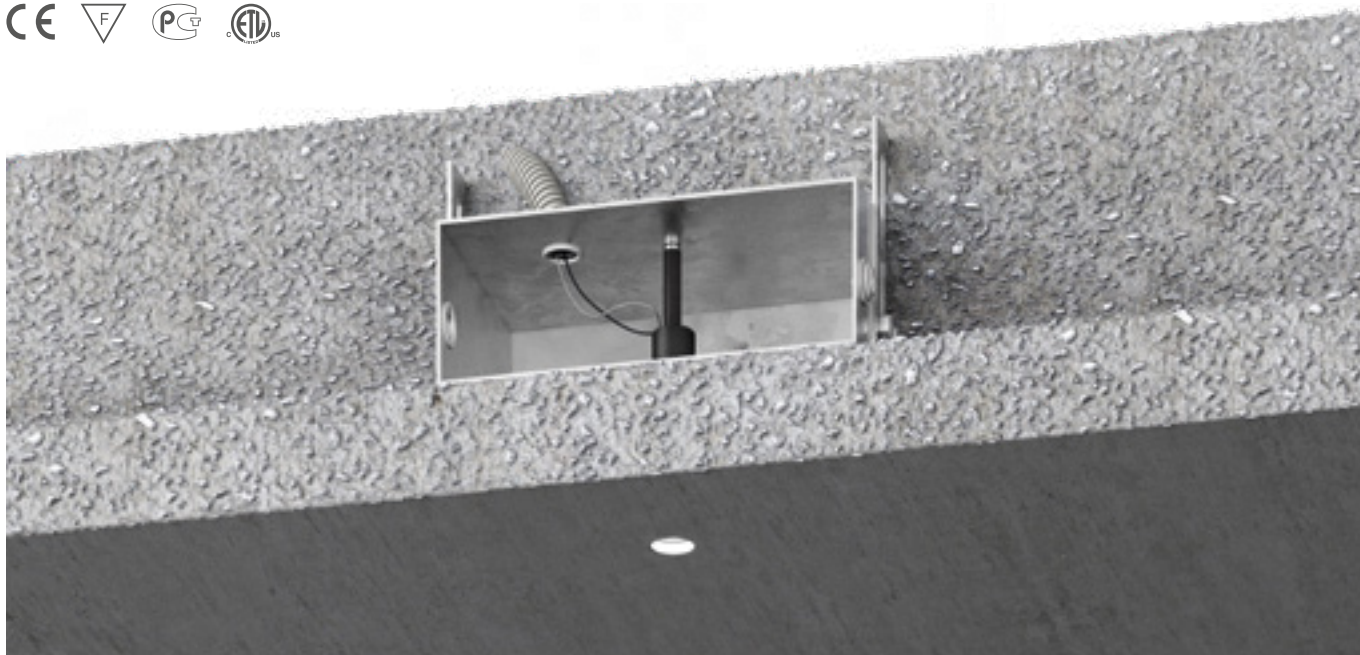

matt black painted

LUCE INTEGRATA NEL CEMENTO FACCIA A VISTA.

Genius Concrete è la variante più rivoluzionaria della linea Genius: un apparecchio a scomparsa totale per interni, concepito per superfici in cemento faccia-vista ed installabile durante la fase di getto del calcestruzzo.

Mantiene le prestazioni del Genius, ma ha un corpo lampada semplificato che funziona come cassaforma a perdere, con la parte elettrica estraibile direttamente dal foro luce, grazie ad un nuovo brevetto che permette l'estrazione e la sostituzione della sorgente LED. L'unica apertura visibile è il foro da 23 mm, senza la necessità di alcuna scatola di ispezione ed è installabile per getti con spessore minimo di 12 mm.

INTEGRATED LIGHT IN EXPOSED CEMENT.

Genius Concrete is the most revolutionary version of the Genius line: a totally recessed indoor luminaire, designed for exposed cement surfaces and installable during the concrete casting phase. It maintains all the performances of the Genius, but has a simplified lamp body which functions as formwork, with the electrical part removable from the light hole, thanks to a new patent which allows the LED light source to be pulled out and replaced.

The only visible aperture is the 23 mm (0.90") outlet, so there is no need for any inspection hatch, and it can be installed with a minimum concrete cover of 12 mm (0.47").

INSTALLABILE DURANTE LA FASE DI GETTO DEL CALCESTRUZZO

INSTALLABLE DURING THE CONCRETE
CASTING PHASE

fissaggio con magnete


magnetic holder

scatola a perdere

disposable box

massima integrabilità con la
superficie (cemento faccia-vista)

*maximum integrability with the
surface (exposed cement)*

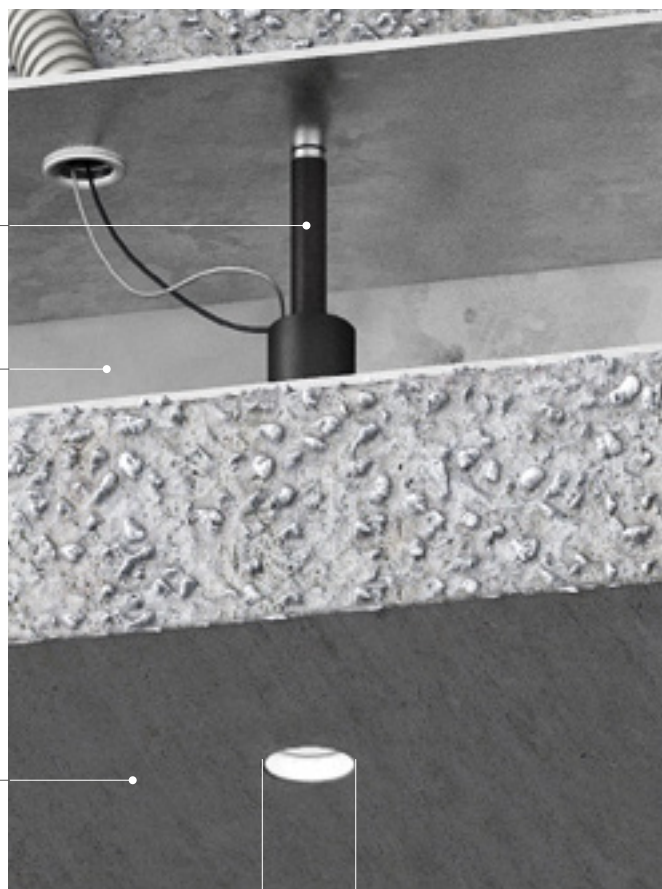


23 mm

l'unica parte visibile è il foro di soli 23 mm

*the only visible part is the emission hole
of 23 mm (0.9")*


INSTALLATION

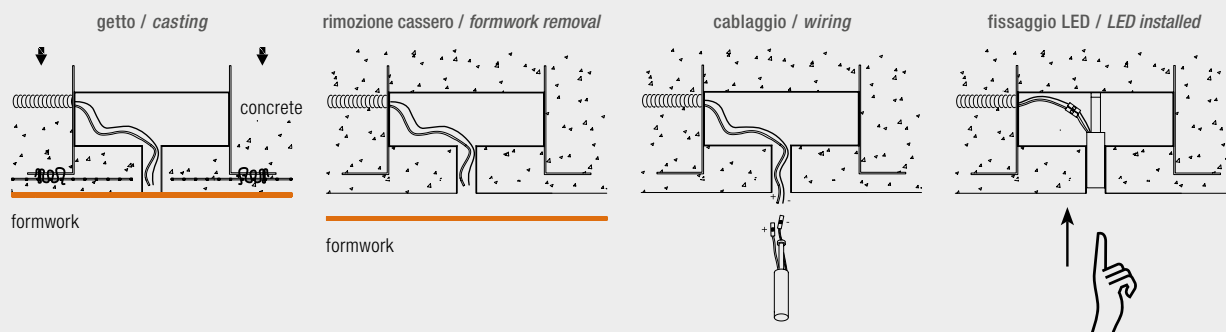

Genius Concrete è installabile durante la fase di getto del calcestruzzo. Grazie ad uno speciale meccanismo, che permette di estrarre la sorgente LED, non sono necessarie botole di ispezione per la manutenzione.

Genius Concrete can be installed during the concrete casting phase. Thanks to a special mechanism which allows the LED source to be extracted, no inspection hatches are required for maintenance purposes.

GENIUS CONCRETE



CODE COMPOSITION

1075 BL 4 R 22 E _ WD

light colour

27	2700K
30	3000K
40	4000K

1076 BL 4 R 22 E _ ND

light colour

27	2700K
30	3000K
40	4000K

example of code composition 1075 BL 4 R 22 E **30** WD

TECHNICAL FEATURES

Code	1075 XX	1076 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	0.4 Kg	0.4 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Cut out for plasterboard	-	-
Lamp type	LED 500 mA  Vf: 11.5 VDC	LED 500 mA 
Lamp wattage	1 x 6W	1 x 6W
Luminous efficacy	600 lm - 3000K	600 lm - 3000K
Light distribution	Beam 22°	Beam 22°
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1075 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1075 XX - 500 mA



Genius Concrete
SUPERFUTUREDESIGN*

186	X1
192	X2
198	X3
202	X4
206	Y1
210	Z1
212	M1
216	Q1

Surface

STAND ALONE

X1



matt white painted



anodised champagne



matt black painted




anodised rose gold

PRIETTORE MINIMALE.

X1 è un apparecchio illuminante da interni, disponibile con finitura bianca, nera, anodizzata rose gold e champagne e lenti intercambiabili, adatto per installazione a soffitto o a parete. Caratterizzato da un proiettore dalle alte prestazioni, dal design minimale per avere il minimo impatto visivo, dotato di braccio direzionabile e inclinabile sull'asse verticale di 360°: una luce puntuale che sa valorizzare spazi e ambienti con discrezione, linearità ed eleganza, rendendo ogni singolo dettaglio il protagonista all'interno dello spazio progettuale. Un prodotto che fa della resistenza e della precisione le sue carte vincenti.

MINIMAL PROJECTOR.

X1 is an indoor luminaire installable on ceilings or walls. It is available with white, black or anodized rose gold or champagne finishings and interchangeable lens. Characterized by a high-performance projector realized with an essential design to obtain a minimal visual impact, it is provided by an adjustable arm which can be inclined up to 360° vertically: a punctual light able to valorize space and environment in a subtle, uniform and elegant way, making every single detail the absolute protagonist of the architectonic project. A product which is by far the best choice in fact of resistance and precision.



A

Indoor Surface stand alone



X1 (fig. A)
OmniDe Showroom
Arch. R. Oppido – London

CODE COMPOSITION

1101 2 S E ND

light colour

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
A1	champagne
A2	rose gold


example of code composition

1101 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1101 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X1 anodised champagne and anodised rose gold.

X1



B

CODE COMPOSITION

1102	2	S	E	WD
<i>light colour</i>				
27				
30				
40				
<i>lens</i>				
22				
50				
<i>finishing</i>				
WH				
BL				
A1				
A2				

example of code composition 1102 WH 2 S 22 E 30 WD

TECHNICAL FEATURES

Code	1102 XX (fig. B)
Type	Projector $\pm 360^\circ / \pm 90^\circ$
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.4 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X1 anodised champagne and anodised rose gold.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1102 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1102 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°1 code 1102 XX - 500 mA



X1 (fig. B)
Chalet Sauze d'Oulx – AB2ER, Lighting And





X2



matt white painted



anodised champagne




matt black painted



anodised rose gold

Un doppio proiettore per una luce che si integra perfettamente nello spazio dove viene installato: X2, apparecchio illuminante da interni, disponibile con finitura bianca, nera, anodizzata oro rosa e champagne e lenti intercambiabili, per installazione a soffitto e a parete. X2 è la risposta perfetta per una luce puntuale, definita e performante. I proiettori dalle alte prestazioni e dal design minimale sono studiati per avere il minimo impatto visivo, sono dotati di braccio direzionabile e inclinabile sull'asse orizzontale e verticale di 360°, consentono un vasto potenziale scenografico.

A double projector for a light which perfectly mingles with the space it is installed in: X2, an indoor luminaire installable on ceilings or walls, is available with white, black or anodized rose gold or champagne finishings and interchangeable lens. X2 is a punctual, definite and performing light. The high-performance projectors of minimal design are conceived for having the lowest visual effect and provided with an adjustable arm which can be inclined up to 360° both horizontally and vertically, allowing a wide range of luminescent settings.



A

CODE COMPOSITION

1202	2	S	E	WD
				<i>light colour</i>
				27 2700K
				30 3000K
				40 4000K
				<i>lens</i>
				22 22°
				50 50°
				<i>finishing</i>
				WH white
				BL black
				A1 champagne
				A2 rose gold

example of code composition 1202 WH 2 S 22 E 30 WD

TECHNICAL FEATURES

Code	1202 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.6 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 2 x 11 VDC
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 anodised champagne and anodised rose gold.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1202 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1202 XX - 500 mA






X2 (fig. A)
Private Villa - Austria



X2 (fig. B)
SUPERFUTUREDESIGN*

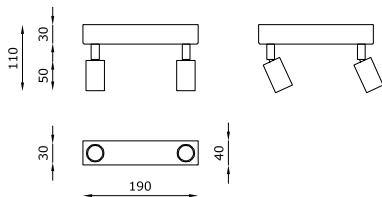

B

CODE COMPOSITION

1201	2	S	E	ND
light colour				
27	2700K			
30	3000K			
40	4000K			
lens				
22	22°			
50	50°			
finishing				
WH	white			
BL	black			
A1	champagne			
A2	rose gold			

example of code composition 1201 **WH** 2 **S** 22 **E** 30 **ND**

TECHNICAL FEATURES

Code	1201 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	0.6 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	2 x 6W
Luminous efficacy	2 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X2 anodised champagne and anodised rose gold.

X3



matt white painted



anodised champagne




matt black painted



anodised rose gold

Tre fasci di luce per tre racconti diversi, tutti accomunati dalle stesse caratteristiche vincenti: alte prestazioni, design minimale e lenti intercambiabili. X3 è un apparecchio illuminante da interni, disponibile con finitura bianca, nera, anodizzata oro rosa e champagne, per installazione a soffitto o parete, perfetto per sottolineare dettagli con una luce spot discreta ma allo stesso tempo incredibilmente efficace. I proiettori sono dotati di braccio direzionabile e inclinabile di 360°.

Three different beams for three different stories which have in common the same winning characteristics: high performances, minimal design and interchangeable lens. X3 is an indoor luminaire installable on ceilings or walls and available with white, black or anodized rose gold or champagne finishings. It is perfect for underlining details with a spot light which is discreet and incredibly efficient at the same time. The projectors are provided with an adjustable arm which can be inclined up to 360°, allowing a wide range of luminescent settings.



A

CODE COMPOSITION

1302	2	S	E	WD
<i>light colour</i>				
27				2700K
30				3000K
40				4000K
<i>lens</i>				
22				22°
50				50°
<i>finishing</i>				
WH				white
BL				black
A1				champagne
A2				rose gold


example of code composition 1302 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1302 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	1 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA Vf: 3 x 1.1 VDC
Lamp wattage	3 x 6W
Luminous efficacy	3 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X3 anodised champagne and anodised rose gold.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1302 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°1 code 1302 XX - 500 mA

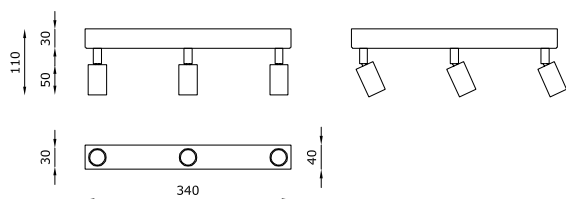

B

CODE COMPOSITION


1301	2	S	E	ND
<i>light colour</i>				
<i>lens</i>				
<i>finishing</i>				

example of code composition

1301 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1301 XX (fig. B)
Type	Projector $\pm 360^\circ$ / $\pm 90^\circ$
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	1 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	3 x 6W
Luminous efficacy	3 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X3 anodised champagne and anodised rose gold.

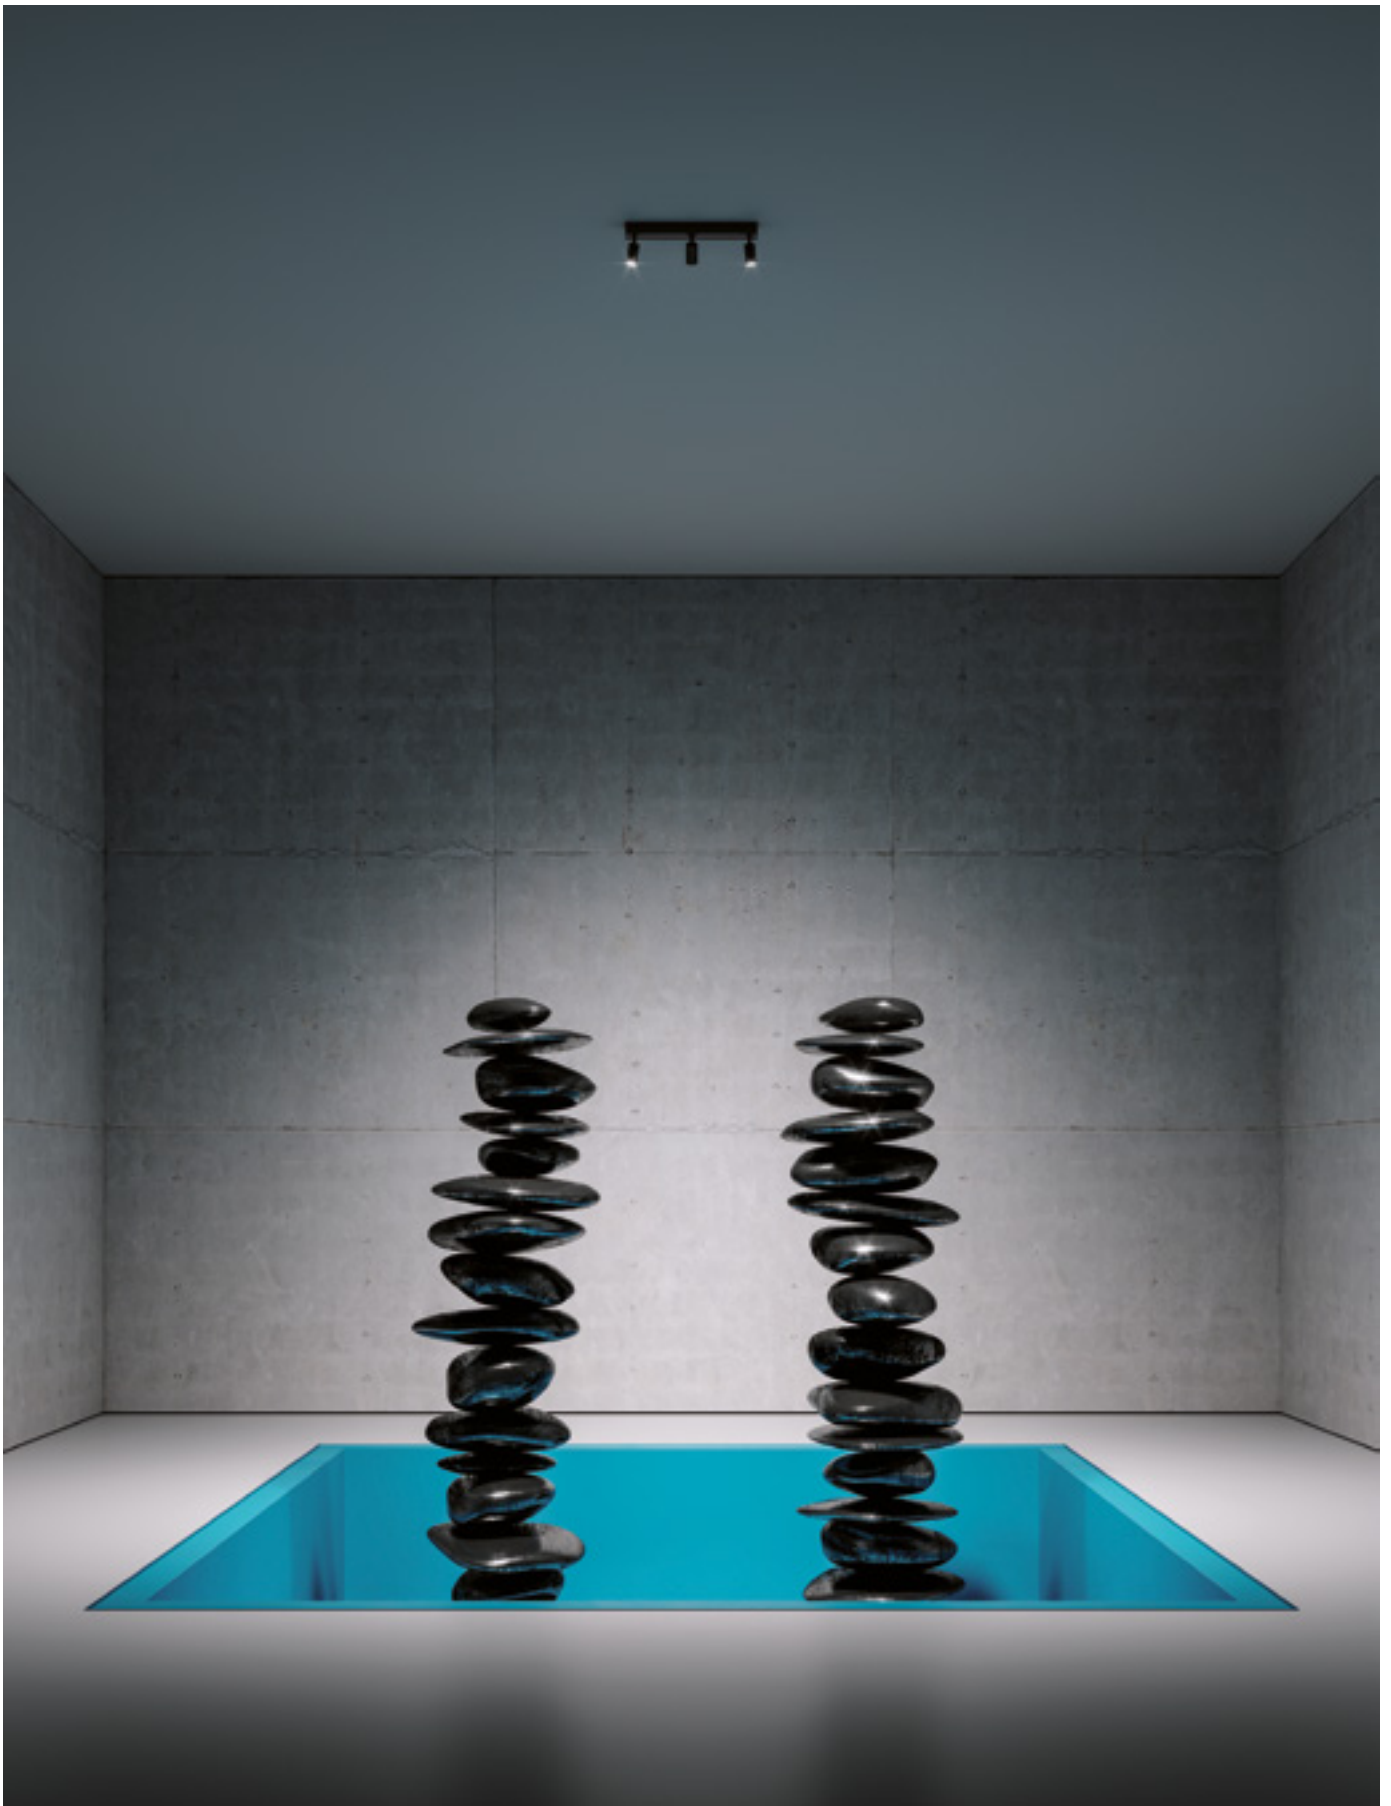

X4



matt white painted



anodised champagne



matt black painted




anodised rose gold

Apparecchio illuminante da interni, disponibile con finitura bianca, nera, anodizzata oro rosa e champagne e lenti intercambiabili, per installazione a soffitto o parete. X4 con 4 proiettori dalle alte prestazioni e dal design minimale è studiato per avere il minimo impatto visivo. Ogni proiettore è dotato di braccio direzionabile e inclinabile di 360°, ognuno dei quali genera una luce spot scenografica dal grande impatto.

Indoor luminaire installable on ceilings or walls, available with white, black or anodized rose gold or champagne finishings and interchangeable lens.

X4 is provided with four high- performance projectors created with a minimal design in order to obtain the lowest visual impact. Each projector has an adjustable arm which can be inclined up to 360°, producing a scenographic spot light of great effect.

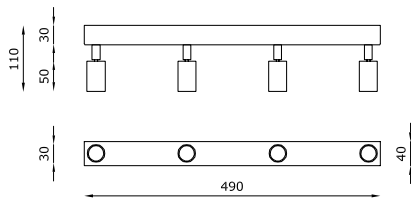

CODE COMPOSITION

1401 _ 2 S _ E _ ND

light colour

27	2700K
30	3000K
40	4000K

lens

22	22°
50	50°

finishing

WH	white
BL	black
A1	champagne
A2	rose gold

example of code composition

1401 WH 2 S 22 E 30 ND

TECHNICAL FEATURES

Code	1401 XX
Type	Projector $\pm 360^\circ / \pm 90^\circ$
Material	Aluminum
Finishing	White Black Champagne Rose Gold
Weight	1.3 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	4 x 6W
Luminous efficacy	4 x 520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and box for X4 anodised champagne and anodised rose gold.



IT'S
HARD
TO
GET
ANY
CLOSER



Y1



matt white painted



chromed



matt black painted



anodised brass

Y1 è un proiettore cilindrico per ambienti interni, adatto per installazioni a soffitto o parete, con dimensioni molto ridotte per un minimo impatto visivo della sorgente.


Ha finitura di serie bianca, nera opaca, brass e cromo e lenti intercambiabili.

Y1 è dotato di un sistema di braccio orientabile a 360°, dagli snodi invisibili. Ha un output luminoso in grado di valorizzare gli ambienti con linearità ed eleganza e, grazie alla sorgente retrocessa, garantisce la riduzione dell'abbagliamento, per il massimo comfort visivo.


Y1 is a cylindrical projector for indoor environments, suitable for ceiling or wall installations, with small dimensions for minimum visual impact of the light source.

It is produced with a white, black or brass and chromed finishings with interchangeable optics.

Y1 is fitted with a 360 degrees-adjustable arm system, with invisible joints. Its light output can valorise environments with linearity and elegance and, thanks to the recessed light source it reduces the glaring effect, for maximum visual comfort.



A



B

CODE COMPOSITION

1111 _ 4 S _ E _ ND			
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>lens</i>	
		22	22°
		50	50°
		<i>finishing</i>	
		WH	white
		BL	black
		CP	chromed
		BR	brass

1112 _ 4 S _ E _ WD			
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>lens</i>	
		22	22°
		50	50°
		<i>finishing</i>	
		WH	white
		BL	black
		CP	chromed
		BR	brass

example of code composition

1111 WH 4 S 22 E 30 ND

TECHNICAL FEATURES

Code	1111 XX (fig. A)	1112 XX (fig. B)
Type	Projector ± 360° / ± 90° 	Projector ± 360° / ± 90°
Material	Aluminum	Aluminum
Finishing	White Black Chromed Brass	White Black Chromed Brass
Weight	0.4 Kg	0.4 Kg
Mounting	Wall and ceiling	Wall and ceiling
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver on board (included)	Constant current electronic driver, remote installation (not included)
Lamp type	LED 700 mA 	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 x 8W	1 x 8W
Luminous efficacy	800 lm - 3000K	800 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	By driver (optional)
CRI	>90	>90
Emergency	On request	On request
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Black tige and driver box for Y1 chromed and anodised brass.	On request available dimmable PUSH or DALI, remote installation. Black tige and box for Y1 chromed and anodised brass.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1112 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1, n°2 or n°3 code 1112 XX - 700 mA



Y1
Private Villa - Austria



Z1



matt white painted




matt black painted

Z1 è un apparecchio per ambienti interni, adatto per installazioni a soffitto o parete e caratterizzato da un proiettore miniaturizzato di soli 23 mm di diametro, completamente direzionabile sugli assi verticale ed orizzontale, per un orientamento a 360°.


Ha finitura di serie bianca o nera. Z1 è un prodotto che garantisce alte prestazioni con il minimo impatto visivo grazie ai suoi snodi invisibili.

Z1 is a luminaire for indoor use, suitable for ceiling or wall installations and characterised by a miniaturised projector with a diameter of only 23 mm (0.90"), completely 360 degree-adjustable over its vertical and horizontal axes.

It is produced with a white or opaque black finish. Z1 is a product which guarantees high performances with minimum visual impact thanks to its invisible joints.



A



B

CODE COMPOSITION

1121

4 S E ND

light colour

27 2700K

30 3000K

40 4000K

lens

22 22°

50 50°

finishing

WH white

BL black

1122

4 S E WD

light colour

27 2700K

30 3000K

40 4000K

lens

22 22°

50 50°

finishing

WH white

BL black

example of code composition

1121 WH 4 S 22 E 30 ND

TECHNICAL FEATURES

Code	1121 XX (fig. A)	1122 XX (fig. B)
Type	Projector ± 360° / ± 90° 	Projector ± 360° / ± 90°
Material	Aluminum	Aluminum
Finishing	White Black	White Black
Weight	0.4 Kg	0.4 Kg
Mounting	Wall and ceiling	Wall and ceiling
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant current electronic driver on board (included)	Constant current electronic driver, remote installation (not included)
Lamp type	LED 500 mA 	LED 500 mA Vf: 11 VDC
Lamp wattage	1x 6W	1 x 6W
Luminous efficacy	520 lm - 3000K	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)	Beam 22° Beam 50° (on request)
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V - 50/60Hz	By driver (optional)
CRI	>90	>90
Emergency	On request	On request
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1122 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°1, n°2 or n°3 code 1122 XX - 500 mA

M1




matt white painted



matt black painted

M1 è una sospensione per interni, installabile a soffitto: è composta da un'asta che conduce la luce in modo diretto e puntuale, e un proiettore completamente direzionabile a 360°, che permette di dirigere la luce verso singoli dettagli dello spazio. Una sospensione dal design minimale con luce spot, disponibile con ottiche differenti. Per il modello installabile a soffitto, è possibile scegliere la versione con cassetta contenente il driver oppure con cassetta minimale ribassata con driver da posizionare remoto.

M1 is a suspended indoor luminaire installable on ceiling: it is composed by a pole which scatters light in a direct and punctual manner. It is also provided by a projector adjustable up to 360°, which allows to redirect the luminescent beam towards the single details within the space. A suspended lamp of minimal design and emanating a spot light, available with different lens. For the model installable on ceilings, it is possible to choose between two versions: one with a case including the driver and one with a minimal lowered case with remote driver installation.

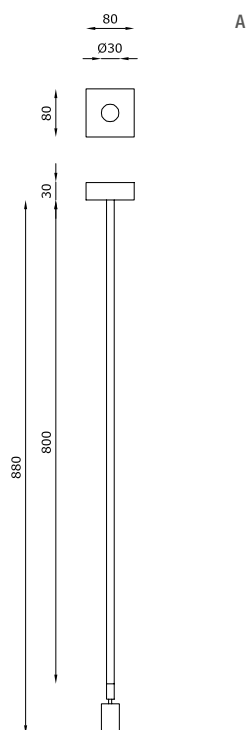


CODE COMPOSITION

1501	2	S	E	ND
light colour				
27	2700K			
30	3000K			
40	4000K			
lens				
22	22°			
50	50°			
finishing				
WH	white			
BL	black			

example of code composition 1501 **BL** 2 S **22** E **30** ND

TECHNICAL FEATURES

Code	1501 XX (fig. A)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.75 Kg
Mounting	Ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 500 mA
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation.

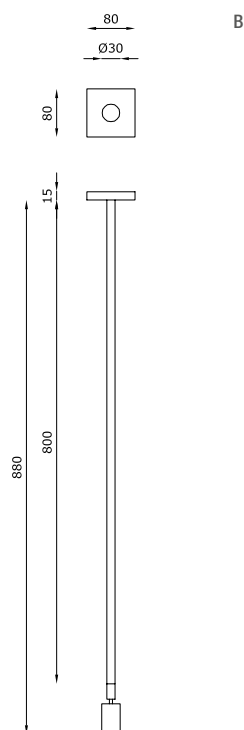

CODE COMPOSITION

1502	2	S	E	WD
				<i>light colour</i>
				27 2700K
				30 3000K
				40 4000K
				<i>lens</i>
				22 22°
				50 50°
				<i>finishing</i>
				WH white
				BL black

example of code composition 1502 **BL** 2 **S** **22** **E** **30** **WD**

TECHNICAL FEATURES

Code	1502 XX (fig. B)
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.75 Kg
Mounting	Ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver, remote installation (not included)
Cut out for plasterboard	-
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1502 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 1502 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°1 code 1502 XX - 500 mA



M1 custom version
Concept - Fedorova Architects - Russia

Q1




ALTA POTENZA CON DRIVER INCLUSO.

Proiettore ad alte performance in metallo verniciato a polvere: Q1 è un apparecchio per interni adatto per installazione a soffitto e a parete. Garantisce il minimo impatto visivo, è completamente orientabile a 360° in orizzontale e in verticale e disponibile in più varianti ottiche.

HIGH POWER WITH DRIVER INCLUDED.

A high-performance, metallic dust-painted projector: Q1 is an indoor luminaire installable on ceilings, walls. It guarantees a minimal visual impact and is completely orientable up to 360° both horizontally and vertically. It is also available with different lens.



CODE COMPOSITION

1012	3	S	E	ND
light colour				
27	2700K			
30	3000K			
40	4000K			
lens				
12	12°			
24	24°			
38	38°			
finishing				
WH	white			
BL	black			

example of code composition 1012 **WH** 3 **S** **24** **E** **30** **ND**

TECHNICAL FEATURES

Code	1012 XX
Type	Projector ± 360° / ± 90°
Material	Aluminum
Finishing	White I Black
Weight	0.8 Kg
Mounting	Wall and ceiling
IP rating	IP40
Insulation class	III
Control gear	Constant current electronic driver on board (included)
Lamp type	LED 350 mA
Lamp wattage	1 x 12W
Luminous efficacy	1550 lm - 3000K
Light distribution	Beam 24° Beam 12° I 38° (on request)
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Voltage connection	220-240V · 50/60Hz
CRI	>90
Emergency	On request
Energy efficiency class	A++
Note	On request available dimmable PUSH or DALI.





Q1
Private Villa - Austria

222	The Tube
226	The Line
230	The Dark
232	Mikado

Suspended

STAND ALONE

THE TUBE




The Tube è una lampada a sospensione dal design minimale, il suo diametro di soli 15 mm la rendono estremamente essenziale, discreta, elegante nelle forme. Ha un output luminoso in grado di valorizzare ogni dettaglio, disponibile in diverse colorazioni.

È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.

The Tube is a pendant light with a minimal design. Its diameter of only 15 mm makes it extremely clean-cut, discrete and elegant in shape. It has a light output that can enhance every detail and is available in different colours.

It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.

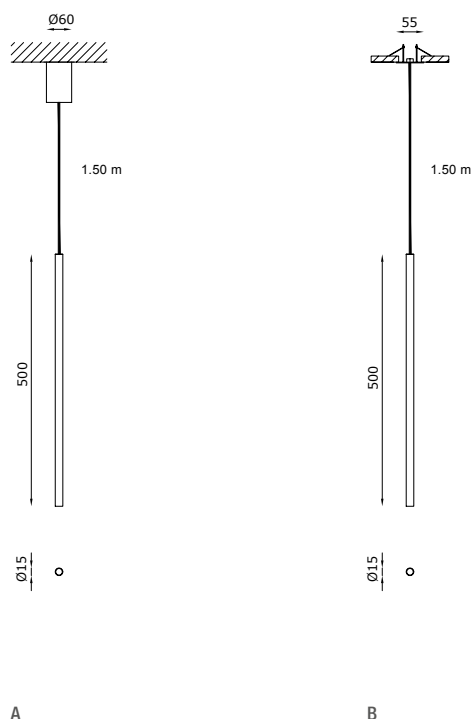

CODE COMPOSITION

1131	4 S 00 E _ ND		
		light colour	
		27	2700K
		30	3000K
		finishing	
		WH	white
		BL	black
		CP	chromed
		A1	champagne
		A2	rose gold

1132	4 S 00 E _ ND		
		light colour	
		27	2700K
		30	3000K
		finishing	
		WH	white
		BL	black
		CP	chromed
		A1	champagne
		A2	rose gold

TECHNICAL FEATURES

Code	1131 XX (fig. A)	1132 XX (fig. B)
Type	Suspension lamp 	Suspension lamp
Material	Aluminum	Aluminum
Finishing	White Black Champagne Rose Gold	White Black Champagne Rose Gold
Weight	0.8 Kg	0.8 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Dimmable electronic driver on board (included)	Dimmable electronic driver, remote installation (included)
Cut out for plasterboard	-	Ø 45 mm
Lamp type	LED 	LED
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	360 lm - 3000K	360 lm - 3000K
Light distribution	Narrow beam	Narrow beam
Fitting	-	-
Light colour	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A++
Note	Black ceiling box with driver on board. Black silicon cable (L 1.5 m). On request different lenght.	Black recessed canopy with remote driver. Black silicon cable (L 1.5 m). On request different lenght.

example of code composition

1131 WH 4 S 00 E 27 ND

The Tube
SUPERFUTUREDESIGN®






THE LINE



matt white RAL 9016 painted



matt black RAL 9005 painted

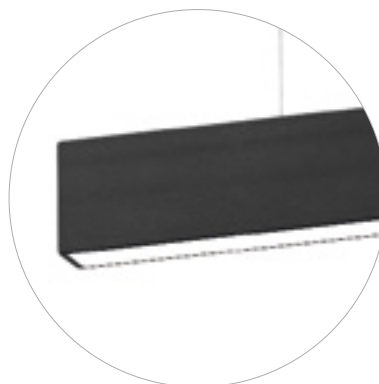


The Line è una lampada a sospensione lineare per ambienti interni. Dalla forma essenziale e minimale che crea una luce diffusa e omogenea nello spazio.

È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.


The Line is a linear pendant light for interiors.

With a clean-cut and minimal design it creates a diffused and homogeneous light in the space.

It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.

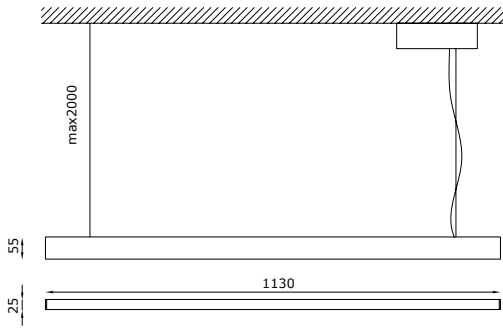

A

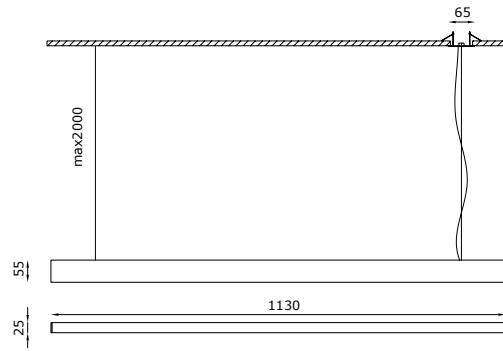

B

CODE COMPOSITION

1145 _ 4 S 00 E _ ND			
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>finishing</i>	
		WH	white
		BL	black

1146 _ 4 S 00 E _ ND			
		<i>light colour</i>	
		27	2700K
		30	3000K
		40	4000K
		<i>finishing</i>	
		WH	white
		BL	black

example of code composition

1145 WH 4 S 00 E 30 ND

TECHNICAL FEATURES


Code	1145 XX (fig. A)	1146 XX (fig. B)
Type	Suspension lamp 	Suspension lamp
Material	Aluminum	Aluminum
Finishing	White RAL 9016 Black RAL 9005	White RAL 9016 Black RAL 9005
Weight	3 Kg	3 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP20	IP20
Insulation class	III	III
Control gear	Electronic driver on board (included)	Electronic driver, remote installation (included)
Cut out for plasterboard	-	Ø 55 mm
Lamp type	LED 	LED
Lamp wattage	1 x 24W	1 x 24W
Luminous efficacy	3000 lm - 3000K	3000 lm - 3000K
Light distribution	Opal screen diffused	Opal screen diffused
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
UGR	<29	<29
Emergency	-	-
Energy efficiency class	A++	A++
Note	Ceiling box with driver on board. Textile cable (L max 2 m).	Recessed canopy with remote driver. Textile cable (L max 2 m).



The Line
SUPERFUTUREDESIGN*



THE DARK

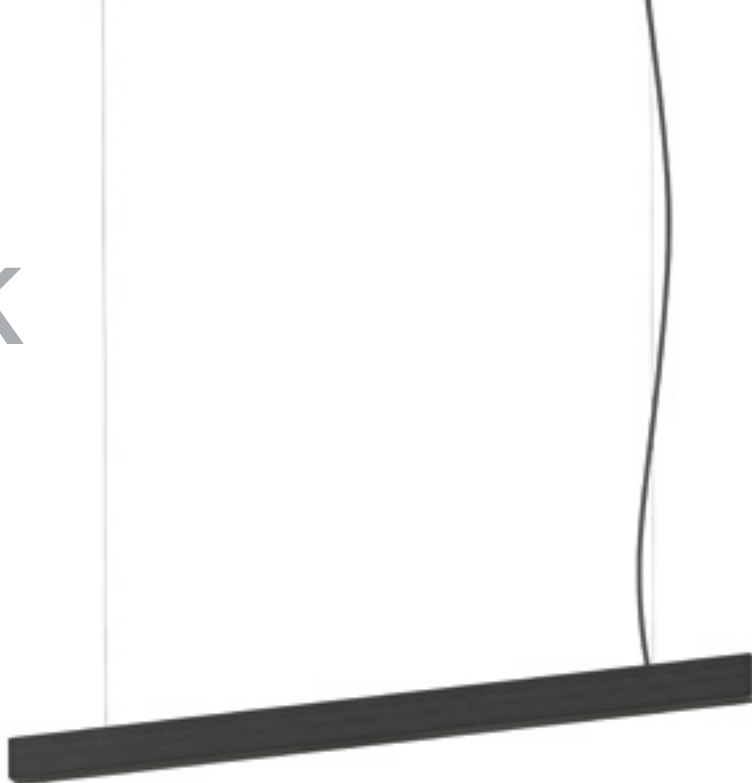

matt black painted

SCHERMO FUMÈ PER UN LOOK TOTAL BLACK QUANDO È SPENTO.



The Dark è una lampada a sospensione lineare per ambienti interni. Il suo design ne enfatizza il nome proponendosi per essere un punto luce **completamente nero grazie alla presenza di uno schermo fumè**, che mette in evidenza la sua capacità luminosa solo quando è acceso. Disponibile anche con schermo satinato. È una lampada dalla forma essenziale e minimale che crea una luce diffusa e omogenea nello spazio.

È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.

FUMÈ SHADE FOR A TOTAL BLACK LOOK WHEN TURNED OFF.

*The Dark is a linear pendant light for interiors. Its design epitomises its name proposing itself as a **completely black light point thanks to a smoked shade** which shows off its light capacity only when it is switched on. Also available with satin-finished shade. It is a light with a clean-cut minimal shape which creates a diffused and homogeneous light in the space.*

It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.

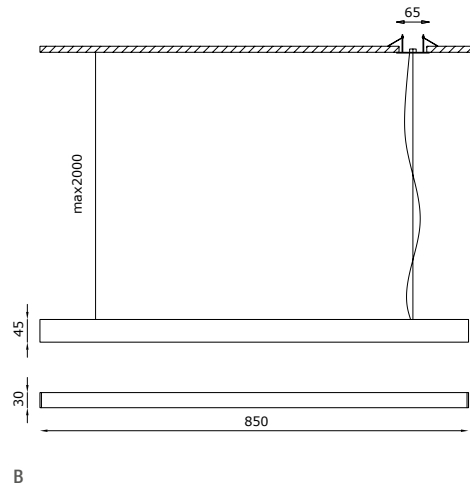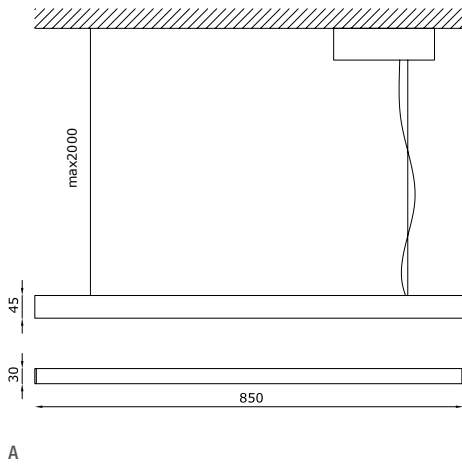

CODE COMPOSITION

1140 BL 4 S 00 E _ ND

light colour

27 2700K
30 3000K
40 4000K

1141 BL 4 S 00 E _ ND

light colour

27 2700K
30 3000K
40 4000K

example of code composition 1140 BL 4 S 00 E 30 ND

TECHNICAL FEATURES

Code	1140 XX (fig. A)	1141 XX (fig. B)
Type	Suspension lamp 	Suspension lamp 
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	2 Kg	2 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant voltage LED driver on board (included)	Constant voltage LED driver, remote installation (included)
Cut out for plasterboard	-	Ø 55 mm
Lamp type	LED 	LED 
Lamp wattage	1 x 25W	1 x 25W
Luminous efficacy	1800 lm	1800 lm
Light distribution	Opal diffused screen fumè	Opal diffused screen fumè
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A++
Note	Black ceiling box with driver on board. Rubber cable (L max 2 m).	Black recessed canopy with remote driver. Rubber cable (L max 2 m).

OPTIONAL ACCESSORIES

product code	optional code	description	info
1140 XX / 1141 XX	VTR0000019	Opal white diffused screen	-

MIKADO



black anodized

ALTA POTENZA DI LUCE IN 17 mm DI DIAMETRO.


Mikado è una lampada tubolare a sospensione, dal design minimale per ambienti interni. Il suo diametro di soli 17 mm la rendono estremamente discreta nelle forme. Nonostante le sue ridotte dimensioni è una lampada in grado di emettere quasi 5000 lm, in soli 1.5 m di lunghezza.

È disponibile una versione con driver incluso nel rosone e una versione con rosone a scomparsa in battuta con driver remoto.


HIGH POWER OF LIGHT IN A DIAMETER OF 17 mm.

Mikado is a tubular pendant light with a minimal design for interiors. Its diameter is only 17 mm making it extremely discrete. In spite of its small size, it is a light which can emit almost 5000 lm, with a length of only 1.5 m.

It is available in a version with driver included in the ceiling-rose and a version with recessed ceiling-rose with remote driver.

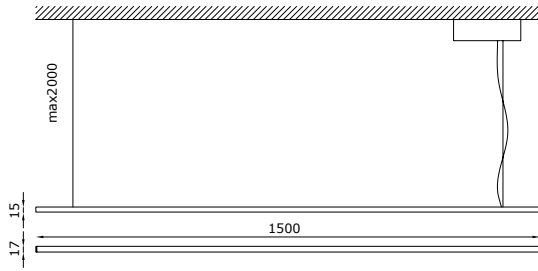

A

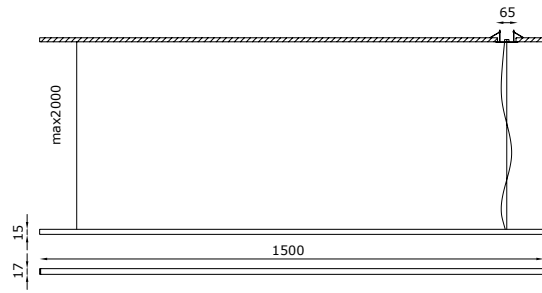

B

CODE COMPOSITION

1135 BL 4 S 00 E _ ND

light colour

27 2700K
30 3000K
40 4000K

1136 BL 4 S 00 E _ ND

light colour

27 2700K
30 3000K
40 4000K

example of code composition

1135 BL 4 S 00 E 30 ND

TECHNICAL FEATURES

Code	1135 XX (fig. A)	1136 XX (fig. B)
Type	Suspension lamp 	Suspension lamp 
Material	Aluminum	Aluminum
Finishing	Black	Black
Weight	1.5 Kg	1.5 Kg
Mounting	Ceiling mounting	Ceiling mounting
IP rating	IP40	IP40
Insulation class	III	III
Control gear	Constant voltage LED driver on board (included)	Constant voltage LED driver, remote installation (included)
Cut out for plasterboard	-	Ø 55 mm
Lamp type	LED 	LED 
Lamp wattage	1 x 30W	1 x 30W
Luminous efficacy	3200 lm - 3000K	3200 lm - 3000K
Light distribution	Opal diffused screen satin	Opal diffused screen satin
Fitting	-	-
Light colour	White 3000K White 2700K 4000K (on request)	White 3000K White 2700K 4000K (on request)
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A++
Note	Black ceiling box with driver on board. Textile cable (L max 2 m).	Black recessed canopy with remote driver. Textile cable (L max 2 m).



Mikado
SUPERFUTUREDESIGN*



Outdoor



Outdoor stand alone Outdoor stand alone Outdoor stand alone Outdoor stand alone

242	Genius Basic Naked IP65
244	Genius Naked IP65
246	F40
250	H2NOT
254	H2STOP

Recessed

STAND ALONE

GENIUS BASIC NAKED IP65






IL PIÙ COMPATTO DA INSTALLARE SU QUALSIASI MATERIALE.


La versione da esterni di Genius Basic Naked vive ora in Genius Basic Naked IP65. Questo apparecchio da incasso a scomparsa totale per esterni, è ingegnerizzato per raggiungere un grado di protezione IP65. Essendo una variante della versione Naked, questo prodotto estende il concetto di totale integrazione superficiale a qualsiasi materiale e contesto ed inoltre aggiunge le potenzialità tipiche della linea Basic. Genius Basic Naked IP65 è un prodotto molto compatto, sintesi della ricerca Buzzi & Buzzi in termini di versatilità, efficienza ed affidabilità: flusso luminoso da 540 lm, installabile in soli 80 mm di intercapedine, con protezione IP65. Può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con spessore da 12 mm a 30 mm. Tipicamente Genius, unica parte visibile è il foro luce di 20 mm, da cui è estraibile la sorgente LED grazie a un sistema che facilita la sostituzione del corpo illuminante, senza necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

THE MOST COMPACT TO INSTALL ON ANY MATERIAL.

The outdoors version of Genius Basic Naked is now available in the Basic Naked IP65 model. This totally recessed luminaire for outdoor use has been engineered to achieve an IP65 protection level. Since it is a new version of the Naked model, this product extends the concept of total surface integration to any material and contexts and also achieves the potentials typical of the Basic line.

Genius Basic Naked IP65 is a very compact product, a synthesis of Buzzi & Buzzi research in terms of versatility, efficiency and reliability: a light flow of 540 lm, installable in a cavity of only 80 mm (3.15"), with IP65 protection. It can also be installed on wood, cement, mirror, marble and industrial modules with a thickness of from 12 mm (0.47") to a maximum of 30 mm (1.18"). Typically Genius, the only visible part is the light emission hole measuring 20 mm (0.79"), from which the LED light source can be pulled out thanks to a system which makes it easy to replace the light source, so there is no need for any inspection hatch, nor for invasive maintenance.

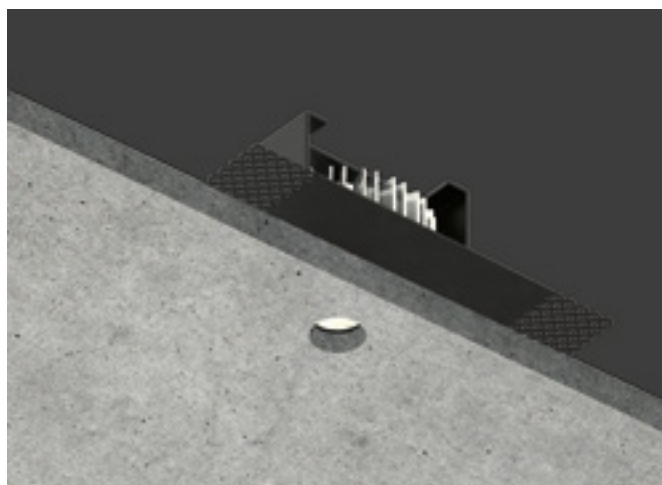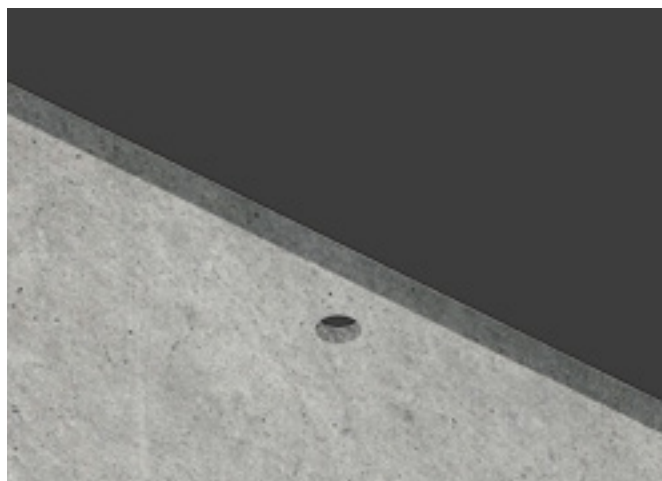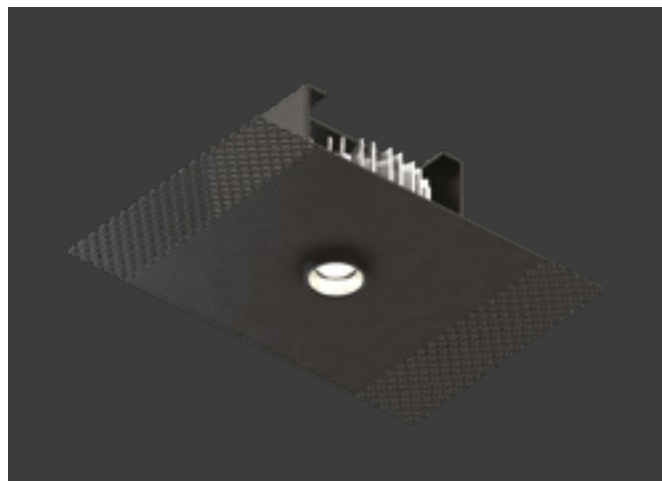



CODE COMPOSITION

2071 BL 4 R 24 E _ WD

light colour

27	2700K
30	3000K
40	4000K

2072 BL 4 R 24 E _ ND

light colour

27	2700K
30	3000K
40	4000K

example of code composition 2071 BL 4 R 24 E **30** WD


TECHNICAL FEATURES

Code	2071 XX	2072 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA  Vf: 6.5 VDC	LED 700 mA 
Lamp wattage	1 x 4.5W	1 x 4.5W
Luminous efficacy	540 lm - 3000K	540 lm - 3000K
Light distribution	Wide beam 24°	Wide beam 24°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 30 mm deep.	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 30 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2071 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 2071 XX - 700 mA


GENIUS NAKED IP65

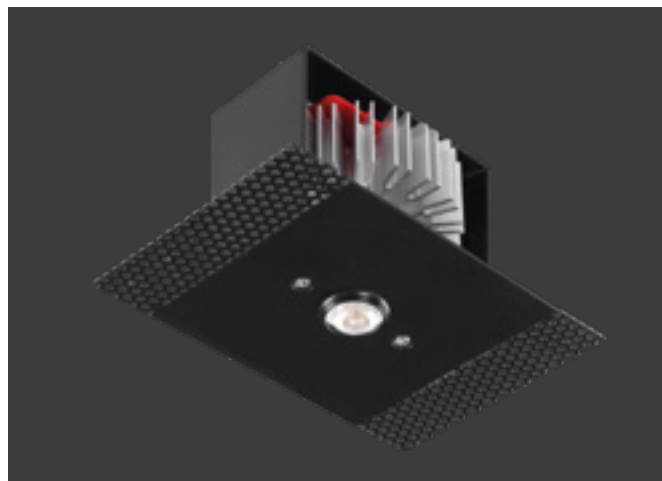

UN GENIUS NUDO ADATTO PER QUALSIASI SUPPORTO E MATERIALE.

Genius Naked IP65 è un apparecchio a scomparsa totale a soffitto, adatto per esterni e ambienti molto umidi, grazie all'alto grado di protezione IP65. Questo prodotto estende il concetto di totale integrazione superficiale, tipico di Buzzi & Buzzi, a qualsiasi materiale e contesto: infatti può essere installato su qualsiasi superficie: legno, cemento, specchio, marmo, moduli industriali con uno spessore da 12 mm a massimo 20 mm.


Unica parte visibile è il foro di soli 20 mm, mentre la parte elettrica è estraibile direttamente dal foro luce, grazie alla meccanica push-pull, che facilita la sostituzione della sorgente LED, senza la necessità di alcuna botola di ispezione e tantomeno di interventi invasivi in caso di manutenzione.

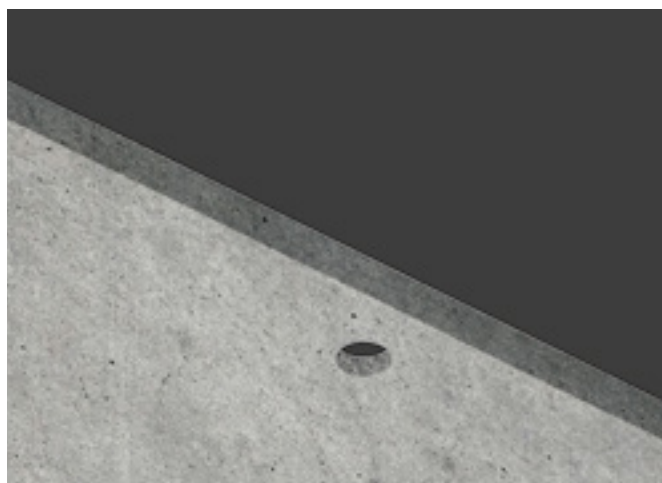


A BARE GENIUS SUITABLE FOR ANY SUPPORT AND MATERIAL.

Genius Naked IP65 is a totally recessed ceiling-mounted luminaire, suitable for use outdoors and in very damp environments, thanks to its high IP65 protection level.

This product extends the concept of total surface integration, typical of Buzzi & Buzzi, to any material and context: in fact, it can also be installed on wood, cement, mirror, marble and industrial modules with a thickness of from 12 mm (0.47") to a maximum of 20 mm (0.79"). The only visible part is the light emission hole measuring only 20 mm (0.79"), while the electrical part can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out, with no need for any inspection hatch, nor for invasive maintenance operations.

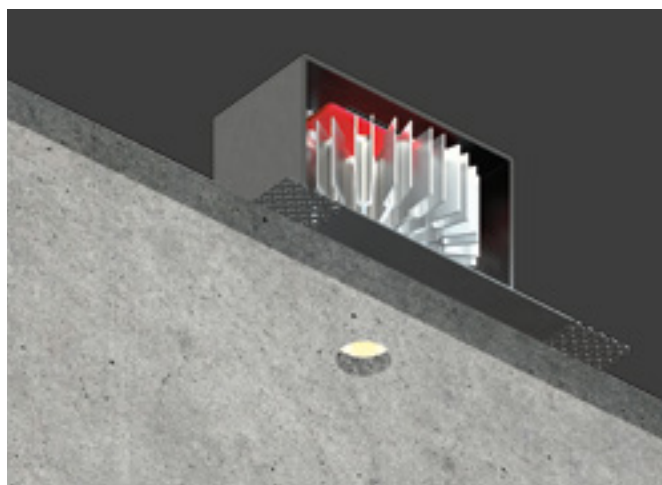



CODE COMPOSITION

2075 BL 4 R 40 E _ WD

light colour

27	2700K
30	3000K
40	4000K

2076 BL 4 R 40 E _ ND

light colour

27	2700K
30	3000K
40	4000K

example of code composition 2075 BL 4 R 40 E **30** WD

TECHNICAL FEATURES

Code	2075 XX	2076 XX
Type	Downlight 90° 	Downlight 90° 
Material	Aluminum I Steel	Aluminum I Steel
Finishing	Black	Black
Weight	0.65 Kg	0.65 Kg
Mounting	Ceiling recessed	Ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver and inverter (included)
Lamp type	LED 700 mA  Vf: 11.5 VDC	LED 700 mA 
Lamp wattage	1 x 8.5W	1 x 8.5W
Luminous efficacy	1000 lm - 3000K	1000 lm - 3000K
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 20 mm	Ø 20 mm
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	>90	>90
Emergency	-	1 hour
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep.	On request available dimmable PUSH or DALI, remote installation. Suitable for installation on surfaces max 20 mm deep.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2075 XX	H8700.E	Constant current electronic driver. Remote installation	Suitable for n°1 or n°3 code 2075 XX - 700 mA

F40




matt white painted

MINI INCASSO CON GRADO DI PROTEZIONE IP44 E IP65.

La luce scaturisce da un punto nella parete, pura e delicata si diffonde in modo omogeneo nello spazio, avvolgendo tutto l'ambiente. F40, un incasso da esterni per installazione a parete e soffitto di cartongesso disponibile con finitura bianca e dotato di lente in policarbonato extra trasparente, dà vita a punti luminosi unici e suggestivi.

MINI RECESSED LUMINAIRE WITH IP44 AND IP65 PROTECTION RATING.

The light comes from a single point on the wall and, pure and delicate, uniformly scatters around, embracing the entire environment. F40, a recessed outdoor luminaire installable on plasterboard walls and ceilings, is available with white finishings. Provided with an ultra-transparent polycarbonate lens, it gives life to unique and suggestive light spots.



CODE COMPOSITION

1021 WH 2 R 14 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K

2061 WH 2 R 14 E _ WD	<i>light colour</i>	
	27	2700K
	30	3000K

example of code composition 1021 WH 2 R 14 E 30 WD

TECHNICAL FEATURES

Code	1021 XX	2061 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.06 Kg	0.06 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP44	IP65
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Constant current electronic driver (not included)
Cut out for plasterboard	Ø 32 mm	Ø 32 mm
Lamp type	LED Vf: 3 VDC	LED Vf: 3 VDC
Lamp wattage	1W - 350mA 2W - 500mA	1W - 350mA 2W - 500mA
Luminous efficacy	75 lm - 3000K - 350mA 170 lm - 3000K - 500mA	75 lm - 3000K - 350mA 170 lm - 3000K - 500mA
Light distribution	Narrow beam 14°	Narrow beam 14°
Fitting	-	-
Light colour	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	>90
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI, remote installation.	On request available dimmable PUSH or DALI, remote installation.

OPTIONAL ACCESSORIES

product code	optional code	description	info
1021 XX / 2061 XX	H8350	Constant current electronic driver	Suitable for n°1 code 1021 XX / 2061 XX - 350 mA
	H8500.B	Constant current electronic driver. Remote installation	Suitable for n°5 code 1021 XX / 2061 XX - 500 mA
	H8500.C	Constant current electronic driver. Remote installation	Suitable for n°2 code 1021 XX / 2061 XX - 500 mA





H2NOT




matt white painted

INCASSO CON GRADO DI PROTEZIONE IP65.

Un'illuminazione che regala fascino ad ambienti che hanno bisogno di un grado di protezione contro l'acqua: H2NOT è un apparecchio in alluminio da esterni ad incasso per installazione a soffitto e a parete, ed è l'alleato perfetto per garantire la giusta luminosità di SPA, wellness club o spazi privati dove l'acqua e la luce sono le vere protagoniste. Le caratteristiche di impermeabilità all'acqua unite alla verniciatura a polveri ad alta resistenza lo rendono uno strumento ideale per gli ambienti umidi.

RECESSED WITH IP65 PROTECTION RATING.

An illumination capable of giving the right charm to environments which need protection from water: H2NOT is a recessed outdoor luminaire in aluminium installable on ceilings and walls and available with white finishings. It is the perfect ally to guarantee the correct lighting in SPAs, wellness clubs or private spaces where water and light are the real protagonists. Its waterproof characteristics, combined with its resistance dust painting, make H2NOT ideal for moist places.



CODE COMPOSITION

2041 WH 2 R 40 E _ WD

light colour

27	2700K
30	3000K
40	4000K

2044 WH 4 R 40 E 98 WD

example of code composition 2041 WH 2 R 40 E 30 WD

TECHNICAL FEATURES


Code	2041 XX	2044 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90° 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.25 Kg	0.25 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote dimmable constant current electronic driver** (not included)
Cut out for plasterboard	Ø 75 mm	Ø 75 mm
Lamp type	LED 500 mA  Vf: 18 VDC	LED 350 mA  Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation.

**H2NOT code 2044 XX requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2041 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 2041 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 2041 XX - 500 mA
2044 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 2044 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 2044 XX

H2NOT



CODE COMPOSITION

2042 WH 6 R 00 E 00 WD

2043 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	2042 XX	2043 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90° 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.15 Kg	0.15 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	Ø 75 mm	Ø 75 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A	A
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
2042 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
2043 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V



H2STOP




matt white painted

INCASSO CON GRADO DI PROTEZIONE IP65.

H2STOP è un apparecchio in alluminio da esterni ad incasso, pensato per l'installazione in ambienti umidi come bagni o SPA. Grazie alle linee pulite del suo design minimale, sa fondersi negli ambienti, diventando un immancabile alleato di ogni progettista. Caratterizzato da una verniciatura a polveri ad alta resistenza con finitura bianca.

RECESSED WITH IP65 PROTECTION RATING.

H2STOP is a recessed outdoor luminaire in aluminium designed for being installed in moist places such as bathrooms and SPAs. Thanks to the neat lines of its minimal design, it mingles with the environment, becoming the best ally for every architect or designer. It is characterized by a strongly resistance dust painting with white finishings.



CODE COMPOSITION

2051 WH 2 R 40 E _ WD

light colour

27	2700K
30	3000K
40	4000K

2054 WH 4 R 40 E 98 WD

example of code composition 2051 WH 2 R 40 E 30 WD


TECHNICAL FEATURES

Code	2051 XX	2054 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.25 Kg	0.25 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	III
Control gear	Constant current electronic driver (not included)	Remote dimmable constant current electronic driver** (not included)
Cut out for plasterboard	75 x 75 mm	75 x 75 mm
Lamp type	LED 500 mA Vf: 18 VDC	LED 350 mA Vf: 17 VDC
Lamp wattage	1 x 9W	1 x 6W
Luminous efficacy	1125 lm - 3000K	600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°	Wide beam 40°
Fitting	-	-
Light colour	White 3000K White 2700K I 4000K (on request)	Dimming range 1800/3000K
Voltage connection	By driver (optional)	By driver (optional)
CRI	>90	95
Emergency	-	-
Energy efficiency class	A++	A++
Note	On request available dimmable PUSH or DALI.	On request available dimmable PUSH or DALI, remote installation. **H2STOP code 2054 XX requires dimming: amplitude (AM) IEEE1789-2015 dim to warm wide range input voltage.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2051 XX	H8500.E	Constant current electronic driver	Suitable for n°2 code 2051 XX - 500 mA
	H8500.B	Constant current electronic driver	Suitable for n°1 code 2051 XX - 500 mA
2054 XX	H8350DA.AM	Dimming: amplitude (AM) DALI	Suitable for n°2 code 2054 XX
	H8350PH.AM	Dimming: amplitude (AM) PUSH	Suitable for n°2 code 2054 XX

H2STOP



CODE COMPOSITION

2052 WH 6 R 00 E 00 WD


2053 WH 6 R 00 E 00 WD

TECHNICAL FEATURES

Code	2052 XX	2053 XX
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90° 
Material	Aluminum	Aluminum
Finishing	White	White
Weight	0.2 Kg	0.2 Kg
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP65	IP65
Insulation class	III	I
Control gear	Electronic transformer (not included)	-
Cut out for plasterboard	75 x 75 mm	75 x 75 mm
Lamp type	QR CB 51 	QPAR 16 
Lamp wattage	50W max	50W max
Luminous efficacy	-	-
Light distribution	-	-
Fitting	GU5.3	GU10
Light colour	-	-
Voltage connection	By driver (optional)	220-240V · 50/60Hz
CRI	-	-
Emergency	-	-
Energy efficiency class	A	A
Note	-	-

OPTIONAL ACCESSORIES

product code	optional code	description	info
2052 XX	H8060.LED	Dimmable electronic transformer	Max watt 60W Volts · Hz 230/12V · 50/60Hz
	0008KIT	Kit LED dimmable	Bulb 7W · 12V
2053 XX	0009KIT	Kit LED dimmable	Bulb 6W · 220-240V

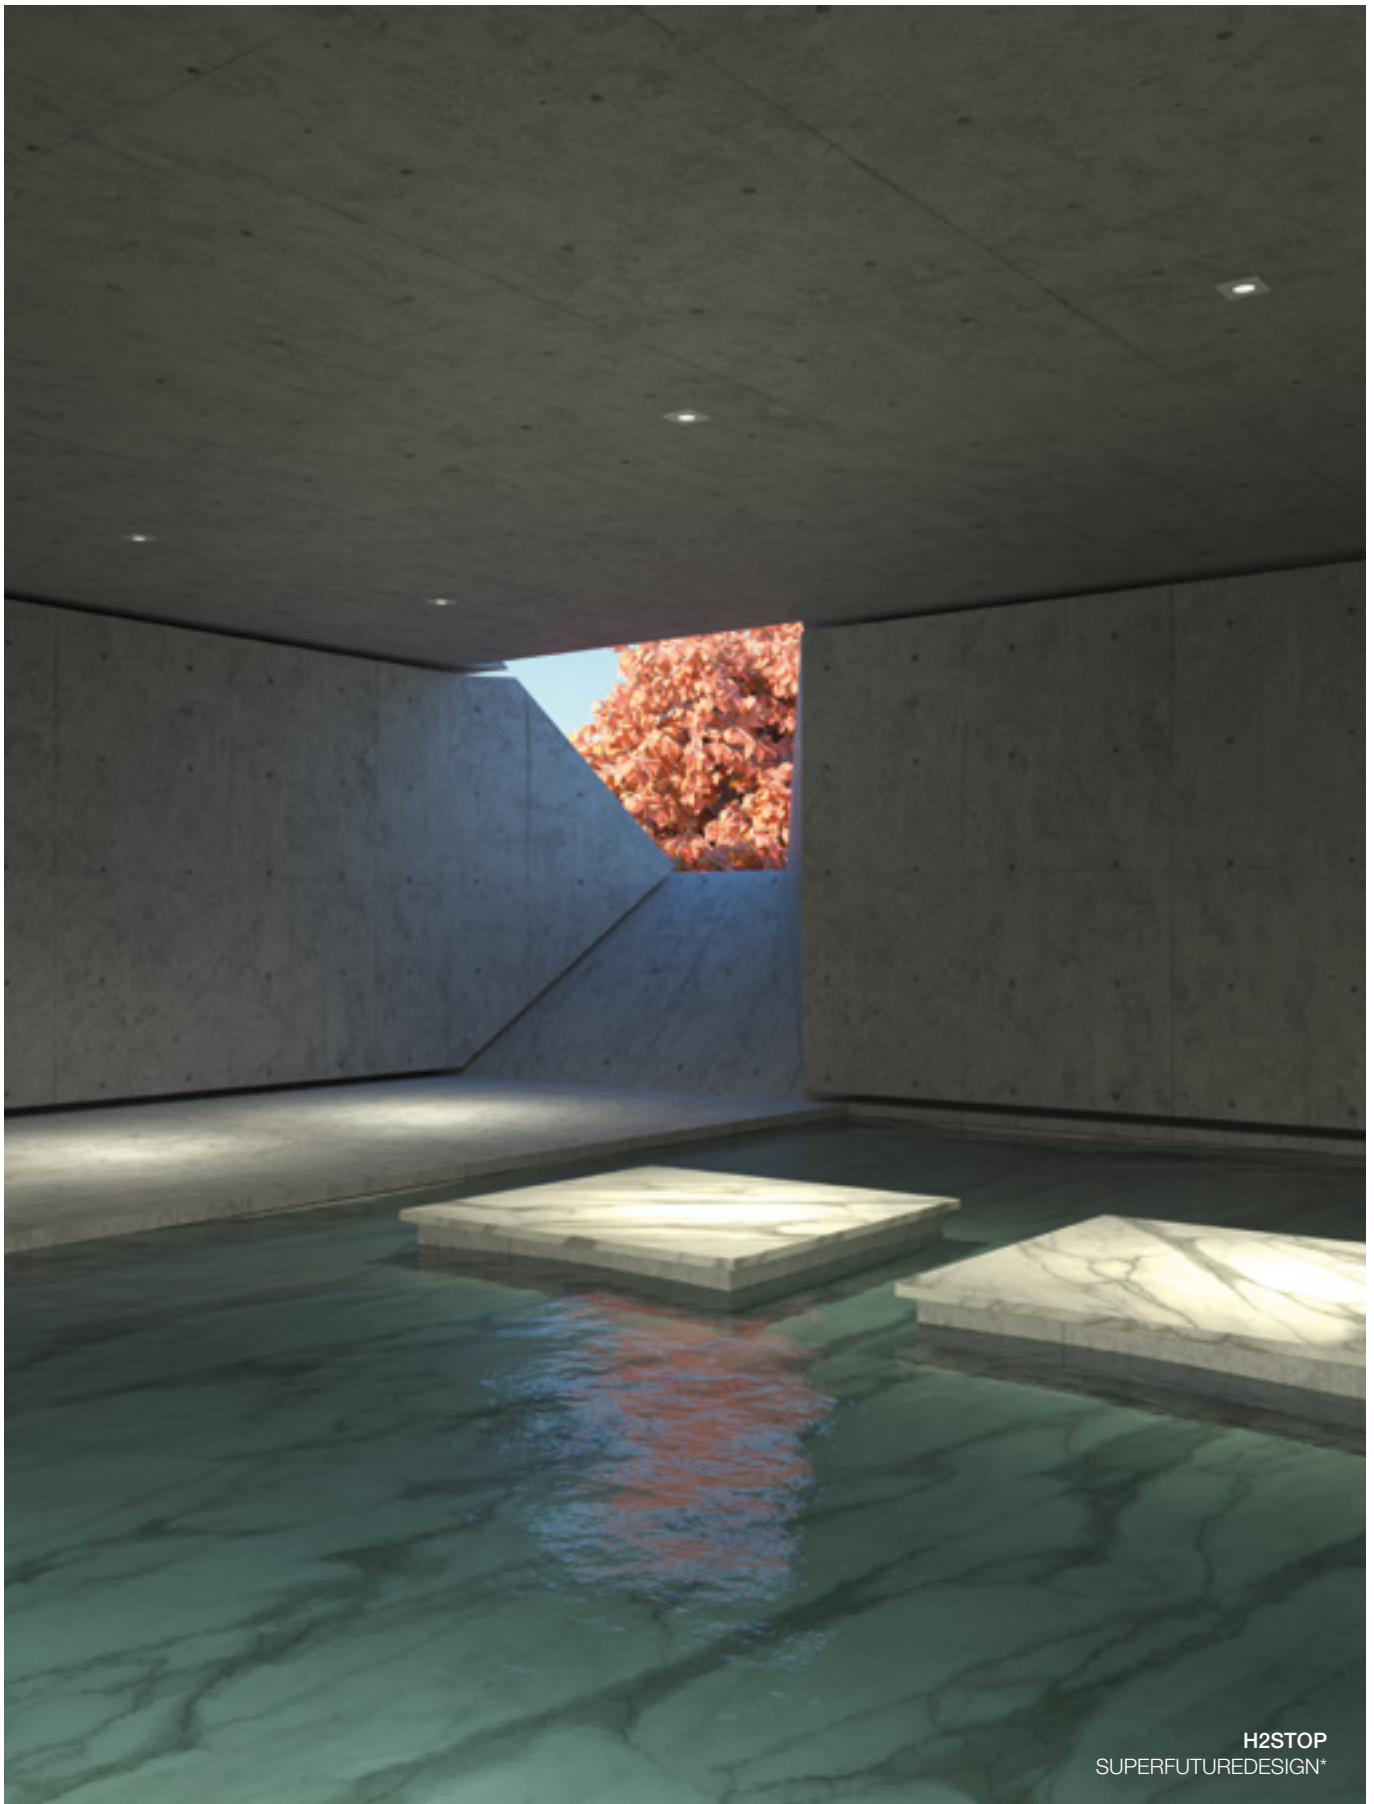

H2STOP
SUPERFUTUREDESIGN*

260	S1
264	S1G
268	DB9
272	DB10
276	DB11

Surface

STAND ALONE

S1




matt black painted

PROIETTORE MULTI DIREZIONALE IP65.

S1 è un proiettore per esterni adatto per installazioni a superficie. Grazie ad una piastra di fissaggio dalle forme discrete ed ad un'asta di 80 mm, il proiettore può scorrere e trovare la giusta posizione e inclinazione grazie alla possibilità di rotazione sull'asse orizzontale di circa 360°. Versatile e minimale è in grado di valorizzare con il suo fascio puntuale particolari dettagli degli spazi esterni.

MULTI-DIRECTIONAL IP65 PROJECTOR.

S1 is an outdoor projector suitable for surface installations. Thanks to a discreetly shaped fixing plate and an 80 mm rod, the projector can slide and find the right position and inclination thanks to the possibility of rotation on the horizontal axis of about 360°. Versatile and minimalist, it is able to enhance particular details of outdoor spaces with its precise beam.



CODE COMPOSITION

2083 BL 4 S _ E _ WD

light colour

27	2700K
30	3000K

lens

22	22°
50	50°

example of
code composition

2083 BL 4 S 22 E 30 WD

TECHNICAL FEATURES

Code	2083 XX
Type	Projector ± 360° 
Material	Aluminum
Finishing	Black
Weight	0.4 Kg
Mounting	Wall lamp
IP rating	IP65
Insulation class	III
Control gear	Constant current electronic driver (not included)
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	Watertight connection device: useful to block the penetration of humidit caused by the phenomenon of the backwash of the depression created in the lighting fixtures during the cooling process of the lamp.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2083 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 2083 XX - 500 mA



S1
Private Villa - Geom. Luca Albani




S1
Vista Vision – Arch. Simonetti – Milan

S1G



matt black painted

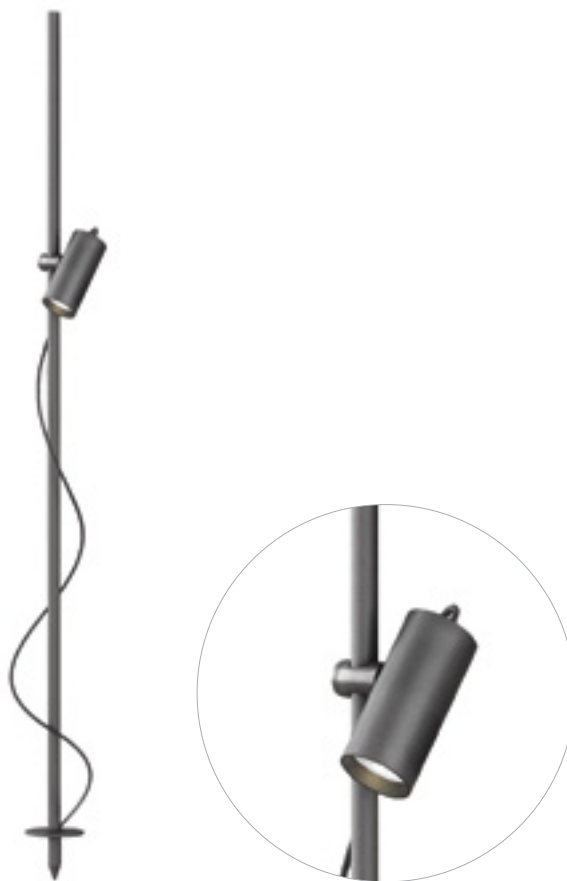


PROIETTORE A PICCHETTO IP65 MULTI DIREZIONALE.

S1G è un proiettore per ambienti esterni adatto per installazioni direttamente nel terreno, grazie ad un picchetto e ad una piastra nella parte terminale. Con un'estensione massima di 80 cm il proiettore può essere installato a qualsiasi altezza. Orientabile a 360°, è perfetto per valorizzare essenze o percorsi all'interno di spazi verdi.

IP65 MULTI-DIRECTIONAL STAKE PROJECTOR.

S1G is an outdoor projector that can be installed directly in the ground thanks to a stake and a plate at the end. With a maximum extension of 80 cm the projector can be installed at any height. Adjustable at 360°, it is perfect to enhance essences or paths in green areas.

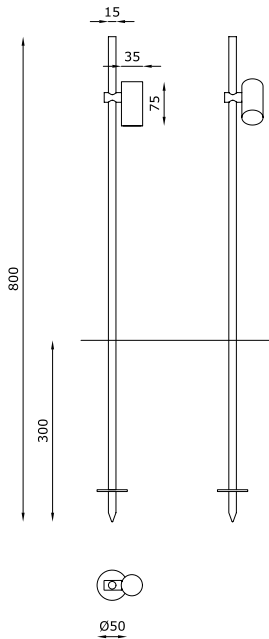

CODE COMPOSITION

2082 BL 4 S _ E _ WD

light colour

27 2700K

30 3000K

lens

22 22°

50 50°

example of
code composition

2082 BL 4 S **22** E **30** WD

TECHNICAL FEATURES

Code	2082 XX
Type	Projector ± 360° 
Material	Aluminum
Finishing	Black
Weight	-
Mounting	Ground lamp
IP rating	IP65
Insulation class	III
Control gear	Constant current electronic driver (not included)
Lamp type	LED 500 mA Vf: 11 VDC
Lamp wattage	1 x 6W
Luminous efficacy	520 lm - 3000K
Light distribution	Beam 22° Beam 50° (on request)
Fitting	-
Light colour	White 3000K White 2700K (on request)
Voltage connection	By driver (optional)
CRI	>90
Emergency	-
Energy efficiency class	A++
Note	Watertight connection device: useful to block the penetration of humidit caused by the phenomenon of the backwash of the depression created in the lighting fixtures during the cooling process of the lamp.

OPTIONAL ACCESSORIES

product code	optional code	description	info
2082 XX	H8500.E	Constant current electronic driver. Remote installation	Suitable for n°3 code 2082 XX - 500 mA



S1G
SUPERFUTUREDESIGN®



DB9



matt white painted



silver

LAMPADA DA ESTERNO IP65 E IK05.


Una presenza discreta, una luce decisa: DB9, apparecchio per esterni a parete a mono e bi-emissione, disponibile con finitura bianca o silver, lo rendono un prodotto dalle performance uniche, in grado di integrarsi perfettamente nelle superfici e di diventare protagonista. Un'anima versatile per un prodotto dalla luce inconfondibile.

DB9 ha un corpo in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

IP65 AND IK05 LUMINAIRE FOR OUTDOORS.

A discreet presence, a defined light: technology and design make DB9, an outdoor luminaire with mono or bi-emission, installable on walls and available with white or silver finishings. DB9 is a product providing unique and unforgettable performances that perfectly integrates itself with the surfaces it is applied to, becoming the main protagonist of that environment. A versatile soul for a product with an unmistakable light.

DB9 has an internal body in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.



CODE COMPOSITION

201	3 S 00 E _ WD	<i>light colour</i>	
		30	3000K
		40	4000K
		<i>finishing</i>	
2013	6 S 00 E 00 WD	WH	white
		SL	silver
		<i>type</i>	
		1	mono direction light
2013	6 S 00 E 00 WD	2	double direction light
		<i>finishing</i>	
		WH	white
		SL	silver

example of code composition

2011 WH 3 S 00 E 30 WD

TECHNICAL FEATURES

Code	2011 XX / 2012 XX	2013 XX
Type	Wall lamp	Wall lamp
Material	Aluminum	Aluminum
Finishing	White I Silver	White I Silver
Weight	1.1 Kg	1.1 Kg
Mounting	Wall mounting	Wall mounting
IK protection degree	IK 05	IK 05
IP rating	IP65	IP65
Insulation class	I	I
Control gear	No transformer is required, direct operation at 220-240V	-
Lamp type	LED 	QT-14 
Lamp wattage	Mono: 1 x 4W Double: 2 x 4W	60W
Luminous efficacy	Mono: 400 lm - 3000K Double: 2 x 400 lm - 3000K	-
Light distribution	Wide beam 120°	-
Fitting	-	G9
Light colour	White 3000K White 4000K (on request)	-
Voltage connection	220-240V · 50/60Hz	220-240V · 50/60Hz
CRI	>90	-
Emergency	-	-
Energy efficiency class	A++	A
Note	Mono direction light 	Double direction light 



DB9
SUPERFUTUREDESIGN*



DB10



matt white painted



silver

LAMPADA DA ESTERNO IP65 E IK05.


Estetica e tecnologia avanzata si fondono e danno vita a DB10, apparecchio per esterni a parete a mono o biemissione, disponibile con finitura bianca o silver: un'applicazione discreta ed elegante, che valorizza facciate, percorsi e punti di accesso. Un prodotto che sa come dipingere emozioni con la luce.

DB10 ha un corpo in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

IP65 AND IK05 LUMINAIRE FOR OUTDOORS.

Aesthetics and technology combined give life to DB10, an outdoor luminaire with mono or bio-emission installable on walls. Available with white or silvery finishings, it has a discreet and elegant presence which valorizes facades, paths and entrances. A product capable of drawing emotions with light.

DB10 has an internal body in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.

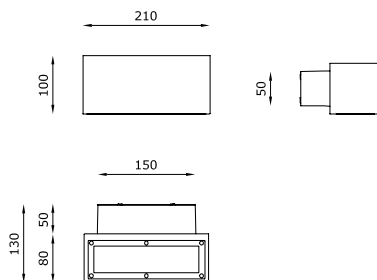

CODE COMPOSITION

202 - 2 S 00 E _ ND	
<i>light colour</i>	
27	2700K
30	3000K
40	4000K
<i>finishing</i>	
WH	white
SL	silver
<i>type</i>	
1	mono direction light
2	double direction light

202 - 6 S 00 E 00 ND	
<i>finishing</i>	
WH	white
SL	silver
<i>type</i>	
3	mono direction light
4	double direction light

example of code composition

2021 WH 2 S 00 E 30 ND

TECHNICAL FEATURES

Code	2021 XX / 2022 XX		2023 XX / 2024 XX	
Type	Wall lamp		Wall lamp	
Material	Aluminum		Aluminum	
Finishing	White Silver		White Silver	
Weight	2.2 Kg		2.2 Kg	
Mounting	Wall mounting		Wall mounting	
IK protection degree	IK 07		IK 07	
IP rating	IP65		IP65	
Insulation class	I		I	
Control gear	Constant voltage LED driver (included)		Conventional ballast (included)	
Lamp type	LED 24 VDC 		TC-D 	
Lamp wattage	Mono: 1 x 10W Double: 2 x 10W		26W	
Luminous efficacy	Mono: 1400 lm - 3000K Double: 2 x 1400 lm - 3000K		-	
Light distribution	Wide beam 120°		-	
Fitting	-		G24d-3	
Light colour	White 3000K White 2700K 4000K (on request)		-	
Voltage connection	220-240V · 50/60Hz		220-240V · 50/60Hz	
CRI	>90		-	
Emergency	-		-	
Energy efficiency class	A++		A	
Note	Mono direction light 	Double direction light 	Mono direction light 	Double direction light 





DB11



matt white painted



silver

LAMPADA DA ESTERNO IP65 E IK05.


DB11 è un apparecchio per esterni a parete a mono o biemissione, disponibile con finitura bianca o silver. È un'applicque che rompe l'oscurità per creare efficaci atmosfere luminose, esaltando percorsi e punti di accesso, facciate e volumi. Sotto le sue linee semplici ed eleganti, una tecnologia avanzata che si integra perfettamente con l'ambiente che lo circonda.

DB11 ha un corpo in alluminio pressofuso, un diffusore in vetro satinato, oltre a guarnizioni in silicone e viti interne in acciaio inox che lo rendono ideale per ambienti esterni.

IP65 AND IK05 LUMINAIRE FOR OUTDOORS.

DB11 is an outdoor luminaire with mono or bi-emission. Available with white or silvery finishings, it is a product which breaks into darkness creating suggestive luminescent settings and valorizing facades, paths, entrances and volumes. Under its simple and elegant lines, lies an advanced technology which perfectly fits in the environment surrounding it.

DB11 has an internal body in die-cast aluminium, a satin-glass diffuser, silicone gaskets and internal inox-steel screws which make it the ideal product for outdoor environments.

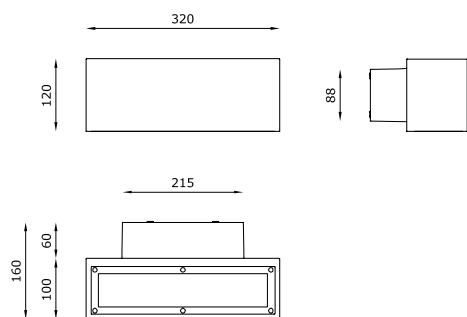

CODE COMPOSITION

203_ 2 S 00 E _ ND

light colour

27 2700K
30 3000K
40 4000K

finishing

WH white
SL silver

type

1 mono direction light
2 double direction light

203_ 6 S 00 E 00 ND

finishing

WH white
SL silver

type

3 mono direction light
4 double direction light

example of code composition

2031 WH 2 S 00 E 30 ND

TECHNICAL FEATURES

Code	2031 XX / 2032 XX		2033 XX / 2034 XX	
Type	Wall lamp		Wall lamp	
Material	Aluminum		Aluminum	
Finishing	White Silver		White Silver	
Weight	3.8 Kg		3.8 Kg	
Mounting	Wall mounting		Wall mounting	
IK protection degree	IK 07		IK 07	
IP rating	IP65		IP65	
Insulation class	I		I	
Control gear	Constant voltage LED driver (included)		Conventional ballast (included)	
Lamp type	LED 24 VDC 		TC-D 	
Lamp wattage	Mono: 1 x 13W Double: 2 x 13W		2 x 26W	
Luminous efficacy	Mono: 1700 lm - 3000K Double: 2 x 1700 lm - 3000K		-	
Light distribution	Wide beam 120°		-	
Fitting	-		G24d-3	
Light colour	White 3000K White 2700K 4000K (on request)		-	
Voltage connection	220-240V · 50/60Hz		220-240V · 50/60Hz	
CRI	>90		-	
Emergency	-		-	
Energy efficiency class	A++		A	
Note	Mono direction light 	Double direction light 	Mono direction light 	Double direction light 

General information

Le apparecchiature illustrate in questo catalogo, sono state progettate e costruite in conformità alle vigenti normative nazionali ed internazionali. Tutti gli apparecchi sono realizzati in conformità alle Direttive comunitarie EEC 73/23 LVD – EEC 89/336 EMC – EEC 93/68 CE Mark e muniti di marcatura **CE**.

*The luminaires described in this catalogue have been designed and built in compliance with the applicable local and international regulations. All the luminaires have been built in conformity with the EEC 73/23 LVD – EEC 89/336 EMC – EEC 93/68 CE Mark European directives and provided with **CE** Mark.*

GRADO DI PROTEZIONE PROTECTION GRADE

corpi solidi (prima cifra) <i>solid bodies (first numeral)</i>		corpi liquidi (seconda cifra) <i>liquids (second numeral)</i>	
0_	Non protetto <i>No protection</i>	_0	Non protetto <i>No protection</i>
1_	Protetto da solidi superiori a $\varnothing$ 50 mm <i>Protection against solid bodies larger than $\varnothing$ 50 mm</i>	_1	Protetto dalla caduta verticale di gocce di acqua <i>Protected against vertically falling water drops</i>
2_	Protetto da solidi superiori a $\varnothing$ 12 mm <i>Protection against solid bodies larger than $\varnothing$ 12 mm</i>	_2	Protetto dalla caduta di gocce di acqua con involucro inclinato max 15° <i>Protected against vertically falling water drops when enclosure is tilted up to 15°</i>
3_	Protetto da penetrazione di sonda con $\varnothing$ superiore a 2,5 mm <i>Protection against penetration by probes larger than $\varnothing$ 2.5 mm</i>	_3	Protetto dalla pioggia <i>Protected against rain</i>
4_	Protetto da penetrazione di sonda con $\varnothing$ superiore a 1 mm <i>Protection against penetration by probes larger than $\varnothing$ 1 mm</i>	_4	Protetto dagli spruzzi di acqua <i>Protected against spraying water</i>
5_	Protetto contro l'ingresso di polvere <i>Protection against ingress of dust</i>	_5	Protetto da getti di acqua <i>Protected against water jets</i>
6_	Stagno alla polvere <i>Dust-tight</i>	_6	Protetto dalle onde <i>Protected against powerful water jets</i>
		_7	Stagno alla sommersione <i>Sealed against immersion</i>
		_8	Stagno alla sommersione <i>Sealed against immersion</i>

CLASSE DI ISOLAMENTO INSULATION CLASS

	Classe 0 Class 0	Apparecchio dotato di solo isolamento funzionale. Protezione: data dall'ambiente. <i>Luminaire with functional insulation only. Protection: given by the environment.</i>
	Classe 1 Class 1	Apparecchio dotato di isolamento di base. Protezione: collegamento delle parti metalliche accessibili alla terra di protezione. <i>Luminaire with basic insulation. Protection: connection of the accessible metal parts to the earthing protection.</i>
	Classe 2 Class 2	Apparecchio dotato di doppio isolamento. Protezione: mediante isolamento supplementare. <i>Luminaire with double insulation. Protection: through additional insulation.</i>
	Classe 3 Class 3	Apparecchio idoneo per alimentazione a bassissima tensione di sicurezza. Protezione: intrinsecamente sicuro. Le parti che portano corrente possono essere accessibili. <i>Luminaire suitable for supply at safety extra low voltage. Protection: intrinsically safe. The live parts can be accessed.</i>

CLASSIFICAZIONE SECONDO IL MATERIALE DELLA SUPERFICIE DI INSTALLAZIONE RATING ACCORDING TO THE MOUNTING SURFACE MATERIAL.

	Apparecchio predisposto per il montaggio diretto su superfici infiammabili. <i>Luminaire designed for direct mounting on inflammable surfaces.</i>
	Apparecchio idoneo ad essere installato su superfici normalmente infiammabili rispettando la distanza indicata tra prodotto e pareti. <i>Luminaire designed for installation on normally inflammable surfaces provided that the distance indicated between product and walls is respected.</i>
	Apparecchio idoneo per montaggio solo su superfici non infiammabili. <i>Luminaire designed for mounting only on non-inflammable surfaces.</i>

APPROVATA QUALITÀ APPROVED QUALITY



TCNA
TCNA

TCNA, Tile Council of North America, è l'ente Americano che certifica l'AirCoral® come materiale:
ANTIBATTERICO capace di eliminare i batteri dalle superfici;
ANTINQUINANTE capace di ridurre gli elementi inquinanti presenti nell'aria;
FOTOCATALITICO capace di ridurre gli elementi dannosi.

*TCNA, Tile Council of North America, is the American body that has certified the AirCoral® material as:
ANTIBACTERIAL able to eliminate bacteria on its surfaces
ANTI-POLLUTING able to reduce polluting elements in the air
PHOTOCATALYTIC able to reduce harmful elements.*



REACH - sicurezza chimica
REACH - chemical safety

Regolamentazione e certificazione (direttiva Parlamento Europeo) per la produzione di sostanze chimiche, con lo scopo di proteggere l'uomo e l'ambiente da sostanze tossiche.
Il prodotto AirCoral® è privo di sostanze tossiche, non contiene elementi dannosi per la salute dell'uomo o inquinanti secondo l'elenco registrato dall'Agenzia Europea delle sostanze chimiche (ECHA).

*Regulation and certification (European Parliament directive) for the production of chemical substances, in order to protect people and environment against toxic substances.
The AirCoral® product is devoid of toxic substances, it does not contain noxious elements for the human health or polluting elements according to the registered list of the European Agency for chemical substances (ECHA).*



MADE IN ITALY
Iscrizione Buzzi IT
MADE IN ITALY IT
Registration Buzzi

Istituto per la tutela dei produttori italiani. Certifica che la collezione Buzzi & Buzzi è interamente prodotta in Italia, non importata ed utilizza la migliore componentistica elettronica europea. Una garanzia per la lotta alla contraffazione del made in Italy, troppo spesso solo dichiarato senza essere ufficialmente certificato, e per un'assoluta tutela dei consumatori finali. Grazie al certificato "Made in Italy Certificate", si fa netta la distinzione tra la produzione 100% made in Italy e quella semplicemente dichiarata ma di dubbia provenienza.

Institute for the tutelage of the Italian manufacturers. It certifies that the Buzzi & Buzzi collection is entirely produced in Italy, not imported and it is using the best European electronic components. A guarantee for the fight against fakes of the made in Italy, too often only declared without being officially certified, and for the absolute tutelage of the final consumers. Thanks to the "Made in Italy Certificate", you can distinguish clearly between the 100% made in Italy production and the one simply declared but with doubtful origin.



Certificazione Europea
European Certification

Conformità Européenne. La Società Buzzi & Buzzi è certificata da Ente Terzo notificato per la sicurezza dei propri prodotti che garantisce la conformità alle più restrittive norme tecniche vigenti.

European Conformity. The company Buzzi & Buzzi is certified by a notified Third Board for the security of the own products, guaranteeing the conformity to the most restrictive technical regulations in force.



Certificazione Gost - R
Certification Gost - R

Certificazione della qualità del prodotto e conformità alle normative ed esigenze della federazione russa.

Product quality certification in conformity to the regulations and requirements of the Russian Federation.



Certificazione LEED
LEED Certification

La certificazione LEED, Leadership in Energy and Environmental Design, è lo standard riconosciuto per misurare l'impatto ambientale e la sostenibilità degli edifici. Ottenere la certificazione LEED è il miglior modo per dimostrare che un edificio, in ogni sua parte, è veramente "green".

LEED (Leadership in Energy and Environmental Design) certification is the recognised standard for measuring the environmental impact and sustainability of buildings. LEED certification is the best proof that a building is well and truly "green".



Certificazione UL
UL Certification

UL, Underwriters Laboratories, è il laboratorio di prova maggiormente riconosciuto per l'omologazione degli apparecchi commercializzati in America.
La collezione Buzzi & Buzzi è in fase di certificazione; contattare l'azienda per ulteriori informazioni.

UL, Underwriters Laboratories, is the best recognised test lab for the certification of devices traded in America. Buzzi & Buzzi's collection is currently in the process of being certified. Please contact the company for further information.



Certificazione ETL
ETL Certification

ETL, Electrical Testing Laboratories, è una certificazione di sicurezza. Indica che il prodotto è stato testato per poter essere venduto e distribuito nel territorio nordamericano. La collezione Buzzi & Buzzi è certificata; si prega di contattare per ulteriori aggiornamenti.

ETL, Electrical Testing Laboratories, is a quality certification. It guarantees that the product was tested before being sold and delivered within the North American boundaries. The collection of Buzzi & Buzzi is certified; for further updates, please contact us.

DC DURCORAL®

SPECIFICHE SPECIFICATIONS

Colore (decorabile) Color (paintable)	standard DurCoral® Bianco ghiaccio standard color DurCoral® Ice white
Resistenza all'umidità Humidity resistance	elevatissima very high
Porosità all'acqua Porosity to water	≤ 2% ≤ 2%
Resistenza al gelo /disgelo severo Resistance to severe freezing / thawing	elevatissima very high

Resistenza meccanica alla compressione
Compressive strength

≥ 140 N/mm²
≥ 140 N/mm²

Resistenza meccanica alla flessione
Flexural strength

≥ 55 N/mm²
≥ 55 N/mm²

Spolverabilità di superficie
Surface sprinkling ability

≤ 7 gr/mq
≤ 7 gr/mq

B

B-INSIDE	56
B30	62
B55	68

C

C1	48
----	----

D

DB9	268
DB10	272
DB11	276

F

F40	246
F50	158

G

GENIUS BASIC NAKED	170
GENIUS BASIC NAKED IP65	242
GENIUS CONCRETE	180
GENIUS NAKED	172
GENIUS NAKED IP65	244
GL 220V	138
GL 48V	44

H

H2NOT	250
H2STOP	254

I

INCISO Q4 220V	132
INCISO Q4 48V	38

L

L1	50
L40	144

M

M1	212
M1 220V	114
M1 48V	32
MIKADO	232
ML 220V	136
ML 48V	42

N

N-INSIDE	86
N10	92

Q

Q1	216
Q1 220V	118
Q1 48V	34
Q2 220V	122
Q3 220V	126
Q4 220V	130
Q4 48V	36

S

S1	260
S1G	264

T

THE DARK	230
THE LINE	226
THE TUBE	222
THE TUBE 48V	46
TWIN GENIUS NAKED	178

X

X1	186
X1 220V	104
X1 48V	26
X1 NANO 48V	78
X2	192
X3	198
X4	202
XJR8	162
XJR9	166

Y

Y1	206
Y1 220V	106
Y1 48V	28
Y1D	156

Z

Z1	210
Z1 220V	110
Z1 48V	30
Z1 NANO 48V	80

0

0008KIT
0009KIT

1

1012	217
1021	247
1022	159
1031	163
1032	164
1033	164
1034	163
1041	167
1042	168
1043	168
1044	167
1053	157
1061	174
1062	174
1065	179
1066	179
1071	171
1072	171
1075	182
1076	182
1101	187
1102	188
1111	207
1112	207
1121	211
1122	211
1131	223
1132	223
1135	233
1136	233
1140	231
1141	231
1145	227
1146	227
1201	197
1202	193
1301	200
1302	199
1401	203
1501	213
1502	214

2

2011	269
2012	269
2013	269
2021	273
2022	273
2023	273
2024	273
2031	277
2032	277
2033	277
2034	277
2041	251
2042	252
2043	252
2044	251
2051	255
2052	256
2053	256
2054	255
2061	247
2071	243
2072	243
2075	245
2076	245
2082	265
2083	261

H

H8060.LED	164
H8350	159
H8350DA.AM	163
H8350PH.AM	163
H8500.B	159
H8500.C	159
H8500.E	163
H8700.E	157

T

T048 A 00001 W1	64
T048 A 00002 B1	58
T048 A 00003 W1	64
T048 A 00004 B1	58
T048 A 00005 W1	64
T048 A 00006 B1	58
T048 A 00007 W1	65

T048 A 00008 B1	59
T048 A 00009 W1	65
T048 A 00010 B1	65
T048 A 00011 W1	71
T048 A 00012 B1	59
T048 A 00013 W1	65
T048 A 00014 B1	65
T048 A 00015 W1	71
T048 A 00016 B1	59
T048 A 00018 B1	72
T048 A 00019 W1	66
T048 A 00020 B1	66
T048 A 00021W1	72
T048 A 00022 B1	72
T048 A 00023 B1	60
T048 A 00024 00	66
T048 A 00025 00	60
T048 A 00056 B1	72
T048 A 00057 B1	72
T048 A 00058W1	67
T048 A 00059 B1	67
T048 A 00060 00	61
T048 A 00061 B1	88
T048 A 00062 B1	95
T048 A 00063 B1	89
T048 A 00064 B1	88
T048 A 00065 B1	88
T048 A 00066 B1	89
T048 A 00067 B1	89
T048 A 00068 B1	96
T048 A 00069 B1	96
T048 A 00070 B1	97
T048 L 00001	27
T048 L 00002	29
T048 L 00003	31
T048 L 00004	33
T048 L 00005	35
T048 L 00008	37
T048 L 00009	43
T048 L 00010	45
T048 L 00011	47
T048 L 00012	49
T048 L 00013	49
T048 L 00014	51
T048 L 00015	51
T048 L 00016	39
T048 L 00017	79
T048 L 00018	81
T048 T 00	57
T048 T 01	63

T048 T 02	69
T048 T 04	93
T048 T 05	87
T220 A 00027 W2	146
T220 A 00028 B1	146
T220 A 00029 W2	146
T220 A 00030 B1	146
T220 A 00031 W2	147
T220 A 00032 B1	147
T220 A 00033 W2	147
T220 A 00034 B1	147
T220 A 00035 W2	148
T220 A 00036 B1	148
T220 A 00037 W2	148
T220 A 00038 B1	148
T220 A 00039 W2	147
T220 A 00040 B1	147
T220 A 00041 W2	149
T220 A 00042 B1	149
T220 A 00043 W2	149
T220 A 00044 B1	149
T220 A 00045 W2	150
T220 A 00046 B1	150
T220 A 00047 W2	150
T220 A 00048 B1	150
T220 A 00050 W2	148
T220 A 00051 B1	148
T220 A 00052 W2	149
T220 A 00053 B1	149
T220 A 00054 W2	146
T220 A 00055 B1	146
T220 L 00001	105
T220 L 00002	107
T220 L 00003	111
T220 L 00004	115
T220 L 00005	119
T220 L 00006	123
T220 L 00007	127
T220 L 00008	131
T220 L 00009	137
T220 L 00010	139
T220 L 00016	133
T220 T 03	145
TRK 00000 42	60
TRK 00001 69	90

V

VTR0000019	231
------------	-----

Buzzi & Buzzi si riserva la facoltà di variare o modificare, senza preavviso, le dimensioni e le caratteristiche tecniche dei prodotti indicati in questo catalogo in funzione delle necessità operative, per migliorarne la funzionalità o in adeguamento a normativa di legge.

Buzzi & Buzzi reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulation.





Legal Office

20060 Pozzo d'Adda (MI) via Milano 17, Italy

Headquarter

24040 Canonica d'Adda (BG) via Pascoli 5, Italy

Tel. +39 02 9094942 - +39 02 9094944

Fax +39 02 9094006

buzzi@buzzi-buzzi.it

www.buzzi-buzzi.it